



ALTAIR

Altair® FluxMotor® 2025.1

Synchronous Machines with wound field – Inner Salient Pole - Inner rotor

Motor Factory – Export

General user information

Contents

1	Motor factory – Export AREA – Home page view	4
1.1	“DOCUMENT”	4
1.2	“ADVANCED TOOLS “	4
2	Make a report	5
2.1	Overview	5
2.2	Area to build the report.	5
2.3	Steps to build and export a report.	5
2.4	Section selection	6
2.4.1	List of sections available to build the report	6
2.4.2	Selection of sections	7
2.5	Export information	8
3	Export a script	9
3.1	Overview	9
3.2	Area to build the script export.	9
4	Build and export a connector for Altair® HyperStudy®	10
4.1	Overview	10
4.2	Area to build a connector	10
4.3	Steps to build and export a connector	11
4.4	Test selection	11
4.5	Test configuration	12
4.6	Parameters for HyperStudy®	13
4.6.1	Selection of design parameters	13
4.6.2	Selection of test data	14
4.7	Export information	15
4.8	Get back Altair® HyperStudy® results in Altair® FluxMotor®	17
4.9	Connection between FluxMotor® and HyperStudy®	18
	Warning: Mandatory synchronization between connector and FluxMotor versions.	18
5	Build and export a model in Altair® Flux® 2D environment	20
5.1	Overview	20
5.2	Area to build and to export a model to Flux® 2D environment.	20
5.3	Steps to build and export a model to Flux® 2D environment.	21
5.4	Test selection	22
5.5	Test configuration	23
5.6	Export information	24
5.7	Available models to be exported and user inputs.	25

5.7.1	Overview	25
5.7.2	Without scenario – Current source – Motor and generator – Basic model	25
5.7.2.1	Positioning and objective	25
5.7.2.2	Standard inputs	26
5.7.2.3	Advanced inputs	26
5.7.3	Characterization – Open circuit – Motor & Generator – Back – emf	27
5.7.3.1	Positioning and objective	27
5.7.3.2	Settings	27
5.7.3.3	Standard inputs	27
5.7.3.4	Advanced inputs	27
5.7.4	Characterization – Short circuit – Motor & Generator – Three / Two / Single Phase	28
5.7.4.1	Positioning and objective	28
5.7.4.2	Settings	28
5.7.4.3	Standard inputs	28
5.7.4.4	Advanced inputs	29
5.7.5	Working point – Sine wave – Motor – If, I, Ψ , N	30
5.7.5.1	Positioning and objective	30
5.7.5.2	Settings	30
5.7.5.3	Standard inputs	31
5.7.5.4	Advanced inputs	32
5.7.6	List of generic advanced inputs	33
6	Build and export a model in Altair® Flux® SKEW environment	34
6.1	Overview	34
6.2	Area to build and to export a model to Flux® SKEW environment.	34
6.3	Particularities in building and to exporting a model to Flux® Skew environment.	35
7	Export to SYSTEM	36
7.1	Overview	36
7.2	Area to export LUT	36
7.3	Steps to build an export LUT	37
7.3.1	Introduction	37
7.3.2	Test selection	37
7.3.3	Test configuration	37
7.3.4	Export information	38
7.4	FMU format files	39
7.4.1	Compatibility	39
7.4.2	A C/C++ compiler is needed	40
7.4.2.1	C/C++ compiler / System requirements	40
7.4.2.2	Access path of the C/C++ Compiler	40
7.4.3	Import FMU data in Altair® Activate®	41
7.5	MAT format files	44
7.5.1	Introduction	44

1 MOTOR FACTORY – EXPORT AREA – HOME PAGE VIEW

The area “EXPORT” of Motor Factory groups two main families of functions:


1.1 “DOCUMENT”

In “DOCUMENT”, the function “REPORT” allows building reports automatically to describe all the work achieved for the design as well as for the tests.

Then, the function “SCRIPT” allows to build and export a python script of a current motor in the application Script Factory or in a targeted folder.

1.2 “ADVANCED TOOLS “

In “ADVANCED TOOLS”, the functions “FLUX 2D”, FLUX SKEW allow to build and export a model in Altair® Flux® environment (2D, or Skew) for performing advanced studies either with magneto static or transient applications.

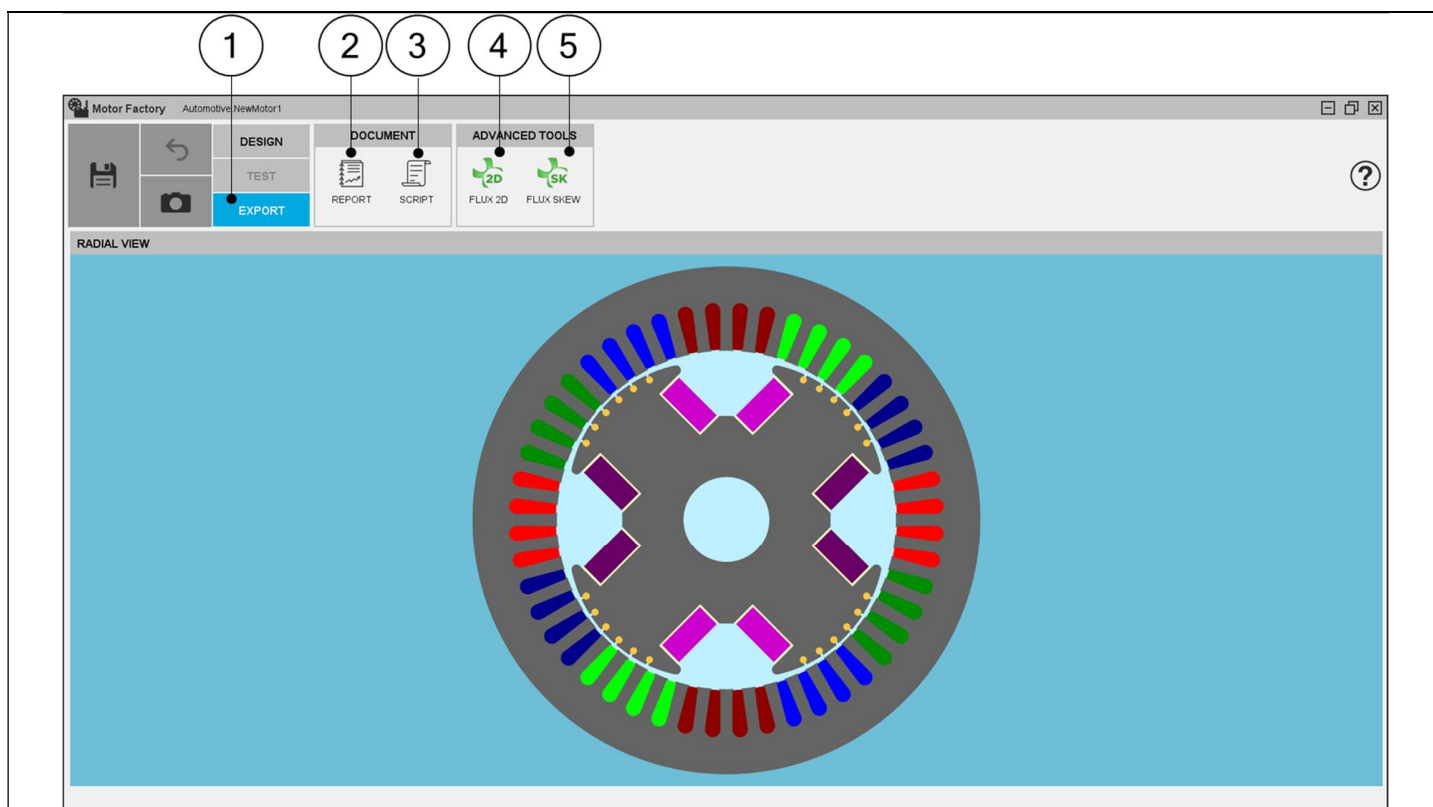

Motor Factory - EXPORT area

1	Selection of the EXPORT area of Motor Factory.
2	Access the area “REPORT” in which a report can be made
3	Access the area “SCRIPT” for generating a python file in which all the needed command lines are written to rebuild the motor
4	Access the area “FLUX2D” in which a model can be made and sent to Altair® Flux® 2D
5	Access the area “FLUX SKEW” in which a model can be made and sent to Flux® Skew


2 MAKE A REPORT

2.1 Overview

The aim of this export is to build and quickly export a report showing all the work achieved to design and test the machine.

As a result, the report can be exported in a pdf or html file format. It can also be attached to the motor in the "Motor Catalog" or simply displayed in the report area.

2.2 Area to build the report.

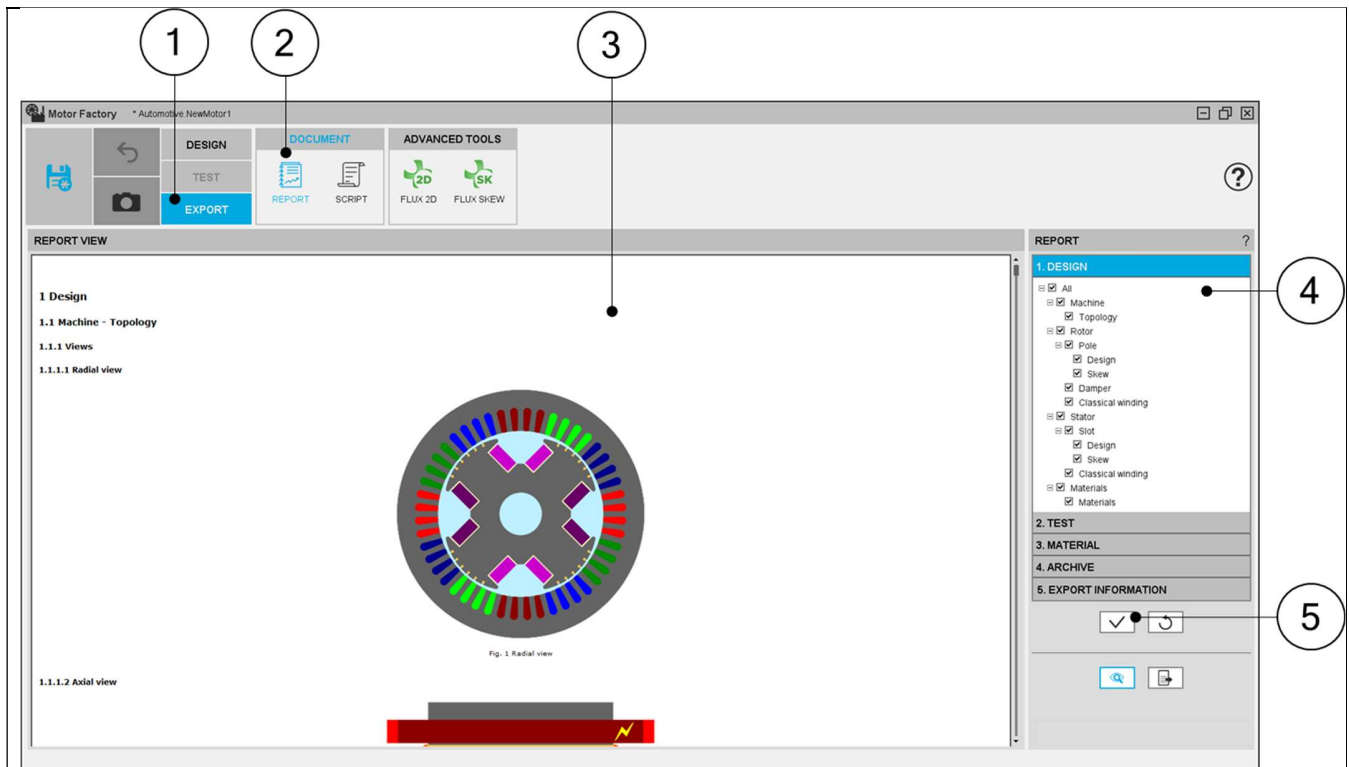

Motor Factory – EXPORT AREA – Export a report

1	Selection of the EXPORT area of Motor Factory.
2	Access the area in which a report can be made
3	Zone to visualize the report (= preview)
4	5 steps to build the report which user need
5	Buttons to validate inputs, display a preview and export a report


2.3 Steps to build and export a report.

Five steps are needed to build and export a report: In EXPORT / DOCUMENT / REPORT area:

- 1) Select the sections to write dealing with the design.
- 2) Select the sections to write dealing with the tests.
- 3) Select the sections to write dealing with the materials.
- 4) Select the "saved test results" you want to add as archive in the report.
- 5) Define the export information.

2.4 Section selection


2.4.1 List of sections available to build the report

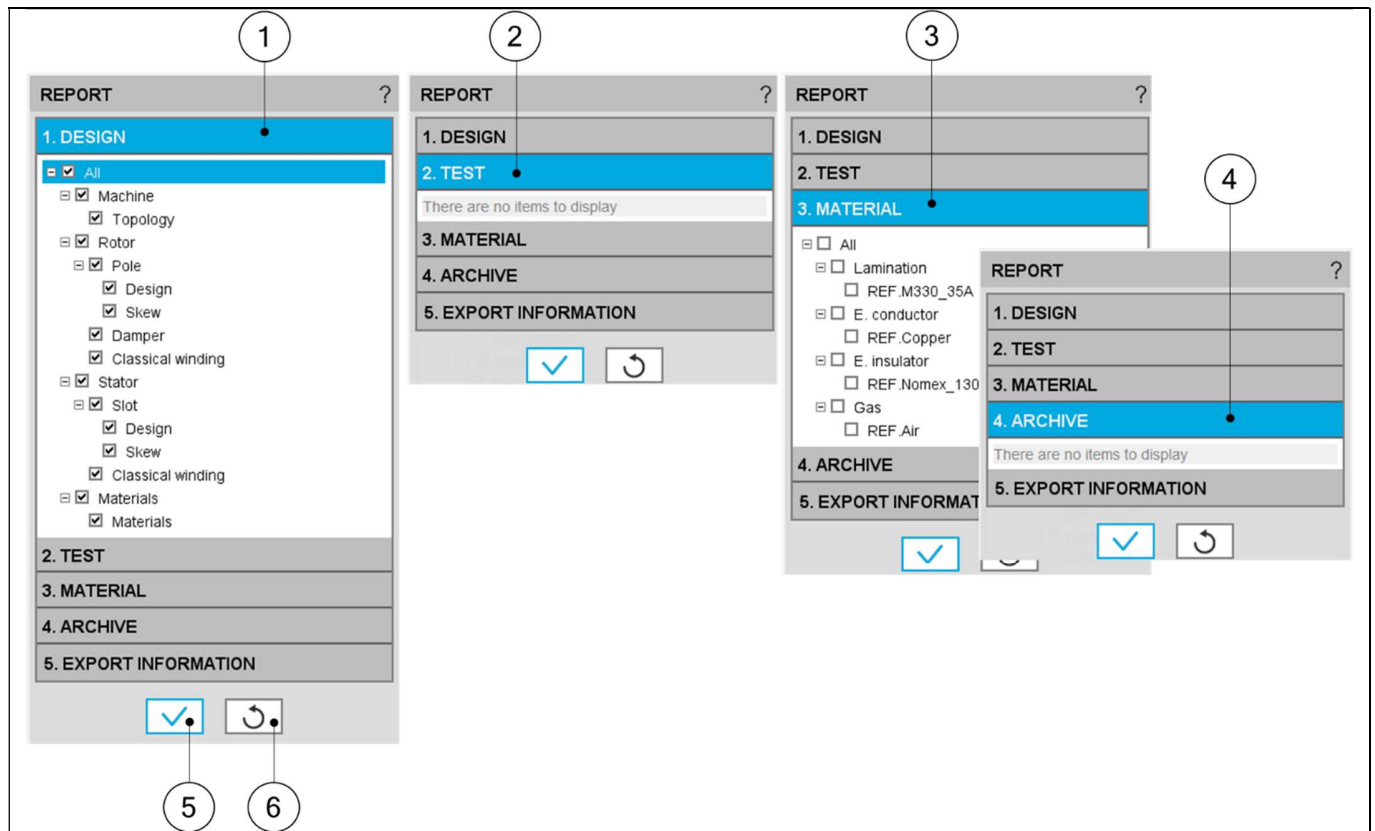

Motor Factory - EXPORT AREA – Export a report – Chapters to be selected

1	Chapters to describe the DESIGN. Machine, Rotor and Stator characteristics.
2	Chapters to describe the TEST results. (TEST will be available in the next versions) All the test results are available as soon as the corresponding computations are performed.
3	List of materials used to build the machine can be added to the report with all their physical properties.
4	Archive groups all the tests which have been saved during the process. These can be added to the report. Note: A maximum of five results per test can be added to the report.
5	Button to apply the selection of the user input selections (selection of chapters)
6	Button to restore default values.


2.4.2 Selection of sections

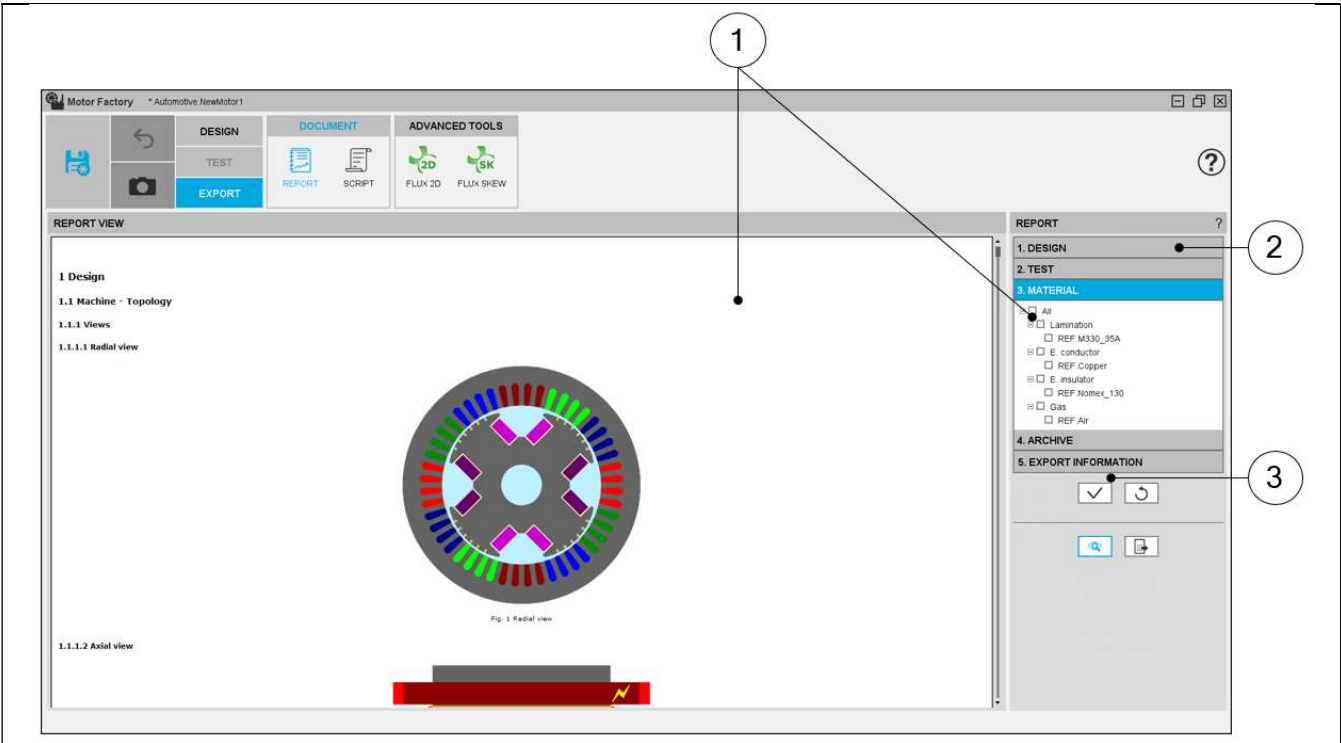

Motor Factory - EXPORT AREA – Export a report – Chapters to be selected

1	Section names are shortcuts for displaying the corresponding section of the report: DESIGN, TEST, MATERIAL, ARCHIVE, EXPORT INFORMATION. Note: TEST and ARCHIVE will be available later when one will be able to perform tests dedicated to Wound field synchronous machines in Motor Factory.
2	Check the section to add chapters to the report
3	Button "Preview" considers the selected chapters and displays the report

2.5 Export information

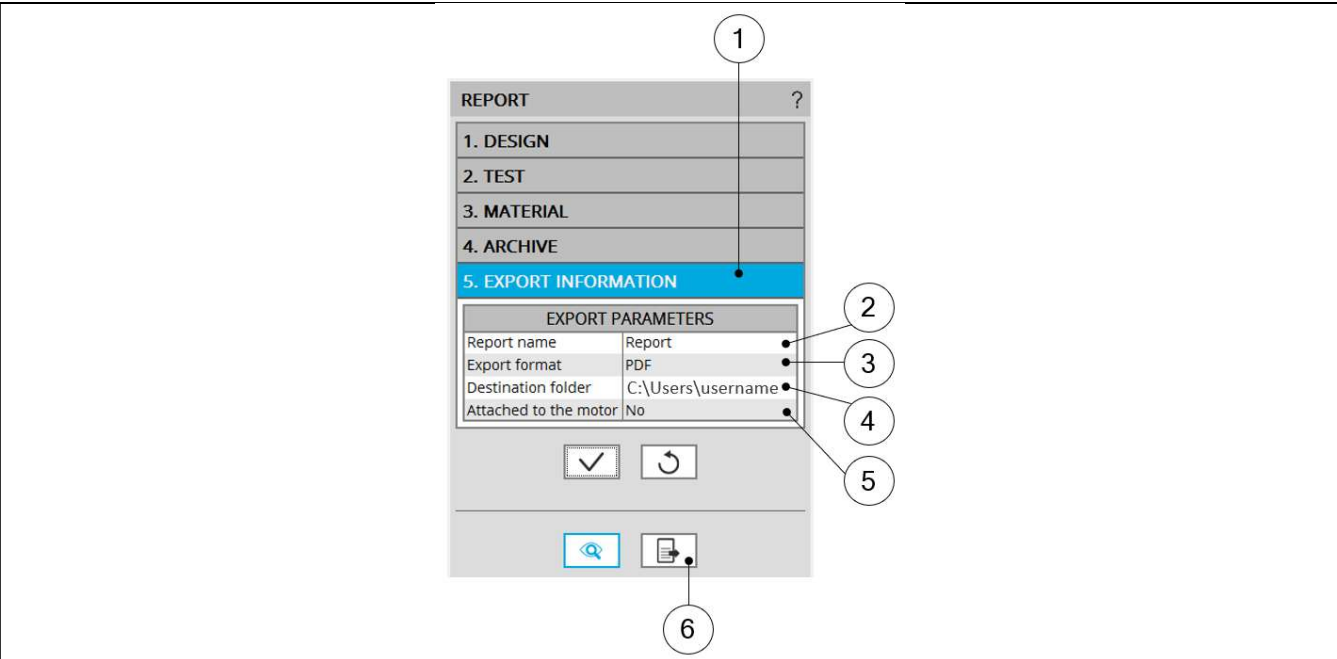

Motor Factory - EXPORT AREA – Export a report – Export information

1	Access to the area in which export parameters can be defined
2	A file name must be written (Default name = "Report")
3	The file format must be chosen (pdf or html) to build the report
4	A folder in which storing the report must be selected via the browser
5	It is possible to attach the report (HTML or PDF file) to the motor in the "Motor Catalog"
6	Button to export the report by considering all the previous defined parameters


3 EXPORT A SCRIPT

3.1 Overview

Next to the function “Report”, the function “Script” gives the capability to build and export a python script file, in which all the needed command lines are written to rebuild the considered motor. The script is generated with all the needed sections and sub-sections in Motor Factory, dedicated to the design, the test, and the exports.

Then Script Factory can be used to automate some study such like running serial tests or serial design configurations.

3.2 Area to build the script export.

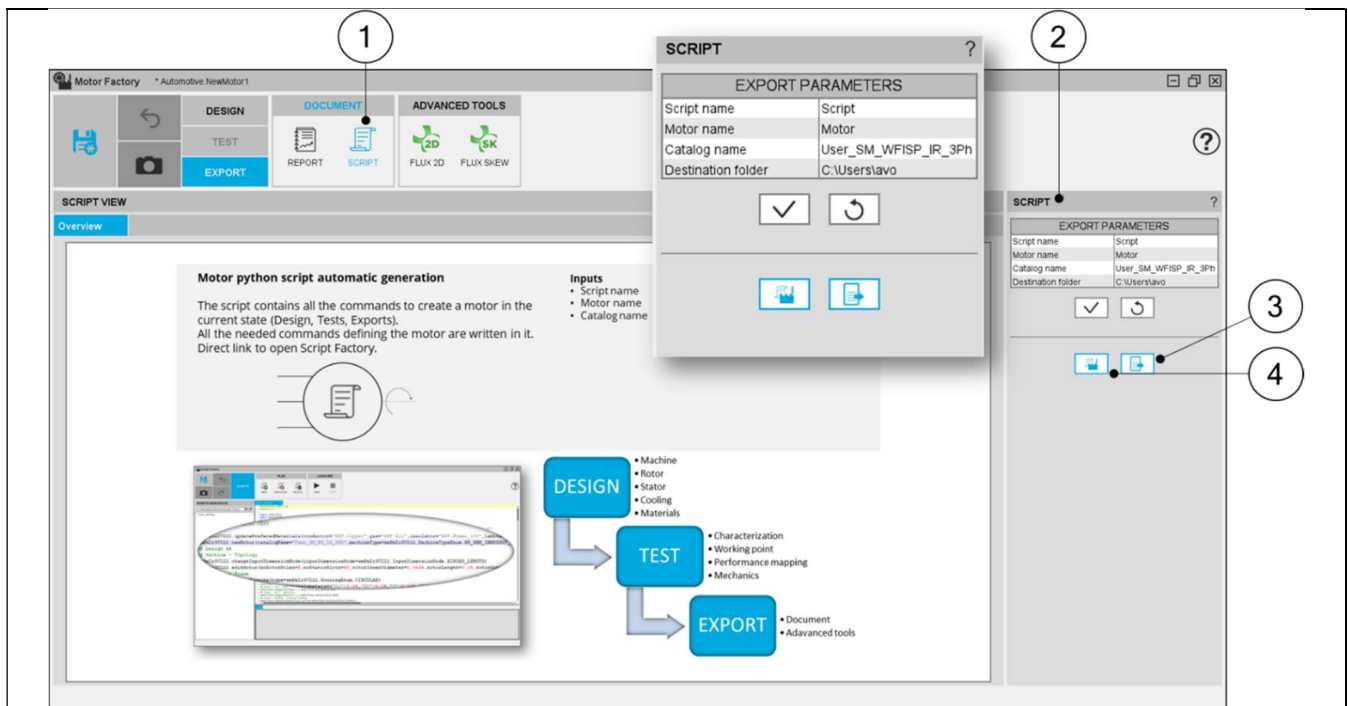

Motor Factory – EXPORT AREA – Export a python script

1	In Motor Factory select EXPORT / SCRIPT environment.
2	The EXPORT / SCRIPT environment user inputs allow to define the name and the location of the new script file + the name of the motor to be rebuilt from the new python script file, with the catalog name in which it will be stored. Note: Without defining other names for the motor and/or the catalog, the original motor would be overwritten while running the new python script file.
3	Button to build and to export the resulting python file.
4	Button to build and export the resulting python file, and then to open it directly in the Script Factory

4 BUILD AND EXPORT A CONNECTOR FOR ALTAIR® HYPERSTUDY®


4.1 Overview

The aim of this export is to build a connector, allowing Altair® HyperStudy® to drive Altair® FluxMotor® for performing motor optimizations based on the computation processes embedded into FluxMotor®.

This can be done for an eligible test list by using input/output parameters defined in FluxMotor®.

Then, after having performing studies with HyperStudy® (Optimization or Design Of Experiment -DOE- for instance), the results can be visualized by selecting the resulting machine in the “Motor Catalog”.

4.2 Area to build a connector

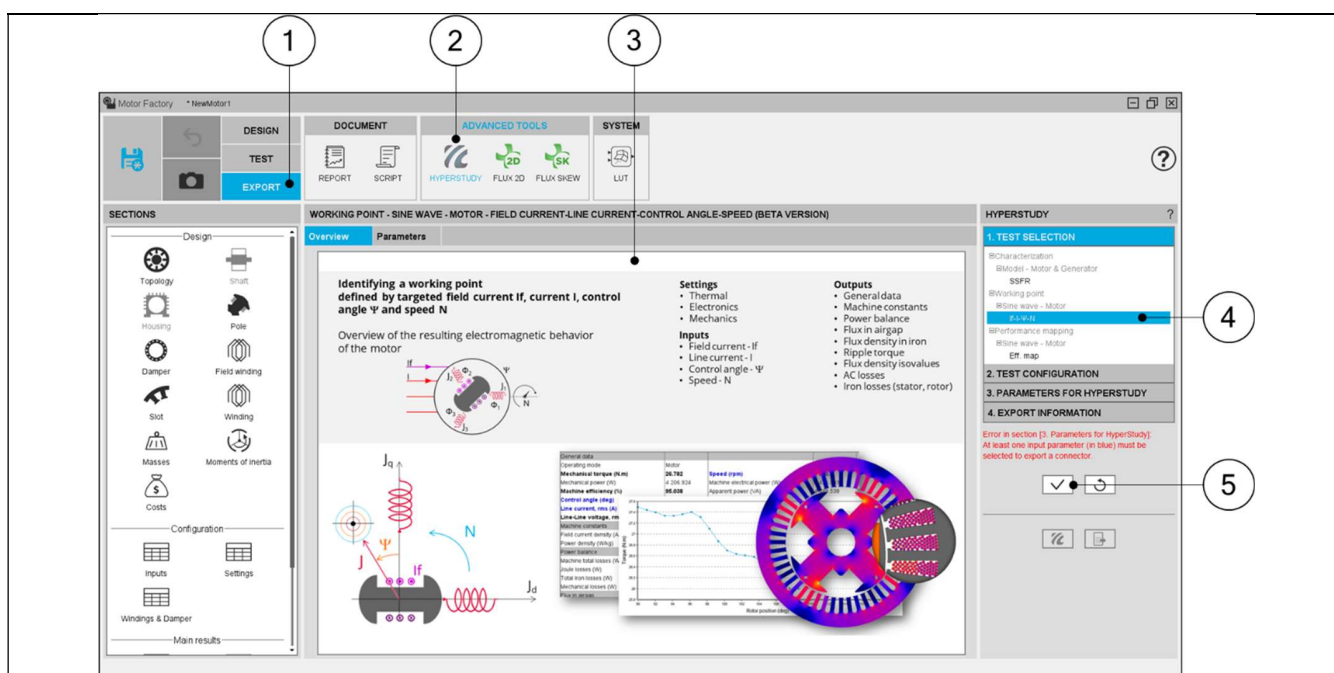

Motor Factory – EXPORT AREA – Export connector for HyperStudy®

1	Selection of the EXPORT area of Motor Factory.
2	Access the area in which a connector for HyperStudy® can be made
3	Zone to visualize either the overview of the selected test or the corresponding user input/output parameters
4	4 steps to build the connector to be exported for HyperStudy®
5	Buttons to validate inputs, display a preview and export the built connector for HyperStudy®

4.3 Steps to build and export a connector

In EXPORT / ADVANCED TOOLS / HYPERSTUDY area, 4 steps are needed to build and export a report:

- 1)

Select the test which will be performed by HyperStudy®
- 2)

Define the test configuration, that means the user inputs/outputs parameters needed to define the test (settings and user inputs of the considered test)
- 3)

Select the inputs/outputs parameters for performing studies with HyperStudy®
- 4)


Define the export information

4.4 Test selection

In the current version of FluxMotor®, 3 tests can be selected for Synchronous machines with wound field:

- Characterization / Model / Motor & generator / SSFR
- Working point / Sine wave / Motor / I-Ψ-N
- Performance mapping / Sine wave / Motor / Efficiency mapping

When a test is selected, the corresponding overview is displayed in the center of the screen, showing the main inputs to be considered.

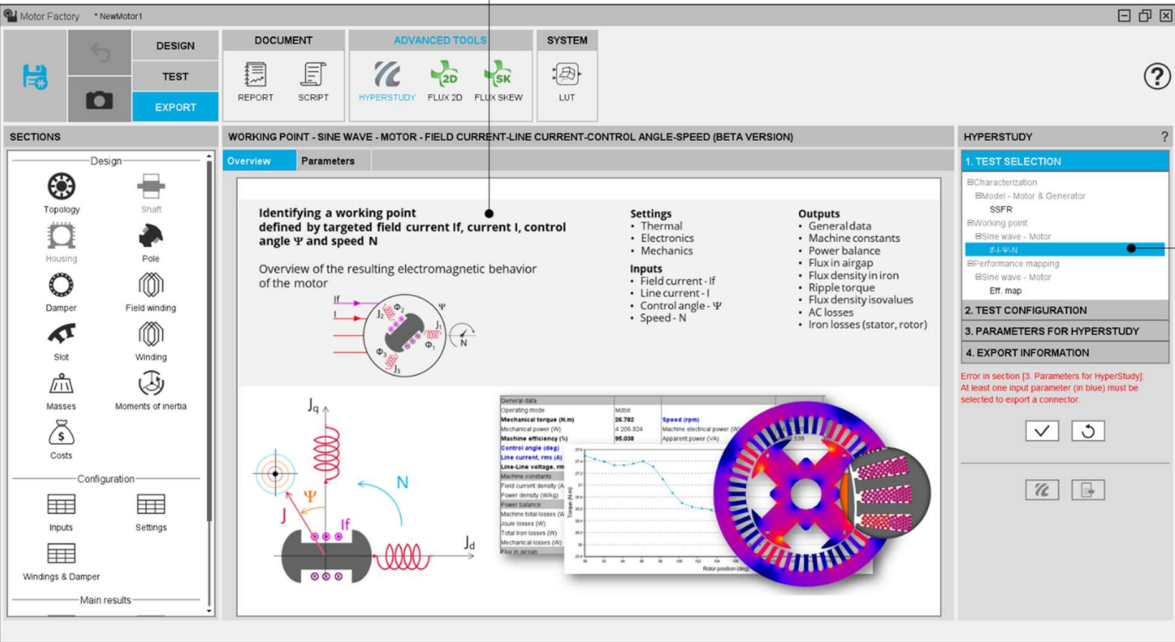

Motor Factory – EXPORT AREA – Export connector for HyperStudy®

1	Selection of a test to be performed by HyperStudy®
2	Display of general information (overview) dealing with the selected test

4.5 Test configuration

After selecting a test, the corresponding test inputs (settings and user inputs) must be defined. This allows to define the initial conditions for testing.

Motor Factory – EXPORT AREA – Export connector for HyperStudy®

1	Overview of the selected test is displayed.
2	User inputs can be defined in the test area.

Note: The user help information about the test parameters is defined in the user help guide of the corresponding test. Please refer to the corresponding section.

4.6 Parameters for HyperStudy®

This section allows to select the parameters which must be available for the optimization in HyperStudy®. These can be designed parameters, parameters to define the test conditions (inputs and/or settings) or test results.

4.6.1 Selection of design parameters

Motor Factory – EXPORT AREA – Export connector for HyperStudy®


Design parameters selection

1	Tab to be expanded to choose input/output parameters for HyperStudy®
2	Area in which input/output parameters are stored for HyperStudy®
3	Shortcuts to select the part of the design to be considered for the selection of parameters
4	All available design inputs are displayed. The corresponding dimension is highlighted when selected - arrow (5). When a parameter is chosen, the associated box is ticked (4), and the parameter name is stored in the selected parameters area (2).
5	Arrow illustrating the selected design input parameter
6	Button to validate the previous choices

Note: Data which are given by the user are written in blue. They are inputs data. Data resulting from internal computations (outputs) are written in black. This allows the users to quickly differentiate between the input data and output data inside data tables.

4.6.2 Selection of test data

The test data groups test results as well as the user inputs and settings. All these data can be selected for optimization in HyperStudy®.

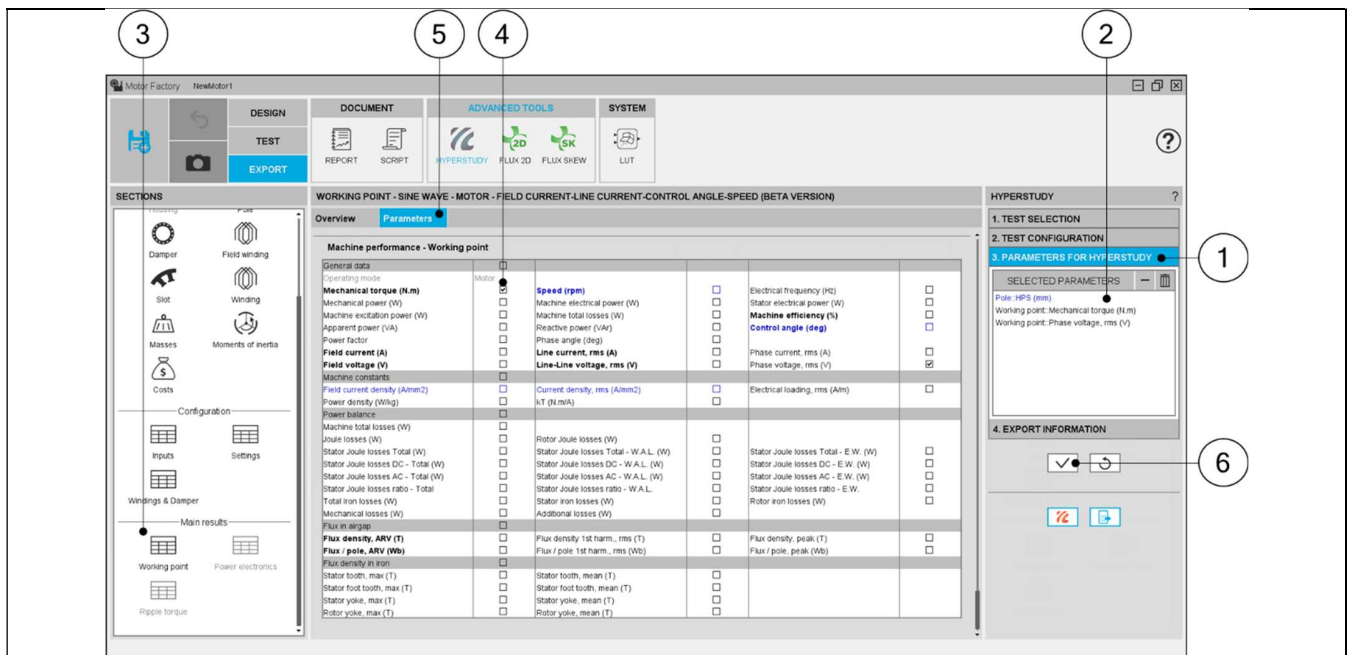

Motor Factory – EXPORT AREA – Export connector for HyperStudy® – Test data selection

1	Tab to be expanded to choose input/output parameters for HyperStudy®
2	Area in which input/output parameters are stored for HyperStudy®
3	Shortcuts to select the part of the test condition and test results to be considered for the selection of parameters
4	All available test data (test results as well as user inputs) are displayed. When a data is chosen, the associated box is ticked (4), and the parameter name is stored in the selected parameters area (2).
5	Display of data which can be selected for HyperStudy® studies
6	Button to validate the previous choices


Note: Data which are given by the user are written in blue. These are inputs data. Data resulting from internal computations (outputs) are written in black. This allows the users to quickly differentiate between the input data and output data inside data tables.

4.7 Export information

The last step for building the connector for HyperStudy® is to define the export information.

There are three data to be defined:

- The name of the connector
- The folder in which the connector must be stored
- The last answer, “Save iteration (Yes/No)” indicates if the results of the HyperStudy® must be stored in a dedicated catalog of Motor Catalog application. When “Yes” is answered all the resulting motors can be visualized in Motor Catalog, and then these can be edited in the Motor Factory very quickly.

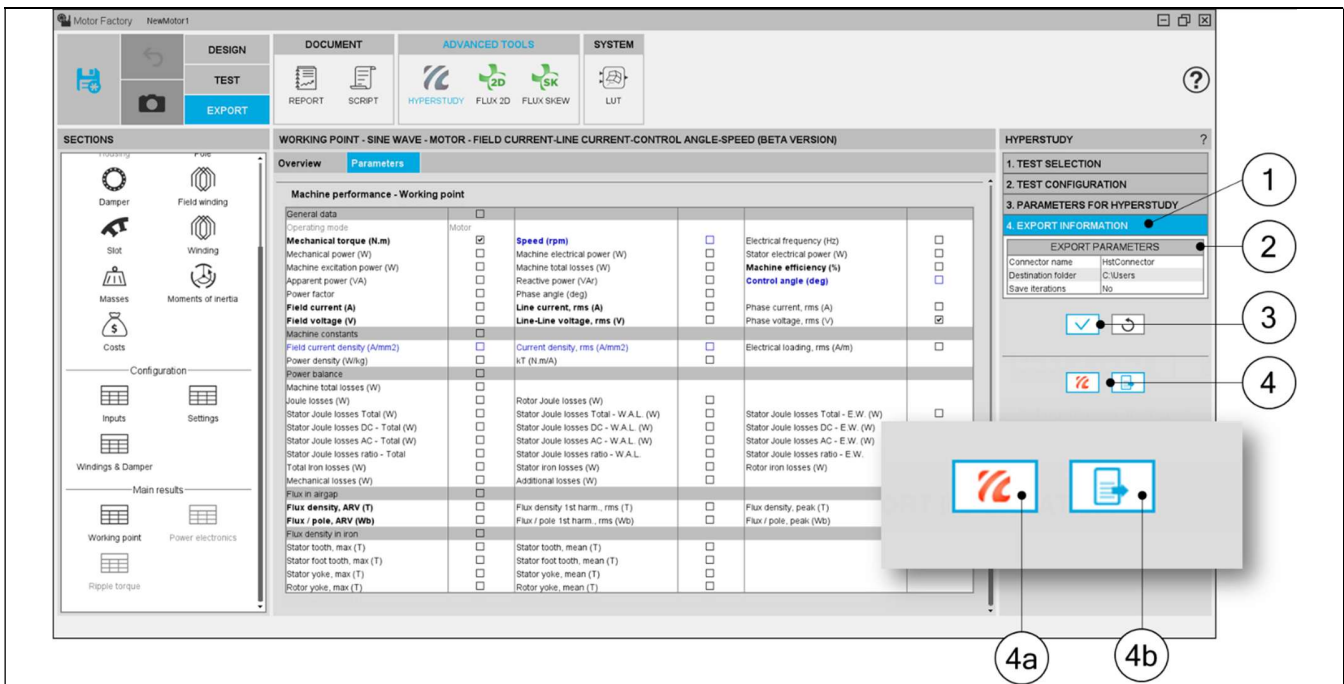

Motor Factory – EXPORT AREA – Export connector for HyperStudy® – Export information

1	Tab to be expanded to define the export information for HyperStudy®
2	Area in which the export parameters to be defined are listed
3	Button to validate the previous choices
4	Buttons to finalize the export.
4a	To finalize this operation from FluxMotor, a first button allows to directly and automatically launches HyperStudy, builds and load the connector to perform the optimization.
4b	Button to finalize the export of the connector. When one clicks on this button, this opens the folder where the connector is stored.

Note: When one clicks on this button (4a), HyperStudy is automatically opened, with the connector built by FluxMotor uploaded. The studies can be initialized and run immediately in HyperStudy. The input variables as well as the Output responses that have been selected in FluxMotor are automatically identified and uploaded.

Note: When data is missing in the third table; “Parameters for HyperStudy®” for instance, an error message is displayed in the red color font which indicates, what is missing and where. If all the needed information is missing, exporting a connector is not allowed.

HYPERSTUDY ?

1. TEST SELECTION

2. TEST CONFIGURATION

3. PARAMETERS FOR HYPERSTUDY

4. EXPORT INFORMATION

EXPORT PARAMETERS

Connector name	HstConnector
Destination folder	D:\ForHyperStudy
Save iterations	Yes

Error in section [3. Parameters for HyperStudy]:
At least one input parameter (in blue) must be selected to export a connector.

✓

↺

⚙

•

1

2

Motor Factory – EXPORT AREA – Export connector for HyperStudy® – Error message

1	Error message written in red font
2	The two buttons to export the connector and run launch HyperStudy are not active if the needed data is missing

4.8 Get back Altair® HyperStudy® results in Altair® FluxMotor®

All the motors resulting from the test runs performed with HyperStudy® can be used back in Motor Catalog of FluxMotor®, and then these can be edited in Motor Factory very quickly.

Motor Catalog – Visualization of results got from HyperStudy®

1	A catalog is automatically built by using the name of the connector defined by the user.
2	All the test runs performed with HyperStudy® are stored in the dedicated catalog.
3	Each motor can be selected, visualized, and edited in the Motor Factory, to be evaluated more in depth.

4.9 Connection between FluxMotor® and HyperStudy®

Before starting new studies in HyperStudy® by using connectors exported from FluxMotor®, FluxMotor® must be registered as a new solver script in HyperStudy®. This must be defined only while using the coupling for the first time.

Label	Varname	Type	Preference	Path
1	RADIOSS	RADIOSS	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/.hwsolvers/scripts/radioss.bat
2	OptiStruct	OptiStruct	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/.hwsolvers/scripts/optistruct.bat
3	MotionSolve	MotionSolve	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/.hwsolvers/scripts/motionsolve.bat
4	Python	Python	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/.common/python/python3.5/win64/pyth
5	Tcl	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hw/tcl/tcl8.5.9/win64/bin/tclsh85.exe
6	Templex	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hw/bin/win64/templex.exe
7	HM Batch	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hm/bin/win64/hmbatch.exe
8	HM BatchMesher	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hm/batchmesh/hw_batchmesh.bat
9	MDL Batch	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/io/translators/bin/win64/mdl_batch.bat
10	HyperStudy Batch	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hst/bin/win64/hstbatch.exe
11	HyperWorks	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hw/bin/win64/hw.exe
12	HV Trans	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/io/result_readers/bin/win64/hvtrans.exe
13	FLUX	Flux	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/.flux/Flux/bin/prg/win64/flux.exe
14	None	None	Internal	C:/Program Files/Altair/2021/hwdesktop/hst/bin/win64/hstsolver_none.bat
15	FluxMotor	FluxMotor	HyperStudy	C:/Program Files/Altair/2025/flux/FluxMotor/Scripts/win/FluxMotors.exe

C:/Program Files/Altair/2025.1/flux/FluxMotor/Scripts/win/FluxMotors.exe

Connection between FluxMotor® and HyperStudy®


1	Open the area in HyperStudy® to register FluxMotor® 2025.1 script
2	Path where FluxMotors.exe must be selected to be registered as a new solver in HyperStudy®. Note: FluxMotors.exe with a "s" at the end of FluxMotors. This must be defined only when using the coupling for the first time. Note: Since the version 2022.1 of HyperStudy, the FluxMotor solver script is automatically registered, when the default path installation is selected while installing Flux and FluxMotor

Note: The new auto generating the HyperStudy Study in HyperStudy Application (described above) allows to automatically register FluxMotor® as a new solver script in HyperStudy®. If HyperStudy is not install in the same folder (by default : C:\Program Files\Altair\2025.1\hwdesktop\hst), the path must be defined in the user preferences via the supervisor of FluxMotor (Path to HyperStudy – Needed for HyperStudy export – Ref. 3 below).

Warning: Mandatory synchronization between connector and FluxMotor versions.

The connectors used in HyperStudy must be synchronized with the FluxMotor solver version.
An error message (inside the log files) is generated while performing HyperStudy studies with a connector provided with a former version of FluxMotor solver.
A connector provided with FluxMotor version N-1 (or older) cannot be used in HyperStudy where the FluxMotor Solver Version N (or newest) is selected.

Since the FluxMotor 2022.3 version, each time a connector is generated, a ConnectorUpdater.py file is provided and located in the same folder as the connector.
Thanks to this script, the user can update an older HyperStudy connector generated with a former version of FluxMotor.
Please refer to the document MotorFactory_Introduction.pdf for additional information in the section dedicated to HyperStudy.

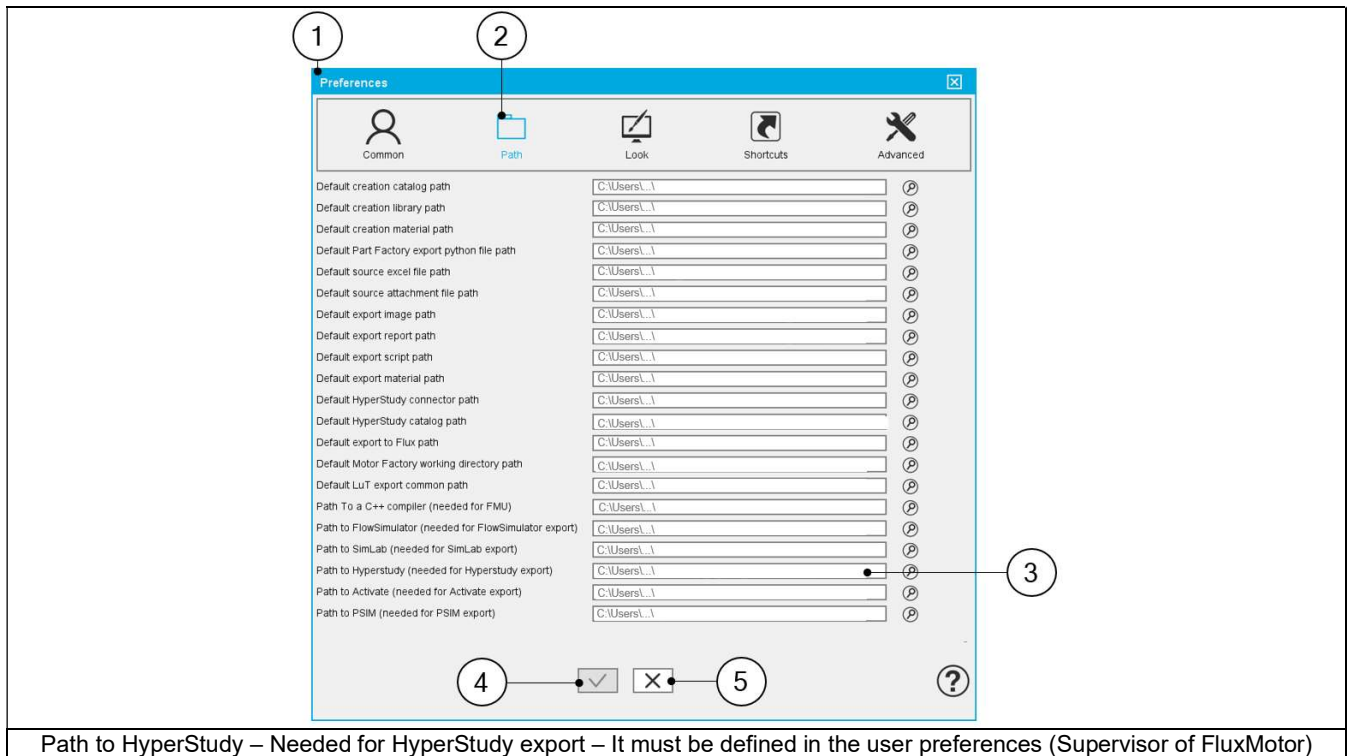

5 BUILD AND EXPORT A MODEL IN ALTAIR® FLUX® 2D ENVIRONMENT

5.1 Overview

The aim of this export is to provide a python file which allows to get a full parametrized model ready to be used in Altair® Flux® 2D environment.

In the current version, models can be exported for static application or transient application in Altair® Flux® 2D environment.

Four models can be exported to Flux® 2D environment:

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model
	Characterization	Open circuit	Motor & Generator	Back emf
	Characterization	Short circuit	Motor & Generator	Three / Two / Single Phase
TRANSIENT	Working point	Sine wave	Motor	If-I-Ψ-N

5.2 Area to build and to export a model to Flux® 2D environment.

Motor Factory – EXPORT AREA – Export model for Flux® 2D environment	
1	Selection of the EXPORT area of Motor Factory.
2	Access the area in which a model for Flux® 2D environment can be made
3	Zone to visualize the overview of the selected model to be exported
4	Click on the tab to select the application (STATIC or TRANSIENT)
5	3 steps to build the model to be exported for Flux® 2D environment
6	Button to validate inputs before building the model in Flux® 2D environment.
7	Exports the python file for building the model in Flux® 2D environment or launch the project directly in Flux® 2D.

5.3 Steps to build and export a model to Flux® 2D environment.

In EXPORT / ADVANCED TOOLS / FLUX2D area, one must indicate that on which application of Flux® 2D environment, the models must be built: static application or transient application.

Then, the 3 next steps are:

- 1) Define the type of scenario one wants to get in Flux® 2D environment (Test selection).
This means the simulation, that one wants to perform in Flux® 2D environment for evaluating the electromagnetic behavior of the considered machine.
- 2) Define the test configuration. This is to give an initial value for the user inputs, which will be set in the scenario of the simulation available in the Flux® 2D model.

Note: For each Flux® 2D model available in the current version, a short description of the user inputs is done in the following sections.

- 3) Define the export information

The resulting models are fully parameterized, and these are built in Flux® 2D environment for static or transient applications.

FLUX 2D ?

Static Transient

1. TEST SELECTION

Characterization

Open circuit - Motor & Generator

Back emf

Short circuit - Motor & Generator

Three / Two / Single phase

Working point

Sine wave - Motor

If-I-Ψ-N

2. TEST CONFIGURATION

3. EXPORT INFORMATION

✓

↺

1

2

3

4

Motor Factory – EXPORT AREA – Export model for Flux® 2D environment

1	Select application (STATIC or TRANSIENT) in which the model must be built in Flux® 2D
2	Choose one scenario (or test) to be provided
3	Define the initial conditions for the simulation process in Flux® 2D environment
4	Define export information

5.4 Test selection

After selecting an application type (STATIC or TRANSIENT), the corresponding test inputs (settings and user inputs) must be defined. This allows to define the initial conditions for testing.

FLUX 2D

StaticTransient

1. TEST SELECTION

Characterization

Open circuit - Motor & Generator

Back emf

Short circuit - Motor & Generator

Three / Two / Single phase

Working point

Sine wave - Motor

I-I-Ψ-N

2. TEST CONFIGURATION

3. EXPORT INFORMATION

✓

↺

1

2

3

4

Motor Factory – EXPORT AREA – Export a model for Flux® 2D – Test selection

1	Selection of application (STATIC or TRANSIENT) in which the model must be built for Flux® 2D
2	Tab to choose one scenario (or test) to be provided
3	Selection of the scenario (or test) to be provided
4	Button to validate the previous choices

Note: The user help information about the test parameters is defined in the user help guide of the corresponding test. Please refer to the corresponding section.

5.5 Test configuration

After selecting an application type (STATIC or TRANSIENT), the corresponding scenario (or test) inputs (settings and user inputs) must be defined. This allows to define the initial conditions for the simulation process in Flux® 2D environment.

FLUX 2D

StaticTransient

1. TEST SELECTION

2. TEST CONFIGURATION

Thermal

INPUTS

Field current (A)12.017

Line current, rms (A)7.54

Control angle (deg)45.0



Speed (rpm)1 500.0

Conductors representationBasic circuit

+

3. EXPORT INFORMATION

✓↺



1

2

3

4

5

2. TEST CONFIGURATION

Thermal

INPUTS

Field current (A)12.017

Line current, rms (A)7.54

Control angle (deg)45.0

Speed (rpm)1 500.0

Conductors representationBasic circuit

No. comp. / elec. period50

No. computed elec. periods2

Rotor initial position (deg)Auto

Mesh order2nd

Airgap mesh coefficient1.5

•

–


Motor Factory – EXPORT AREA – Export a model for Flux® 2D

1	Tab to define the initial conditions for the simulation process in Flux® 2D environment
2	Settings like thermal conditions can be defined
3	User inputs dealing with the considered test can be defined
4	The tab corresponding to advanced parameters can be expanded. Advanced parameters can also be defined if needed.
5	Button to validate the previous choices

5.6 Export information


The last step for building a model for Flux® 2D is to define the export information.
There are three data to be defined:

- The name of the python file which will build the model in Flux® 2D environment.
- The folder in which the provided file must be stored.
- The last answer “Full geometry “allows the user to get a full geometry in the provided model, even if it is possible to work with a reduced model considering the number of poles and the number of slots.

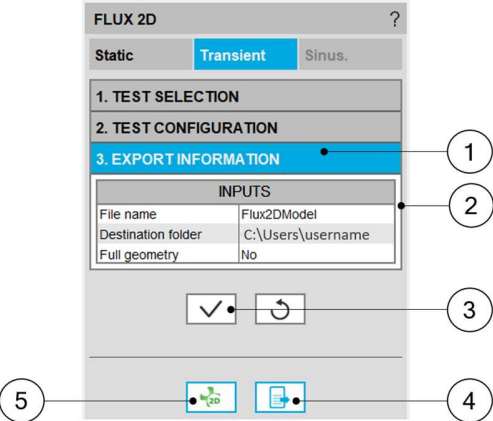

Motor Factory – EXPORT AREA – Export model for Flux® 2D – Export information	
1	Tab to be expanded to define export information for Flux® 2D
2	Area in which the export parameters to be defined are listed
3	Button to validate the previous choices
4	Button to finalize the export of the model. When one clicks on this button, the folder gets opened where the python file to build the model is stored.
5	Button to finalize the export of the model. This button launches Flux® 2D and builds the model.

Note 1: When data is missing in third table; “Export information” for instance, an error message is displayed in the red colored font which indicates what data is missing. If all the needed information is missing, exporting a model is not allowed.

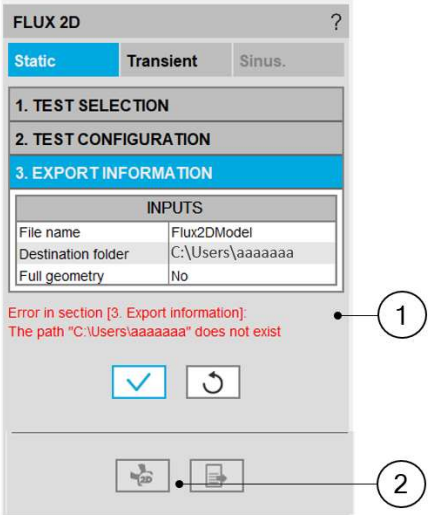

Motor Factory – EXPORT AREA – Export model for Flux® 2D – Error message	
1	Error message displayed in the red colored font
2	The button to export the model is not active if all the needed data are missing

Note: Exporting a model to Flux® 2D (i.e. provide the python file to build the model) can take a few seconds. This is since parameters like initial position of the rotor must be computed first by using internal processes, and then the simulation scenario must be considered.

5.7 Available models to be exported and user inputs.

5.7.1 Overview

All the models to be exported are first classified by considering the type of application for which they are built (STATIC or TRANSIENT). Then, for the tests in Motor Factory Test environment, the models are associated with a convention of operating (Motor or Generator) and grouped into packages itself to get classified into model families.

In the current version of FluxMotor® four models can be exported to Flux® 2D environment:

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model
	Characterization	Open circuit	Motor & Generator	Back emf
TRANSIENT	Characterization	Short circuit	Motor & Generator	Three / Two / Single Phase
	Working point	Sine wave	Motor	If-I-Ψ-N


The following section gives a short description of all the models available for exportation to Altair® Flux® 2D environment.

5.7.2 Without scenario – Current source – Motor and generator – Basic model

5.7.2.1 Positioning and objective

This export allows the users to build a model in Flux® 2D, static application to perform magneto-static and multi-static simulations. User inputs like, field current, line current, and control angle are predefined to get quick access into Flux® 2D environment for performing computations.

The resulting model is fully parameterized, and it is built in Flux® 2D environment, static application.

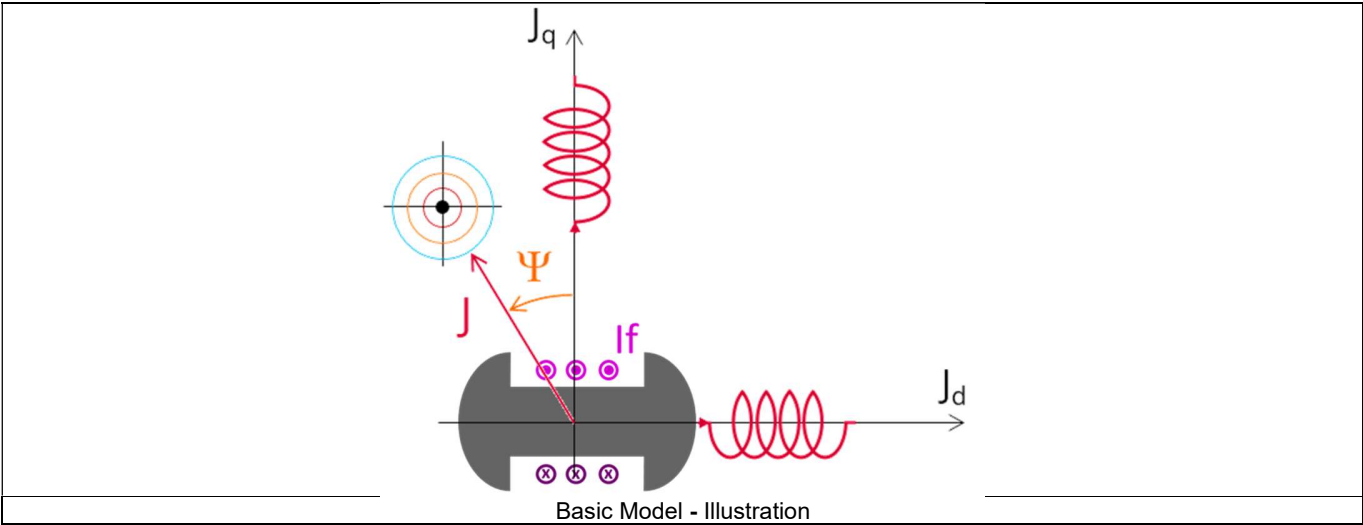

The following section describes all the user inputs to initialize the exported model. All these parameters can be modified in Flux® 2D environment, if needed.

5.7.2.2 Standard inputs

1) Line current, rms

The line current supplied to the machine: **"Line current, rms"** (*Line current, rms value*) must be provided.


2) Field current

The current supplied to the field winding of the machine: **"Field current"** must be provided.

3) Control angle

Considering the vector diagram shown below, the **"Control angle"** is the angle between the electromotive force E and the electrical current (J) ($\Psi = (E, J)$).

It is an electrical angle. The default value is 45 degrees. It must be set in a range of -90 to 90 degrees. This range of values covers all the possible working point in motor convention.

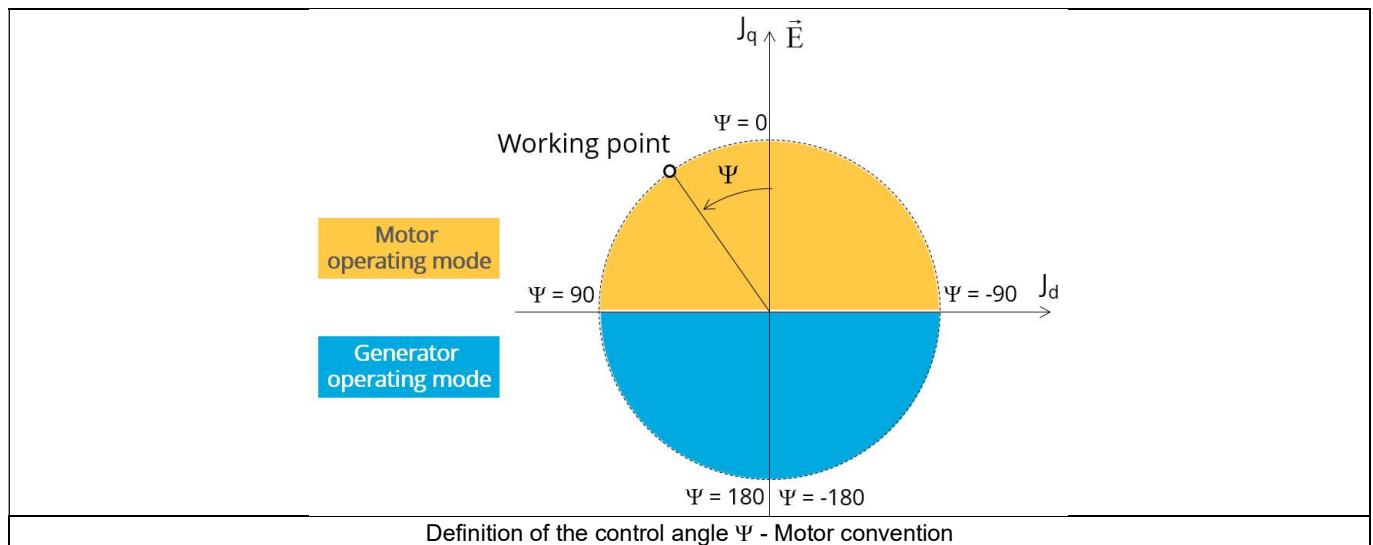

5.7.2.3 Advanced inputs

The list of advanced inputs dedicated to this export are listed below.

For more details, please refer to the section 5.7.6 - List of generic advanced inputs.

1) Rotor initial position mode

By default, the **"Rotor initial position mode"** is set to **"Auto"**.

2) Rotor initial position

3) Mesh order

The default level is second order mesh.

4) Airgap mesh coefficient

Airgap mesh coefficient is set to 1.5 by default.

5.7.3 Characterization – Open circuit – Motor & Generator – Back – emf

5.7.3.1 Positioning and objective

The aim of the test “**Characterization - Open circuit – Motor & Generator - Back-EMF**” is to characterize the behavior of the machine, when running in open circuit state.

The resulting model is fully parameterized, and it is built in Flux® 2D environment, transient application.

The following section describes all the user inputs to initialize the exported model.

All these parameters can be modified in Flux® 2D environment, if needed.

5.7.3.2 Settings

One button gives access to the following setting definition:

- Temperature of active components: winding, damper bars, and end rings

For more details, refer to the section dealing with the test settings.

5.7.3.3 Standard inputs

1) Field current

The current supplied to the field winding of the machine: “**Field current**” must be provided.

2) Speed

The operated speed of the machine to be used in the back-EMF test.

5.7.3.4 Advanced inputs

The list of advanced inputs dedicated to this export are listed below.

For more details, please refer to the section 5.7.6 - List of generic advanced inputs.

1) Number of computations per electrical period

The default value is equal to 50. The minimum allowed value is 13.

2) Number of computed electrical periods

The default value is equal to 2. The minimum allowed value is 1 and the maximum value is equal to 10.

3) Rotor initial position

By default, the “**Rotor initial position**” is set to “**Auto**”.

4) Mesh order

The default level is second order mesh.

5) Airgap mesh coefficient

Airgap mesh coefficient is set to 1.5 by default.

5.7.4 Characterization – Short circuit – Motor & Generator – Three / Two / Single Phase

5.7.4.1 Positioning and objective

The aim of the export **“Characterization - Short circuit – Motor & Generator – Three / Two / Single Phase”** is to characterize the behavior of the machine, when running in short circuit state happening between three phases, two phases or a single phase. The resulting model is fully parameterized, and it is built in Flux® 2D environment, transient application.

The following section describes all the user inputs to initialize the exported model. All these parameters can be modified in Flux® 2D environment, if needed.

5.7.4.2 Settings

One button gives access to the following setting definition:

- Temperature of active components: winding, damper bars, and end rings

For more details, refer to the section dealing with the test settings.

5.7.4.3 Standard inputs

1) Type of short circuit

The type of short circuit can be chosen among a list of choice:

- Three-phase: the three phases of the stator windings are short circuited.
- Two-phase: the first phase and second phase of the stator windings are short circuited.
- Single-phase: the first phase of the stator windings is short circuited.

2) Field voltage

The voltage supplied to the field winding of the machine: **“Field voltage”** must be provided.


3) Speed

The operated speed of the machine to be used in the short circuit test.

4) Short circuit instant

The short circuit instant can cause different behavior of the short circuit transient curve. It can be chosen among a list of choice:

- Instant 0: the linkage flux of the first phase winding is supposed to be maximum.
- Instant 1/4: the linkage flux of the first phase winding is supposed to be zero.
- Instant 1/2: the linkage flux of the first phase winding is supposed to be minus maximum.
- Instant 3/4: the linkage flux of the first phase winding is supposed to be zero.

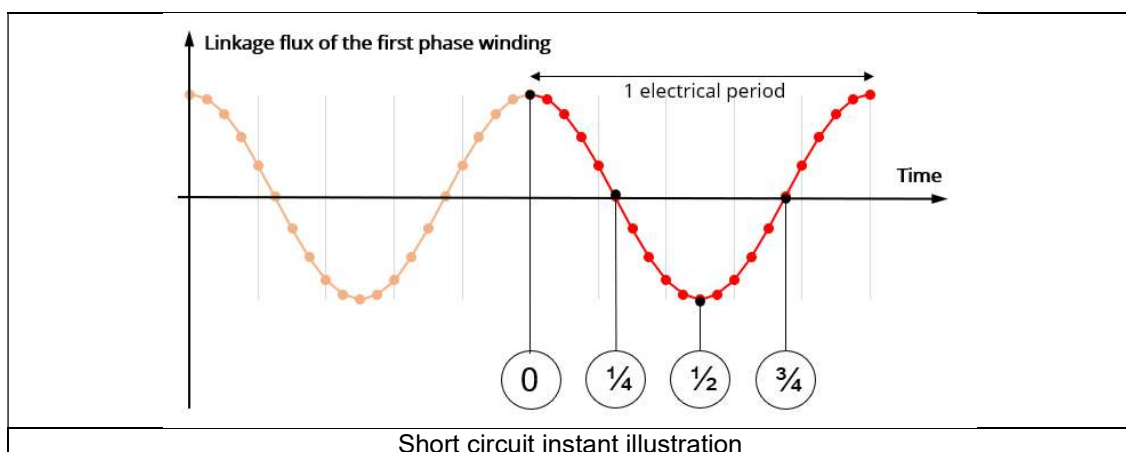

5.7.4.4 Advanced inputs

The list of advanced inputs dedicated to this export are listed below.
For more details, please refer to the section 5.7.6 - List of generic advanced inputs.

- 1) Number of computations per electrical period

The default value is equal to 50. The minimum allowed value is 13.

- 2) Number of electric periods in open circuit

The default value is equal to 1. The minimum allowed value is 0.

- 3) Number of electric periods in short circuit

The default value is equal to 2. The minimum allowed value is 1.

- 4) Rotor initial position

By default, the "**Rotor initial position**" is set to "**Auto**".

- 5) Mesh order

The default level is second order mesh.

- 6) Airgap mesh coefficient


Airgap mesh coefficient is set to 1.5 by default.

5.7.5 Working point – Sine wave – Motor – I_f , I , Ψ , N

5.7.5.1 Positioning and objective

The aim of the test **“Working point – Sine wave – Motor – I_f , I , Ψ , N ”** is to characterize the behavior of the machine when operating at the targeted input values I_f , I , Ψ , N (Magnitude of current, Magnitude of field current, Control angle, Speed). Hence, these three inputs are enough to impose a precise working point.

The resulting model is fully parameterized, and it is built in Flux® 2D environment, transient application.

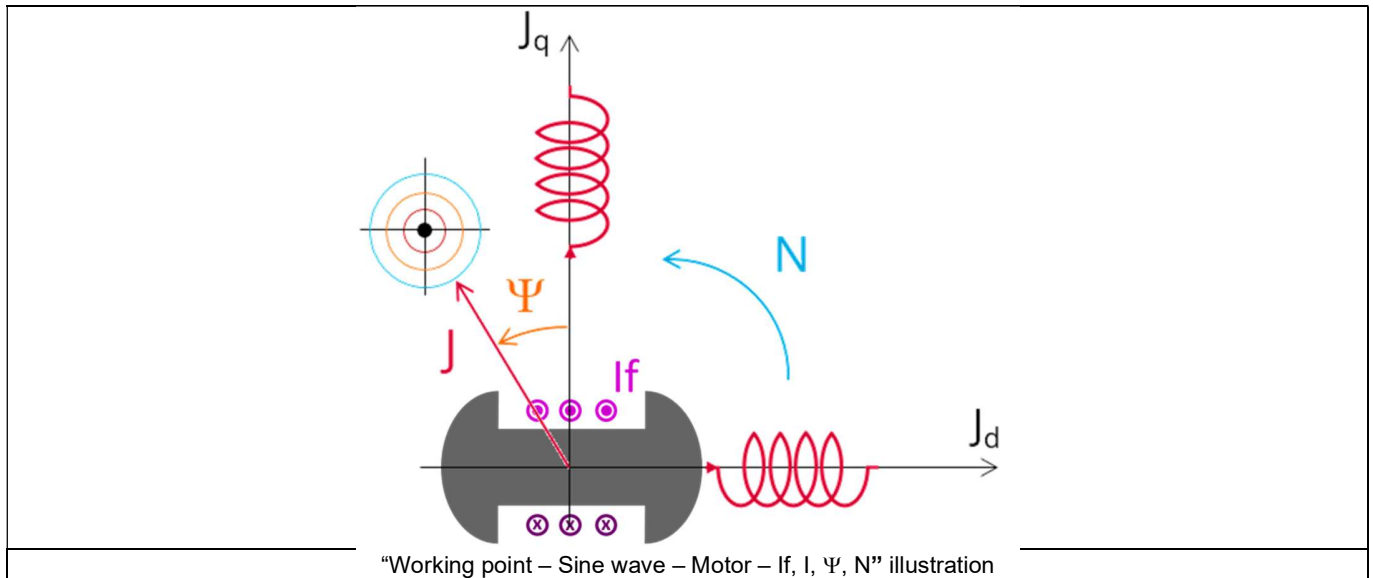

The results of this test give an overview of the electromagnetic analysis of the machine considering its topology. It also gives the capability to make comparisons between results obtained from the measurements and those with the FluxMotor®.

The following section describes all the user inputs to initialize the exported model. All these parameters can be modified in Flux® 2D environment, if needed.

5.7.5.2 Settings

One button gives access to the following setting definition:

- Temperature of active components: winding, damper bars, and end rings

For more details, refer to the section dealing with the test settings.

5.7.5.3 Standard inputs

1) Field current

The current supplied to the field winding of the machine: **"Field current"** must be provided.


2) Line current, rms

The line current supplied to the machine: **"Line current, rms"** (*Line current, rms value*) must be provided.

7) Control angle

Considering the vector diagram shown below, the **"Control angle"** is the angle between the electromotive force E and the electrical current (J) ($\Psi = (E, J)$).

It is an electrical angle. The default value is 45 degrees. It must be set in a range of -90 to 90 degrees. This range of values covers all the possible working point in motor convention.

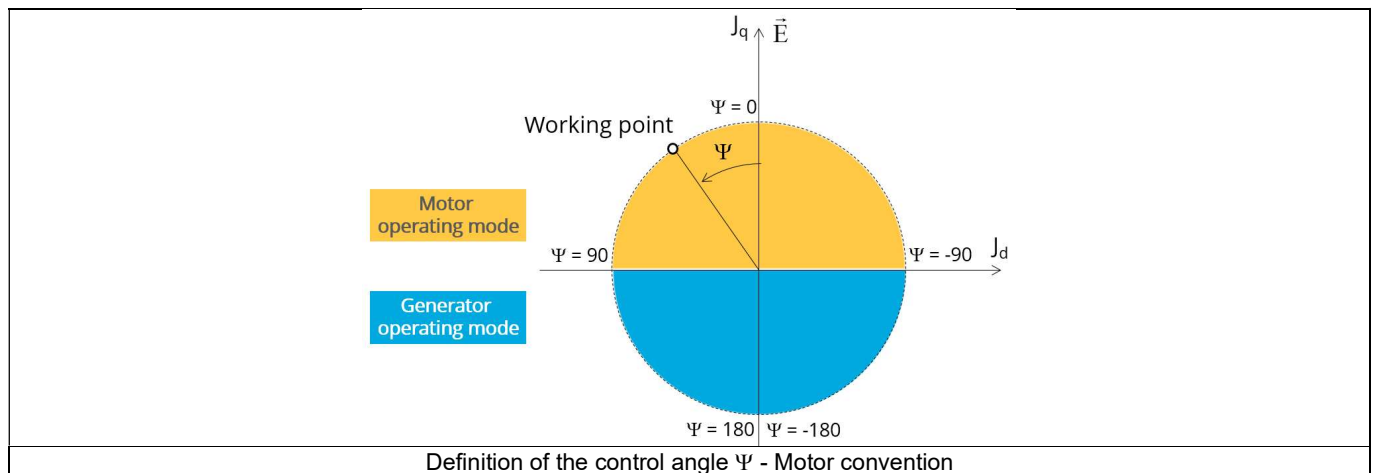

8) Speed

The imposed **"Speed"** (*Speed*) of the machine must be set.

9) Represented coil conductors.

In transient application, it is possible to export a project into Flux® environment, where the elementary wires will be modeled with solid conductors. The geometry, the meshing and the corresponding electric circuit will be defined to well represent these.

Three choices are possible:

- "No": The coils will be represented with face regions. The elementary wires won't be represented in the Finite Element model (Flux®).
- "One phase": The elementary wires will be represented for only one phase. This will allow to compute AC losses for conductors into the first phase. This choice allows to get a good ratio between the quality of results and computation time.
- "All phases": The elementary wires will be represented into all the phases.

5.7.5.4 Advanced inputs

The list of advanced inputs dedicated to this export are listed below.
For more details, please refer to the section 5.7.6 - List of generic advanced inputs.

1) Number of computations per electrical period

The default value is equal to 50. The minimum allowed value is 13.

10) Number of computed electrical periods

The default value is equal to 2. The minimum allowed value is 1 and the maximum value is equal to 10.

11) Rotor initial position

By default, the “**Rotor initial position**” is set to “**Auto**”.

12) Mesh order

The default level is second order mesh.

13) Airgap mesh coefficient

Airgap mesh coefficient is set to 1.5 by default.

5.7.6 List of generic advanced inputs

1) Number of computations per electrical period

The number of computations per electrical period "**No. comp. / elec. period**" (*Number of computations per electrical period*) influences the accuracy of results and the computation time.

The default value is 50. The minimum allowed value is 13. This default value provides a good balance between the accuracy of results and computation time.

2) Number of computed electrical periods

The default value is 2. The minimum allowed value is 1 and the maximum value is equal to 10.

3) Rotor initial position

By default, the "**Rotor initial position**" is set to "**Auto**".

When the "**Rotor initial position mode**" is set to "**Auto**", the initial position of the rotor is automatically defined by an internal process. The resulting relative angular position corresponds to the alignment between the axis of the stator phase 1 (reference phase) and the direct axis of the rotor north pole.

When the "**Rotor initial position**" is set to "User input" (i.e. toggle button on the right), the initial position of the rotor considered for computation must be set by the user in the field « **Rotor initial position** ». The default value is equal to 0. The range of possible values is [-360, 360].

For more details, please refer to the document: MotorFactory_SMWF_IR_3PH_Test_Introduction – section "Rotor and stator relative position".

4) Mesh order

To get the results, the computation is performed using a Finite Element Modeling. The geometry of the machine is meshed.

Two levels of meshing can be considered for this finite element calculation: first order and second order.

This parameter influences the accuracy of results and the computation time.

By default, second order mesh is used.

5) Airgap mesh coefficient

The advanced user input "**Airgap mesh coefficient**" is a coefficient which adjusts the size of mesh elements inside the airgap. When one decreases the value of "**Airgap mesh coefficient**", the size of the mesh elements reduces, thus increasing the mesh density inside the airgap and the accuracy of results.

The imposed Mesh Point (size of mesh elements touching points of the geometry) is described as:

$$\text{Mesh Point} = (\text{airgap}) \times (\text{airgap mesh coefficient})$$

Airgap mesh coefficient is set to 1.5 by default.

The variation range of values for this parameter is [0.05; 2].

0.05 gives a very high mesh density, and 2 gives a very coarse mesh density.

Caution:

Be aware, a very high mesh density does not always mean a better result quality. However, this always leads to a huge number of nodes in the corresponding finite element model. So, it means the need of huge numerical memory, which increase the respective computation time considerably.

6 BUILD AND EXPORT A MODEL IN ALTAIR® FLUX® SKEW ENVIRONMENT

6.1 Overview

The aim of this export is to provide a python file which allows to get a full parametrized model ready to be used in Flux® SKEW environment.

All the models to be exported are first classified by considering the type of application for which they are built (STATIC or TRANSIENT). Then, for the tests in Motor Factory Test environment, the models are associated with a convention of operating (Motor or Generator) and grouped into packages itself to get classified into model families.

In the current version of FluxMotor® three models can be exported to Flux® SKEW environment:

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model
	Characterization	Open circuit	Motor & Generator	Back emf
	Characterization	Short circuit	Motor & Generator	Three / Two / Single Phase
	Working point	Sine wave	Motor	If-I-Ψ-N

The following section gives a short description of all the models available for exportation to Flux® 2D environment.

6.2 Area to build and to export a model to Flux® SKEW environment.

Motor Factory – EXPORT AREA – Export model for Flux® Skew environment

1	Selection of the EXPORT area of Motor Factory.
2	Access to the area in which a model for Flux® Skew environment can be made
3	Zone to visualize the overview of the selected model to be exported
4	Click on the tab to select the application (STATIC or TRANSIENT)
5	3 steps to build the model to be exported for Flux® Skew environment
6	Button to validate inputs and export the python file for building the model in Flux® Skew environment.
7	Buttons to export the python file for building the model in Flux® Skew environment or launch directly Flux® Skew.

6.3 Particularities in building and to exporting a model to Flux® Skew environment.

A user who wants to build and export a model to Flux® SKEW has to follow the same steps and recommendations as with the function “FLUX 2D”.

The main particularity of function “FLUX SKEW” is that the “**Skew number of layers**” is an input, that must be defined. Its default value is 3.

Even if the design of the machine is defined with “continuous skew”, the “**Skew number of layers**” is necessary for Flux® to define the finite elements model in the FLUX SKEW environment. A high number of layers gives more accurate finite elements computations. However, it needs higher computation time. For that purpose, the value 3 is a good compromise between accuracy and speed.

FLUX SKEW

StaticTransient

1. TEST SELECTION

2. TEST CONFIGURATION

Thermal

INPUTS

Speed (rpm)1 500.0

3. EXPORT INFORMATION

✓

↺

FLUX

EXPORT

1

2

3

4

5

2. TEST CONFIGURATION

Thermal

INPUTS

Speed (rpm)	1 500.0
Skew model - No. of layers	3
No. comp. / elec. period	50
No. computed elec. periods	2
Rotor initial position (deg)	Auto
Mesh order	1st
Airgap mesh coefficient	1.5

Motor Factory – EXPORT AREA – Export a model for Flux® SKEW

1	Tab to define the initial conditions for the simulation process in Flux® SKEW environment
2	Settings like thermal and mechanical conditions can be defined
3	User inputs dealing with the considered test can be defined
4	The tab corresponding to advanced parameters can be expanded. Advanced parameters can also be defined, if needed.
5	Button to validate the previous choices

7 EXPORT TO SYSTEM

7.1 Overview

The area SYSTEM, in the EXPORT environment of Motor Factory, allows exporting data like constants, curves and maps in lookup table (LUT) formats, such as FMU and MAT format files.

In the current version, the test Characterization/Model/Maps can be selected for exporting the data.


Constants, curves and maps” given in J_d - J_q plane, for characterizing the 3-Phase synchronous machines with wound field are computed and exported.

These files can be imported directly into environments like Altair® Activate®, Altair® Compose® or Altair® PSIM® as binary variables files (.mat) or inside block functions, ready to be integrated into schemes to represent the model of the corresponding rotating electrical machine.

These functionalities are useful to represent the machine at the system level. Therefore, electrical machine and other system components, such as the drive and the control command, can be represented and simulated altogether into the same area.

Note: This functionality is not implemented for polyphase machines. It will be addressed in a future version.

7.2 Area to export LUT

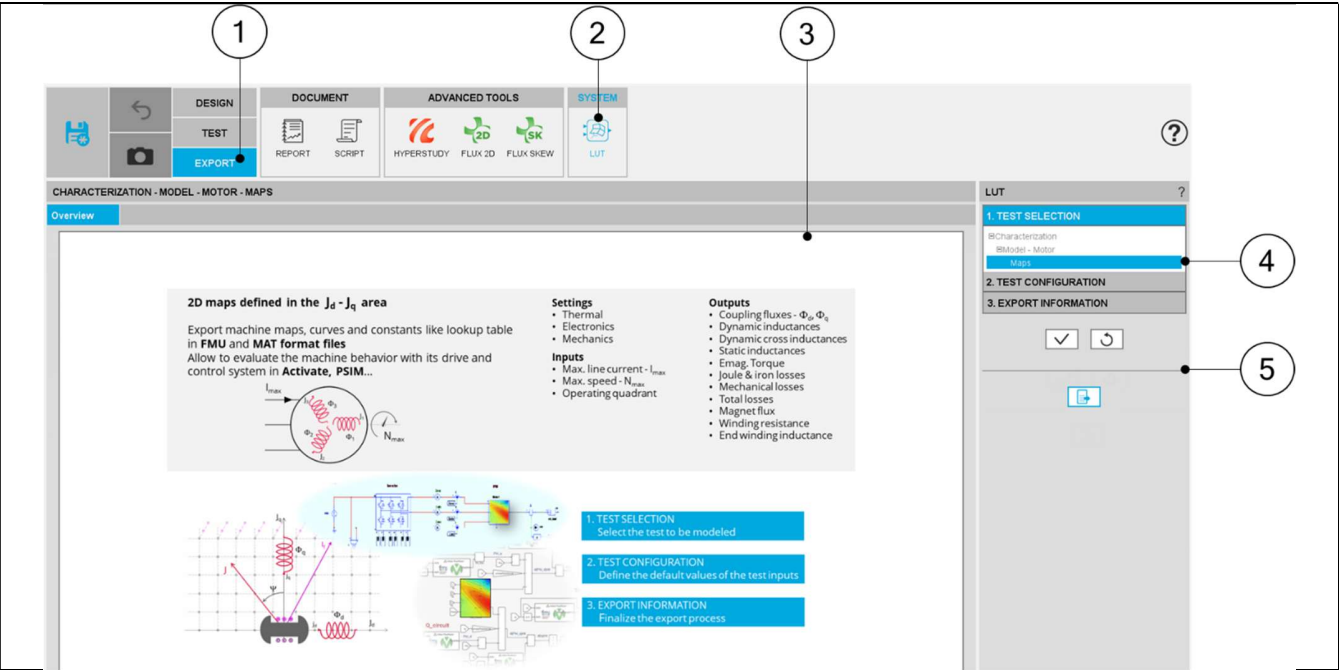

Motor Factory – EXPORT AREA – Export data in LUT formats.

1	Selection of the EXPORT area of Motor Factory.
2	Access the area (SYSTEM) in which data can be exported in lookup table (LUT) formats.
3	Zone to visualize either the overview of the selected test
4	3 steps to compute and to export LUT data
5	Button to validate inputs, display a preview and export the data.

7.3 Steps to build an export LUT

7.3.1 Introduction

In EXPORT / ADVANCED TOOLS / SYSTEM area, 3 steps are needed to build and export data:

- 1) Select the test which will be performed for building data to be exported.
- 2) Define the test configuration, that means the user inputs/outputs parameters needed to perform the test (settings and user inputs of the considered test)
- 3) Define the export type (FMU or MAT formats) and information.

7.3.2 Test selection

In the current version of FluxMotor®, one test can be selected:

- Characterization / Model / Motor / Maps

7.3.3 Test configuration

After selecting a test, the corresponding test inputs (settings and user inputs) must be defined. This allows to define the initial conditions for testing.

1

CHARACTERIZATION - MODEL - MOTOR - MAPS

Overview

2D maps defined in the $J_d - J_q$ area

Export machine maps, curves and constants like lookup table in FMU and MAT format files

Allow to evaluate the machine behavior with its drive and control system in Activate, PSIM...

Settings

- Thermal
- Electronics
- Mechanics

Inputs

- Max. line current - I_{max}
- Max. speed - N_{max}
- Operating quadrant

Outputs

- Coupling fluxes - Φ_d, Φ_q
- Dynamic cross inductances
- Static inductances
- Emag. torque
- Joule & iron losses
- Mechanical losses
- Total losses
- Magnet flux
- Winding resistance
- End winding inductance

3

INPUTS

Operating quadrants	2nd
Max. current dens., rms (A/mm2)	2nd
Maximum speed (rpm)	1st & 2nd
Rotor position dependency	2nd & 3rd
No. computed elec. periods	All

2

LUT

1. TEST SELECTION

2. TEST CONFIGURATION

Thermal

Electronics

Mechanics

Import

INPUTS

Operating quadrants	1st & 2nd
Max. field current density (A/mm2)	5.1
Max. current dens., rms (A/mm2)	6.4
Maximum speed (rpm)	6 000.0
Rotor position dependency	Yes
No. computed elec. periods	1
No. comp. / elec. period	40
No. comp. for Jd, Jq	5
No. comp. for If	6
No. comp. for speed	10
Rotor initial position (deg)	Auto
Mesh order	2nd
Airgap mesh coefficient	1.5

3. EXPORT INFORMATION

4

Motor Factory – EXPORT AREA – SYSTEM – LUT / Test configuration for Characterization / Model / Motor / Maps

1	Overview of the selected test is displayed
2	User inputs can be defined in the test area.
3	User's inputs to export data based on 1, 2 or 4 quadrants
4	User's inputs to export data with respect to the rotor position dependency.

Note: The user help information about the test parameters is defined in the user help guide of the corresponding test. Please refer to the corresponding section.

Note: Operating quadrants
Export / System LUT (Activate or PSIM) allows exporting data based on 1, 2 or 4 quadrants.
This user's input defines the quadrants in the $J_d - J_q$ plane, where the test will be carried out. By default, the only considered quadrant is the 1st & 2nd one (i.e., the grid is defined for negative and positive values of the current in the d axis and positive ones in the q axis). This corresponds to the motor behavior of the machine.

The other possible values for this input are: “2nd and 3rd “, “1st and 2nd “and “all”. Options allow computing and displaying 1, 2 or 4 quadrants.


Note: Rotor position dependency
Export / System LUT (Activate or PSIM) allows exporting data with respect to the rotor position dependency.
This user’s input defines the rotor position dependency, where the test will be carried out. By default, the rotor position dependency is set to “No” but it can be set to “Yes”. In this case the computation will be done in the $J_d - J_q$ plane with an additional fourth axis corresponding to the rotor position θ_r .
In case the rotor dependency is set to “Yes”, whatever the operating quadrant choice, the finite element computation is done over all selected quadrants (in case the rotor dependency is set to “No”, symmetries are used).

7.3.4 Export information

The last step for building and exporting data in FMU format files is to define the export information.

Three inputs must be defined:

- The name of the directory in which the created files will be stored
- The format of the file to be exported. Three options are available: FMU for Activate, FMU generic and MAT file - for Activate and PSIM.
- The destination folder in which the previous directory will be located

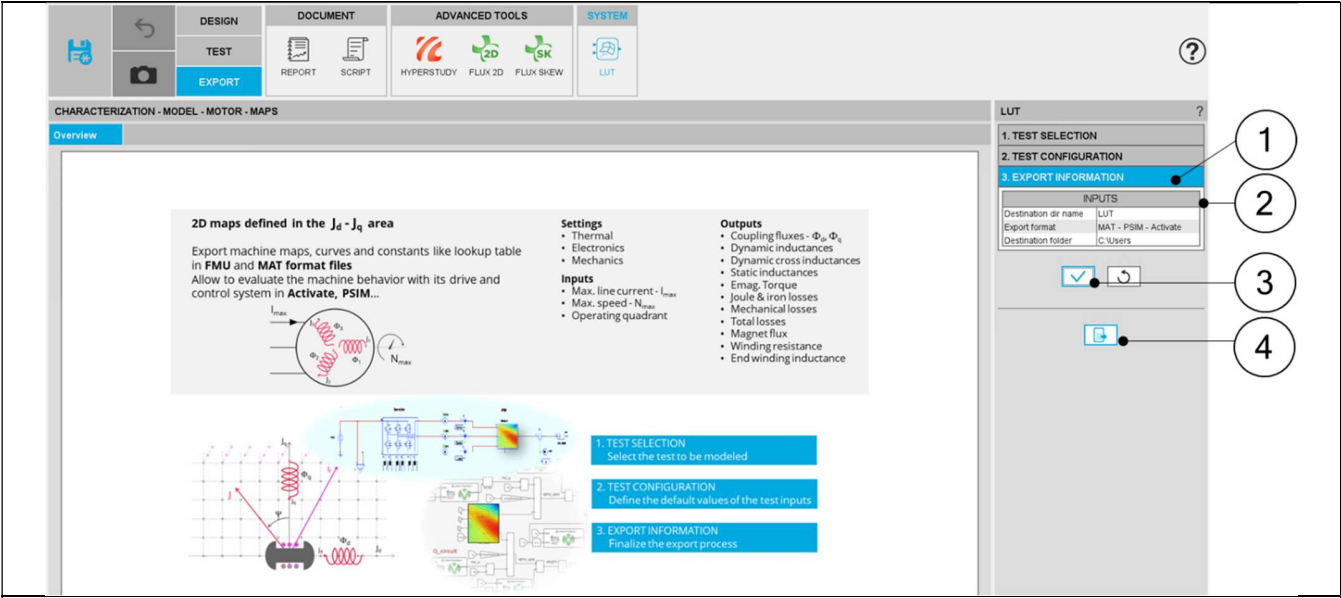

Motor Factory – EXPORT AREA – SYSTEM – LUT / Export information

1	Tab to be expanded to define the export information
2	Area in which the export information of parameters to be defined are listed
3	Button to validate the previous choices
4	Button to finalize the export of the data files. One click opens the folder where the directory is located

7.4 FMU format files

7.4.1 Compatibility

Two packages of FMU format files are automatically provided, one dedicated to Activate® and another one compatible with other system simulation tools.

Hence, the user will be able to select the required system simulation tool without any problem of compatibility. One of the main differences between the two files is how the units are managed in the name labels (See below illustrations).

Exported FMU format files dedicated to Activate®

Exported FMU format files (Generic) compatible with other system simulation tools

7.4.2 A C/C++ compiler is needed

7.4.2.1 C/C++ compiler / System requirements

FluxMotor® requires a C/C++ compiler to perform some operation for creating FMU blocks.

Here is the list of the Visual Studio compilers supported:

- Microsoft® Visual Studio 2019, Community, Professional, Enterprise
- Microsoft® Visual Studio 2017, Community, Professional, Enterprise
- Microsoft® Visual Studio 2019/2017/2015: Build Tools
- Note:** the option for **Windows 10 SDK** must be selected
- Microsoft® Visual Studio C++ 2015 (VC 14.0 Express, Community and Professional)

Important Remark

The table above proposes different versions of Microsoft Visual Studio. Make sure the version you install is approved by your IT department and you have the right license (e.g. if you decide to use Professional Edition, a license is required)

7.4.2.2 Access path of the C/C++ Compiler

Once the C/C++ Compiler is installed on the computer, its access path must be specified in the user's preferences.

Note: When opening FluxMotor®, if a C/C++ Compiler is already installed on the computer, the corresponding install path is automatically written in the user's preferences.

FluxMotor® / Supervisor / User's preferences / Location of the C/C++ Compiler

1	The Preferences dialog box is opened from the FluxMotor® supervisor.
2	Second tab is Path Preferences.
3	Define the location of the C/C++ Compiler on the computer

Here below is a list of files to select in the installation directory (path) according to the Visual Studio version installed:

Visual Studio 2019, Community	C:\Program Files (x86)\Microsoft Visual Studio\2019\Community\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2019, Professional	C:\Program Files (x86)\Microsoft Visual Studio\2019\Professional\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2019, Enterprise	C:\Program Files (x86)\Microsoft Visual Studio\2019\Enterprise\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2017, Community	C:\Program Files (x86)\Microsoft Visual Studio\2017\Community\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2017, Professional	C:\Program Files (x86)\Microsoft Visual Studio\2017\Professional\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2017, Enterprise	C:\Program Files (x86)\Microsoft Visual Studio\2017\Enterprise\VC\Auxiliary\Build\vcvarsall.bat
Microsoft® Visual Studio C++ 2015 Express	C:\Program Files (x86)\Microsoft Visual Studio\14.0\VC\Build\vcvarsall.bat
Microsoft® Visual Studio C++ 2015 Community	C:\Program Files (x86)\Microsoft Visual Studio\14.0\VC\Build\vcvarsall.bat
Microsoft® Visual Studio C++ 2015 Professional	C:\Program Files (x86)\Microsoft Visual Studio\14.0\VC\Build\vcvarsall.bat
Microsoft® Visual Studio 2019, Build Tools	C:\Program Files (x86)\Microsoft Visual Studio\2019\BuildTools\VC\Auxiliary\Build\vcvarsall.bat
Microsoft® Visual Studio 2017, Build Tools	C:\Program Files (x86)\Microsoft Visual Studio\2017\BuildTools\VC\Auxiliary\Build\vcvarsall.bat

Note that the executable command is detected if the Visual Studio is already installed before or if the preference is set to an empty value and then reopening the preference.

7.4.3 Import FMU data in Altair® Activate®


Once FMU files are generated by FluxMotor®, these can be imported in environments like Activate®. This section explains how FMU files generated from FluxMotor® are used in Activate®. The FMU file of the D-axis flux is taken as an example.

First, Activate® is opened.

Either start creating a new project via a new modeling window or open an existing scm file.

To use FMU files from FluxMotor®, locate the FMU block in the palettes of the System library.

- 1) Select View > Palette Browser

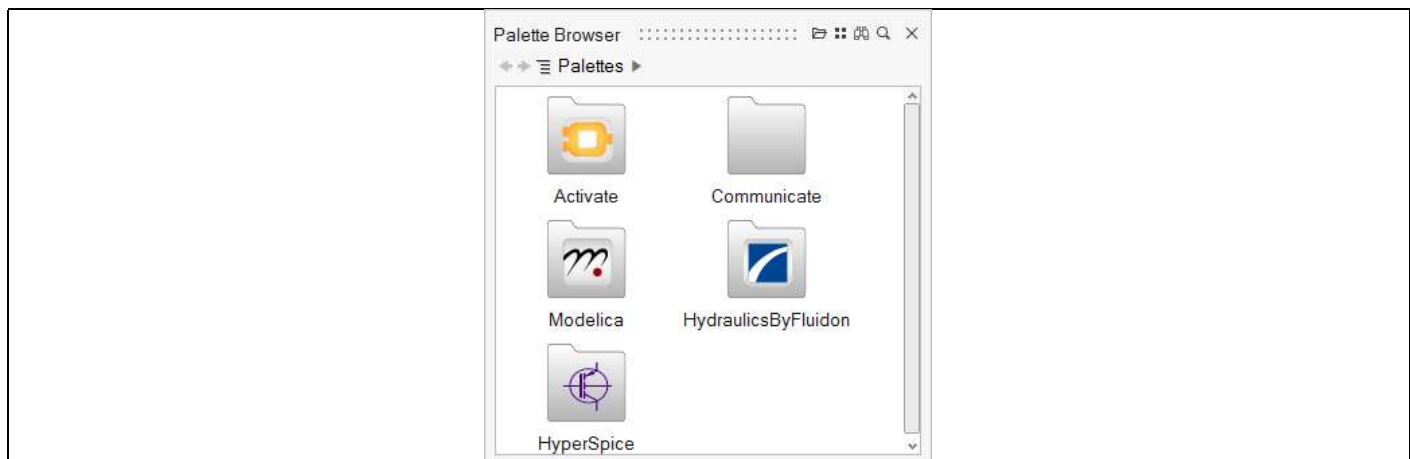


The Palette Browser displays the installed library palettes.

- 2) Double-click Activate® > CoSimulation.
The Palette Browser displays the blocks available in the CoSimulation palette.
- 3) Select the FMU block, then drag and drop it into the modeling window.

One can also write down “FMU” in the quick search field.

- 4) Double-click on the FMU dragged in the modeling window, or right-click, and from the context menu, select Parameters.

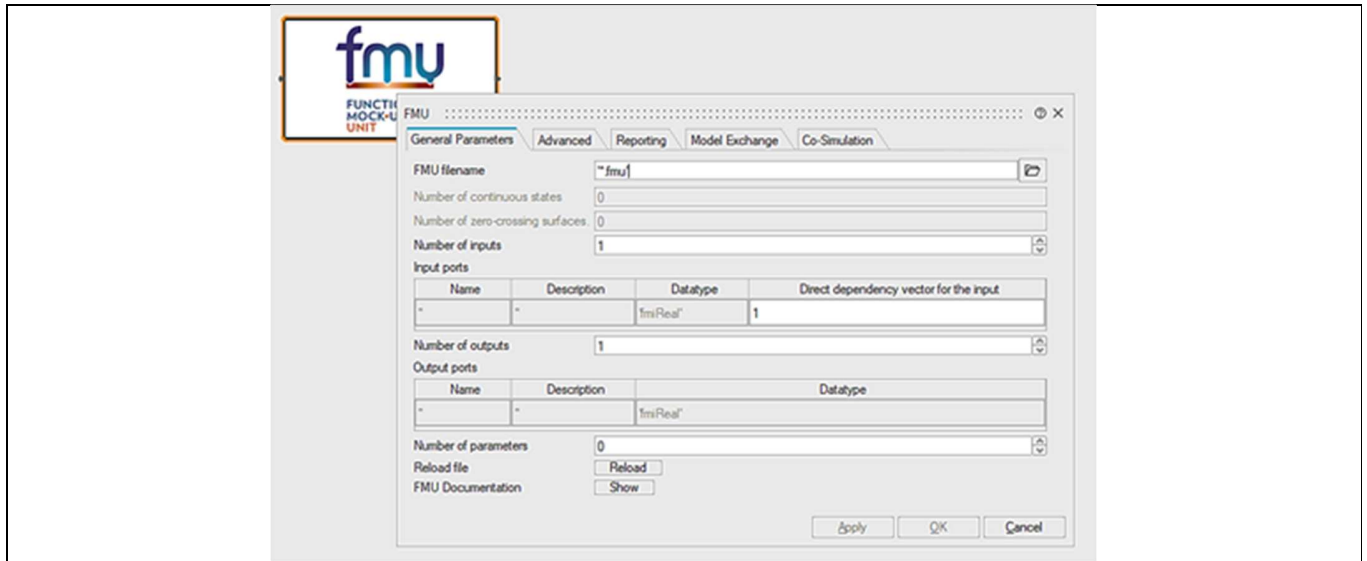


Then:

- In General parameters > FMU filename, indicates the path to the D-axis flux FMU (the directory in which the FMU file is located).
- All the information regarding the D-axis flux FMU appears along with a new content under the name parameters appears. In this area, you can set the boundaries of the quadrant by choosing a value from 0 to 3. These boundaries reflect the FMU response when the user is outside the quadrant in which the calculations were made.

The meaning of each value is listed in the table that follows:

Value	Meaning
0	NAN
1	Zero
2	Hold
3	Linear extrapolation

All the information related to the resolution of the test map can be seen by clicking on the info tab.

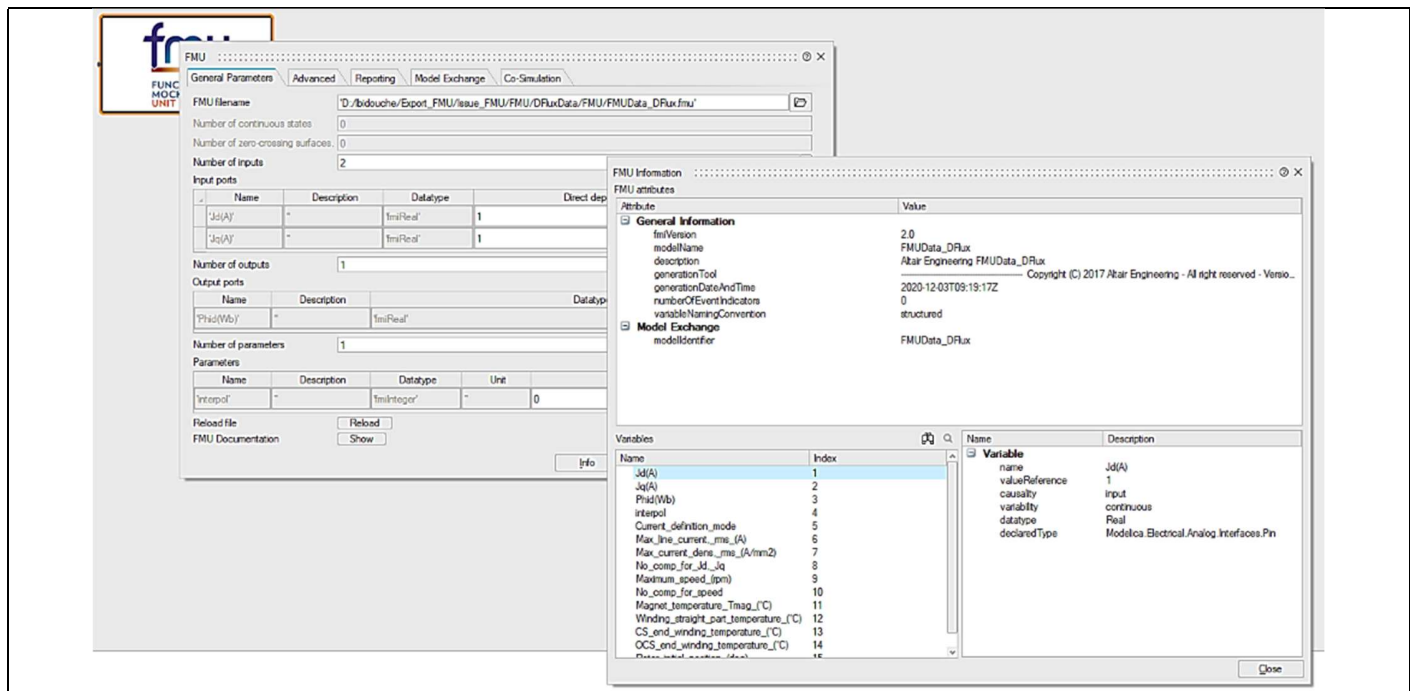

The FMU generated will have its inputs and outputs. The D-axis flux FMU in Activate® will look like this:



Along with FMU files, an oml file, that contains important constant values of the test map is generated. These values can be loaded and used in the Activate® model by executing the oml file.

This oml file could be read in Activate® diagram home by indicating its path, and using the function execution as follow:

```
run('D:\UserFolder\Export_FMU\FMU_AD\oml\constants.oml')
```


7.5 MAT format files

7.5.1 Introduction

Once MAT files are generated by FluxMotor®, they can be imported in environments like PSIM® Activate® or Compose®. This section explains the folder structure and the files generated by the export format “MAT – PSIM – Activate”.

The export generates a folder named according to the user choice. Inside it, two different folders can be found:

- A folder “FMDData”, containing several “.txt” files. Each file stocks the information about one exported variable (e.g., fluxes or inductances):

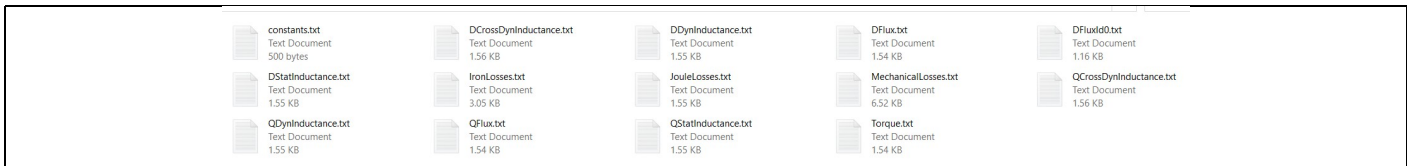

These files have the same format as the results exported from the FluxMotor test Characterization / Model. An example of the file containing the Joule losses is shown below.

```
JouleLosses.txt - Notepad
File Edit Format View Help
#Export_details
#Software_source: AltairFluxMotor
#Version: 2022.2.0
#Motor Name: Nissan_Leaf
#Catalog Name: User_SH_PWM_IR_3Ph
#Family: Synchronous
#Type: Permanent magnet
#Sub-type: Inner rotor
#No. phases: 3.0
#End_export_details

#Table_name=Input_JouleLosses
#Table_format=KeyValue
#Version=1.0
#
#Item_number=12
#
#---General_Parameters---
Current_definition_mode=Current
Max_line_current_rms(A)=+3.000000E+02
Max_current_dens_rms(A/mm2)=+7.000000E+00
No_comp_for_Id_Idq=+5.000000E+00
Maximum_speed(rpm)=+5.000000E+03
No_comp_for_speed=+5.000000E+00
Thermal_solving=No
Winding_straight_part_temperature(°C)=+1.000000E+02
CS_end_winding_temperature(°C)=+1.000000E+02
OCs_end_winding_temperature(°C)=+1.000000E+02
Magnet_temperature_Tmag(°C)=+1.500000E+02
Rotor_initial_position(deg)=+4.500000E+01

#Table_name=FNUData_JouleLosses
#Table_format=2D
#Version=1.0
#
#Item_number=1
#Axis_number=2
#
#Axis_name_1=Id(A)
#Axis_name_2=Iq(A)
#
#Axis_unit_1=A
#Axis_unit_2=A
#
#Item_name_1=JouleLosses(W)
#
#Item_unit_1=W
#
#
#
#
-4.242641E+02 -3.181981E+02 -2.121320E+02 -1.060660E+02 +0.000000E+00
+0.000000E+00 +1.060660E+02 -2.121320E+02 +3.181981E+02 +4.242641E+02
+3.640349E+03 +2.047696E+03 +9.100871E+02 +2.275218E+02 +0.000000E+00
+3.067870E+03 +2.275218E+03 +1.137609E+03 +4.550436E+02 +2.275218E+02
+4.550436E+03 +2.957783E+03 +1.830174E+03 +1.137609E+03 +9.100871E+02
+5.688045E+03 +4.095392E+03 +2.957783E+03 +2.275218E+03 +2.047696E+03
+7.280697E+03 +5.688045E+03 +4.550436E+03 +3.067870E+03 +3.640349E+03
```

- A folder MAT_PSIM stocking the MAT file. It is written in version 5.0 and can be read by any software supporting this format. Here, it can be seen that the variables contained by this file are read by Compose®.

Command History		Variable Browser		Session Information	
Name	Value	Type	Scope		
ANGPOS_ROTOR_DEG	45	number	Base		
AXIS_MAGNET_TEMP	150	number	Base		
Catalog_Name	User_SM_PM_IR_3Ph	string	Base		
FLUX_D	<matrix(1x25)>	matrix	Base		
FLUX_ID0	[0.0671220325 0.0676971718 0.0632808409 ...	matrix	Base		
FLUX_Q	<matrix(1x25)>	matrix	Base		
Family	Synchronous	string	Base		
ID_PEAK	[-424.264068711929 -318.198051533946 -21...	matrix	Base		
IQ_PEAK	[0 106.066017177982 212.132034355964 318...	matrix	Base		
J_inertia	0.0299335738386677	number	Base		
LD_DYN_vs_ID	<matrix(1x25)>	matrix	Base		
LD_DYN_vs_IQ	<matrix(1x25)>	matrix	Base		
LD_STAT_vs_ID	<matrix(1x25)>	matrix	Base		
LD_STAT_vs_IQ	<matrix(1x25)>	matrix	Base		
LOSS_IRON	<matrix(1x125)>	matrix	Base		
LOSS_JOULE	<matrix(1x25)>	matrix	Base		
LOSS_MECHANICAL	<matrix(1x200)>	matrix	Base		
LQ_DYN_vs_ID	<matrix(1x25)>	matrix	Base		
LQ_DYN_vs_IQ	<matrix(1x25)>	matrix	Base		
LQ_STAT_vs_ID	<matrix(1x25)>	matrix	Base		
LQ_STAT_vs_IQ	<matrix(1x25)>	matrix	Base		
L_end_winding	1.11642517844301e-05	number	Base		
Motor_Name	Nissan_Leaf	string	Base		
No_phases	3.0	string	Base		
Phi_M	0.0671220325	number	Base		
R_phase	0.0154984181044671	number	Base		
SPEED_RPM	[1200 2400 3600 4800 6000]	matrix	Base		
Software_source	AltairFluxMotor	string	Base		
Sub_type	Inner rotor	string	Base		
TEST_CURRENT_DEFINITION_MO_	CURRENT	string	Base		
TEST_CURRENT_DENSITY_RMS	7	number	Base		
TEST_CURRENT_LINE_RMS	300	number	Base		
TEST_MAXIMUM_SPEED	6000	number	Base		
TEST_NO_COMPTUTATIONS_FOR_	5	number	Base		
TEST_NO_COMPTUTATIONS_FOR_	5	number	Base		
THERMAL_MAGNET_SOLVING_MO_	MAGNET_CONSTANT_TEMPERATURE	string	Base		
TORQUE	<matrix(1x25)>	matrix	Base		
T_ACTIVE_LENGTH_WINDING_C	100	number	Base		
T_CS_END_WINDING_C	100	number	Base		
T_MAGNET_C	150	number	Base		
T_OCS_END_WINDING_C	100	number	Base		
Type	Permanent magnet	string	Base		
Version	2022.2.0	string	Base		
initial_angle_rotor_deg	45	number	Base		
num_pole_pairs	4	number	Base		