

# Altair Safety Report Manager

## Table of Contents

### Table of Contents

Altair Safety ReportManager .....	1
ASRM GUI Overview .....	4
Modules .....	9
Animation.....	10
Animation New .....	11
Barrier Face Overlap .....	13
Battery Section Force .....	15
BOM .....	17
Collision Detection .....	18
Contour Plot.....	20
Deformed Shape .....	22
Displacement Plot.....	24
Door Aperture Deformation .....	25
Energy Distribution.....	26
Exploded View .....	27
Fuel Tank Interaction.....	28
Fuel Tank Zone X Assessment .....	29
Fuel Tank Zone Y Assessment .....	30
Load Path .....	31
Measure Plot .....	33
Occupant .....	35
Euro NCAP FAR Side Occupant Assessment.....	39
Plastic Strain .....	43
Run Statistics .....	44
Structural Intrusions.....	46
User Defined Output.....	50
Vehicle Yaw Pitch Roll.....	51
Velocity Separation .....	53
Weld Failure.....	54

## Altair Safety Report Manager

The Altair Safety Report Manager (aka ASRM) is a fully customizable automatic report generation utility for crash & safety regulations. It allows users to create a First Sight Report PPT for the selected impact type & regulation. The PPT report which consists of plots & animations that are generated based on various inputs entered by the user.

A standard report is delivered for each mode with the following info and contents.


- Model information
- Run quality statistics
- Occupant requirements
- Structure requirements
- Structure overview
- User defined plots

In addition, HyperView template & session files are created at the end of report generation which contains all plots/animations for closer analysis. It has the capability to overlay plots from different iterations. It is also possible to overlay plots with test data in HyperView.

The ASRM utility can also be run on HPC after job completion.

## ASRM GUI Overview

Below is a snapshot of the ASRM GUI. To understand the ASRM workflow better, the GUI is divided into various sections as highlighted & numbered in the below picture. The main functionality of all the sections is briefly described below.

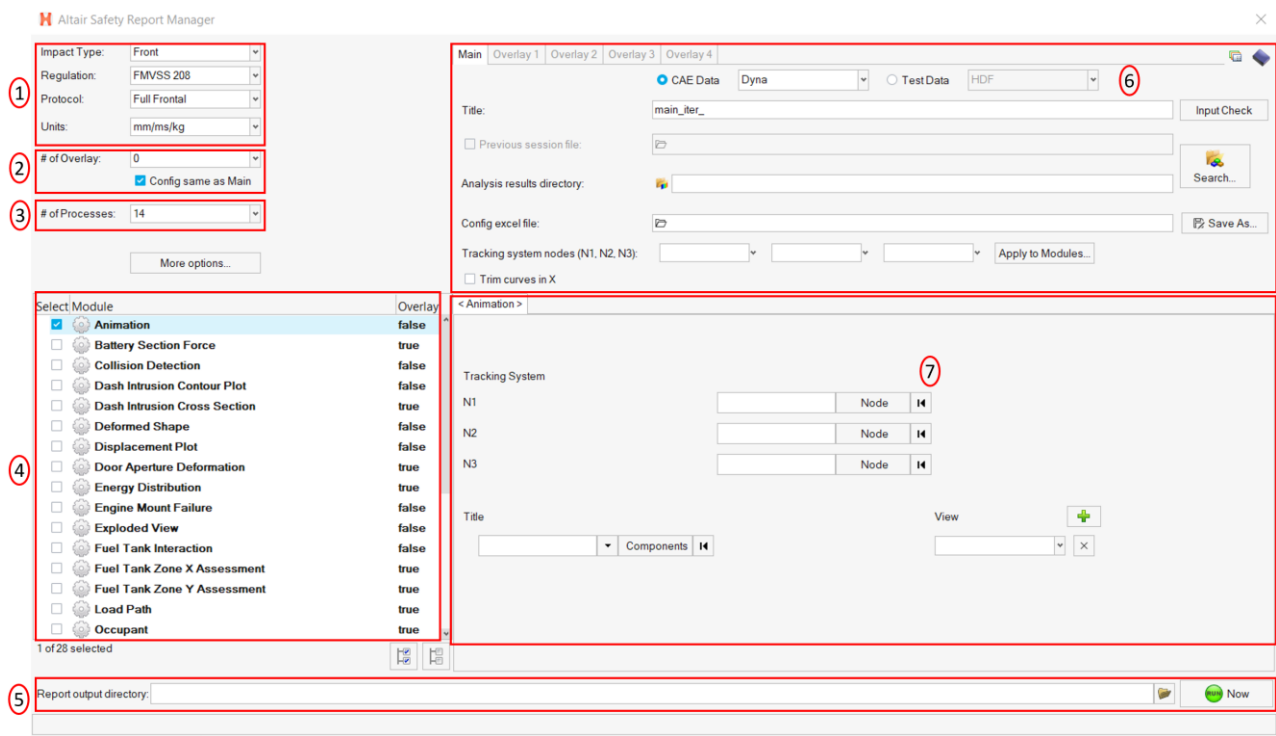

### Impact Type & Units selection Section


In this section, user will be able to select the Impact Type, Regulation, and the Protocol for which he / she wants to generate the PPT report. Based on this selection the modules list (section #4) gets updated.

Impact Type:	Front
Regulation:	FMVSS 208
Protocol:	Full Frontal
Units:	mm/ms/kg

### Overlay selection section

In this section user will be able to select the overlay option. Following scenarios are supported.

- When you want to generate report for a single run then you would set overlay option to 0. Therefore, overlay tabs (in section #6) is disabled.



- When you want to run in overlay mode, then you must pick appropriate number of overlay runs. The overlay tabs get enabled based on the number selected. User can select up to 4 iterations for overlay.




Please note that only those modules which run in HyperGraph (that create curves / graphs) are supported for overlay mode. There is a specific overlay status column next to modules list that indicates the overlay support for each module.

## No. of Processes selection & save session file section

This section allows user to enter the no. of processes to be used when executing the utility. ASRM has the capability to run the report generation in parallel based on the no. of processes selected.

It also saves TPL files and session files at the end of the report generation. Users can also choose to export curves (curves created from the respective plotting modules) into **Excel** format. Click on the **More options...** button to select these options.



## Modules list

This section allows users to select the modules to be run for report generation. User must make sure to select the module that he / she wants to include in the report generation.

## Output directory selection

In this section user will select the output directory path. This is where all the output files such as the session files, images, animations, PPT & log files from the ASRM run will be created.


## Main section

### Input directory, data type & configuration section

In this section, user will be able to select the following.


- Type of data being used for generating the report. It could be CAE simulation data or physical test data.
- Title for the report which will be used for creating results directory as well as prefix for curve names & summary tables
- Results directory path where the solver input file, results files such as animation & time history files or test data are located.

- Config file path (if it exists already)
- Define global tracking system using 3 nodes (requests from Time history file). This is an optional input. Once the global tracking system is defined, it can be easily applied to other modules where tracking system is an input. Click on **Apply to Modules...** button, a selection dialog pops up, select the modules to apply the 3 nodes, and click **Apply&Close** button.

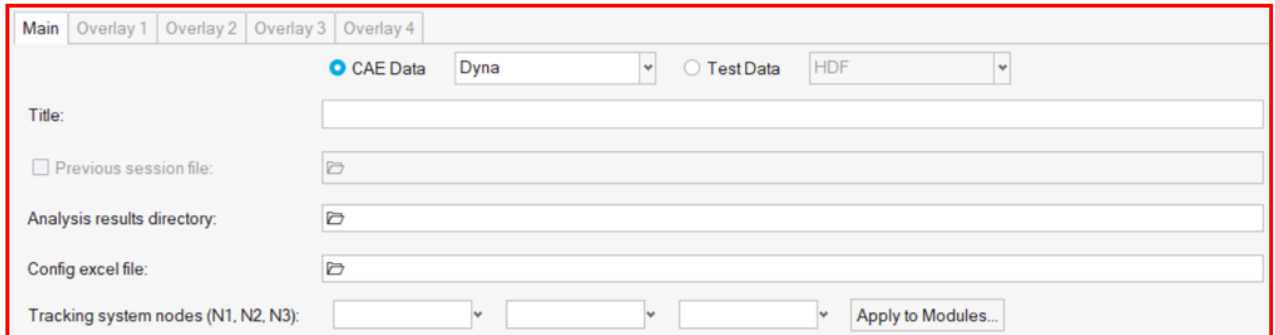

### Input Validation check

Input Check button would run a quick validation check to verify if the inputs defined for various modules selected is valid. The verification is done on the results files available in the input directory specified. Any invalid inputs and missing input found from validation check will be highlighted in RED in the ASRM GUI as shown below.

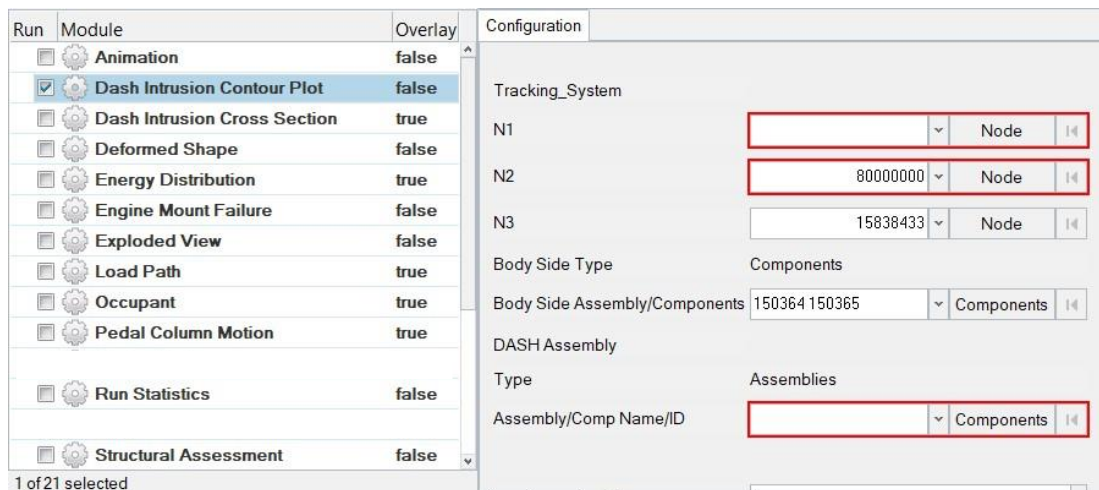


Run	Module	Overlay
<input type="checkbox"/>	Animation	false
<input checked="" type="checkbox"/>	Dash Intrusion Contour Plot	false
<input type="checkbox"/>	Dash Intrusion Cross Section	true
<input type="checkbox"/>	Deformed Shape	false
<input type="checkbox"/>	Energy Distribution	true
<input type="checkbox"/>	Engine Mount Failure	false
<input type="checkbox"/>	Exploded View	false
<input type="checkbox"/>	Load Path	true
<input type="checkbox"/>	Occupant	true
<input type="checkbox"/>	Pedal Column Motion	true
<input type="checkbox"/>	Run Statistics	false
<input type="checkbox"/>	Structural Assessment	false


1 of 21 selected

Configuration	
Tracking_System	
N1	[Node] [14]
N2	[80000000] [Node] [14]
N3	[15838433] [Node] [14]
Body Side Type	Components
Body Side Assembly/Components	[150364 150365] [Components] [14]
DASH Assembly	
Type	Assemblies
Assembly/Comp Name/ID	[Components] [14]

### Search function


Search button will let users to select and import the 2D time history file (CAE (T01 / binout) or physical test data (HDF / ISO MME)) as well as main solver input file into the current session. This is required for defining the inputs for all the modules. An additional dialog called **files to load** will be displayed to select the files as shown below.




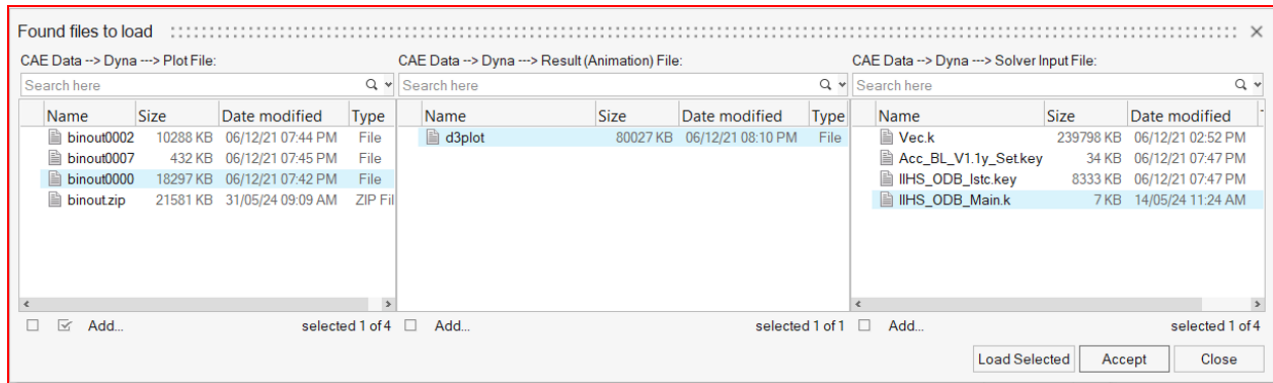


## Change curve attributes & publish session

This section is mainly used for the overlay scenario.

The change curve attributes option  brings up an overlay setting dialog as shown below. This will allow to change various curve & note related attributes for the overlay session per layer basis.

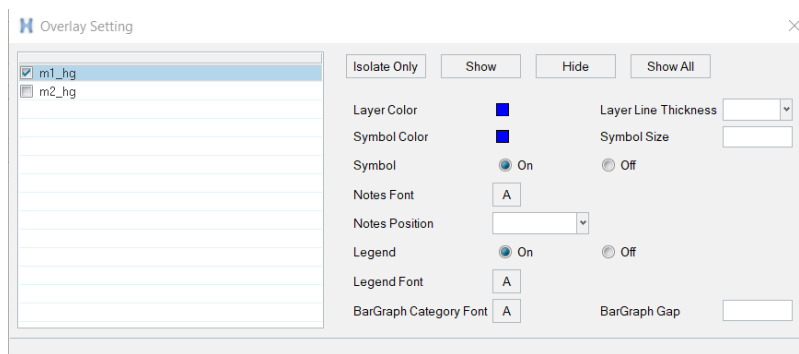


After changing the curve & note related attributes using the overlay setting dialog, user can click on Publish session icon  which would publish a report for the overlay session.

## Configuration section

This is the section wherein the inputs required for all the modules will be entered & displayed. For defining the inputs, firstly make sure to load both the 3D (solver input file) file as well as Time History file using the Load button. Then start defining the inputs for the modules.

FE entities such as nodes, components or assemblies can be selected from graphics screen from the loaded solver input file.

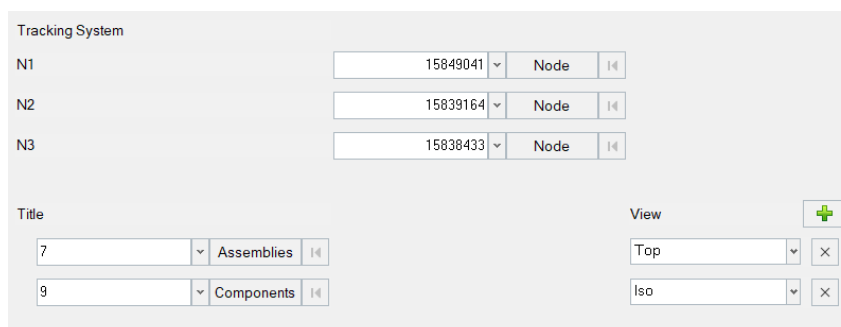

Occupant >

Driver Passenger

Dummy Model 50th Dummy Version config Reset

injury Driver Restraint Type

Driver ID

Driver Injury Criteria	Subcase	Datatype	Request	Component	Filter
HEAD_ACC_X	abstet		H350TH_DUMMY+1_HEAD_ACCELEROMETER_X_200001		
HEAD_ACC_Y	abstet_cpm		H350TH_DUMMY+1_HEAD_ACCELEROMETER_Y_200002		
HEAD_ACC_Z	deltac		H350TH_DUMMY+1_HEAD_ACCELEROMETER_Z_200003		
HEAD_ACC_RES	deltacout		H350TH_DUMMY+1_CHEST_ACCELEROMETER_X_200004		
	glsat		H350TH_DUMMY+1_CHEST_ACCELEROMETER_Y_200005		
NECK_UPPER_MOMENT_Y	yflor		H350TH_DUMMY+1_CHEST_ACCELEROMETER_Z_200006		
	matlum		H350TH_DUMMY+1_PELVIS_ACCELEROMETER_X_200007		
NECK_UPPER_FORCE_X	onload		H350TH_DUMMY+1_PELVIS_ACCELEROMETER_Y_200008		
NECK_UPPER_FORCE_Z					
CHEST_DEFLECTION					
CHEST_ACC_X					
CHEST_ACC_Y					
CHEST_ACC_Z					


## Modules

Following is the list of modules supported by ASRM utility for side impact type.

- Animation
- Animation New
- Barrier Face Overlap
- Battery Section Force
- Collision Detection
- Contour Plot
- Deformed Shape
- Displacement Plot
- Door Aperture Deformation
- Energy Distribution
- Exploded View
- Fuel Tank Interaction
- Fuel Tank Zone X Assessment
- Fuel Tank Zone Y Assessment
- Load Path
- Measure Plot
- Occupant
- Plastic Strain
- Run Statistics
- Structural Intrusions
- User Defined Outputs
- Vehicle Yaw Pitch Roll
- Velocity Separation
- Weld Failure

## Animation

Animation module lets you create gif animations of the selected parts (or assemblies) in the user selected standard views.

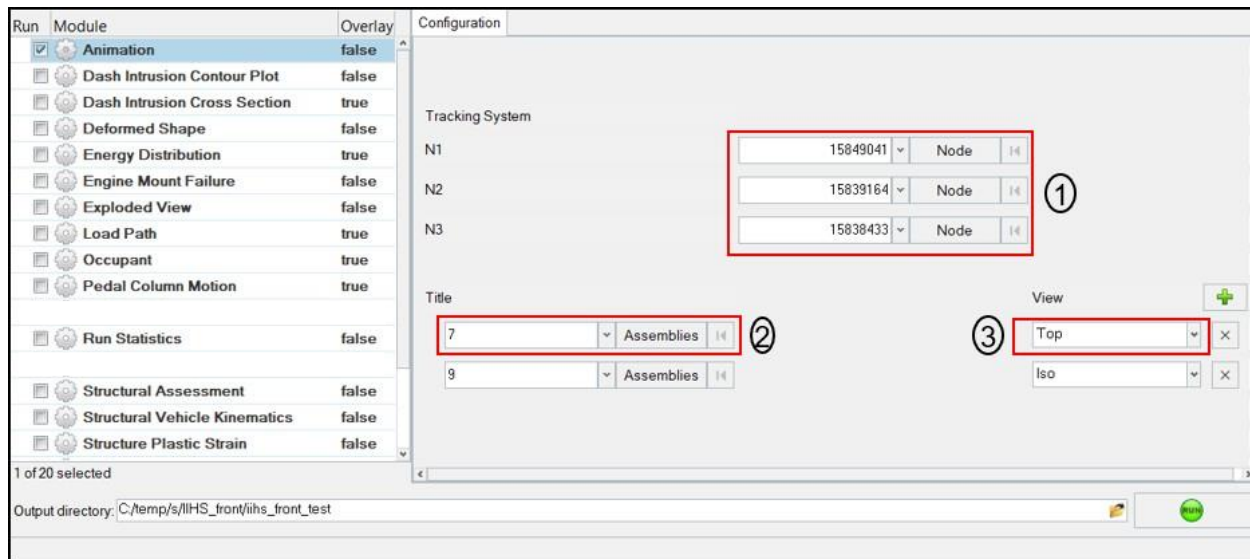


### Inputs:

- 1) Node ID 1, 2 & 3 for defining tracking system
- 2) Part ID or Assembly ID to be used when capturing gif animations
- 3) One of the standard views to be used when capturing the gif animations for the part or assy ID selected in step #2


### Output report:

#### Animation Iso View ③

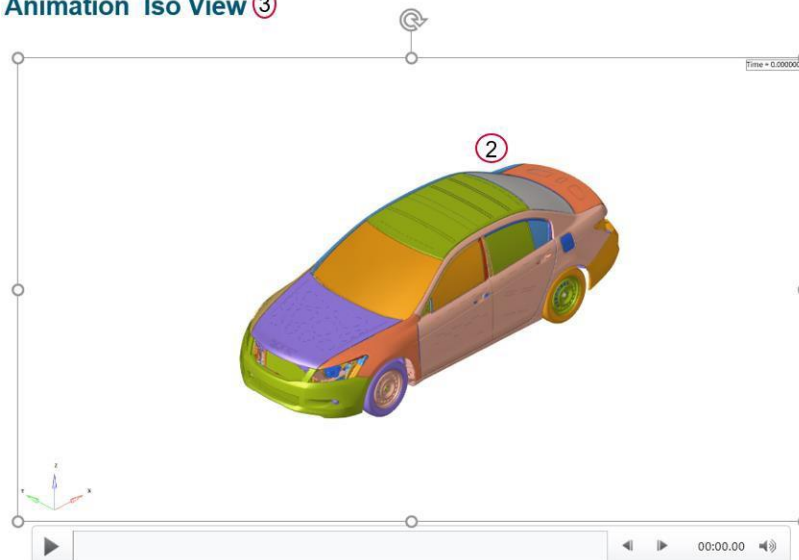




## Animation New

This module lets you capture animation of the selected parts (or assemblies) and offers flexibility in terms of page layout, view orientation, tracking and section cut. The GUI and the various inputs that are required to be defined are mentioned below.

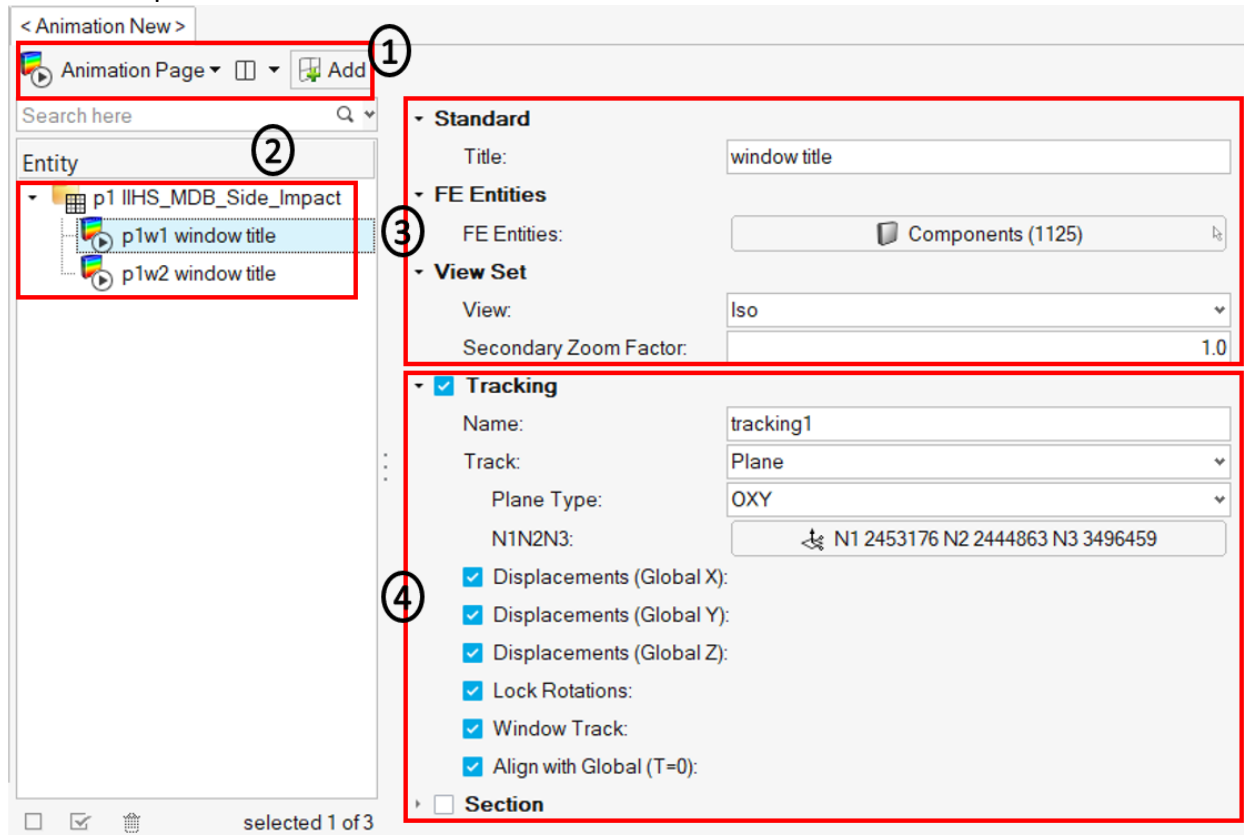


### Inputs:

- 1) Use this input to select the page & window layout that will be captured and included in the report. 2 layouts are supported i.e. 1 x 1 and 1 x 2. Select the layout and click on **Add** button to add the page layout into the entity list browser.
- 2) The **Entity** list browser is used to list and manage the pages included by the user and their respective layouts.
- 3) Enter the **Title** used for the slide title in the report, select the **Components** to be used for the current page and the **View Set** to be used to orient the components.
- 4) Define **Tracking system** & **Section cut** details along with its attributes to be applied while generating the report.

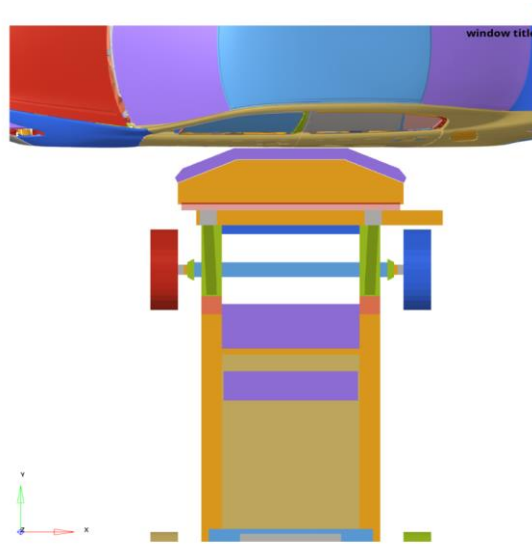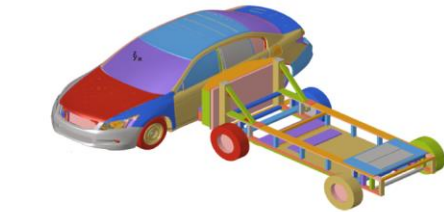


## Barrier Face Overlay

Barrier Face module lets you create an image of the MDB Barrier Face, and the vehicle as shown below. This will help visualize how the barrier is positioned relative to the vehicle parts such as upper body & occupants so that any deviation or offset can be easily found out.

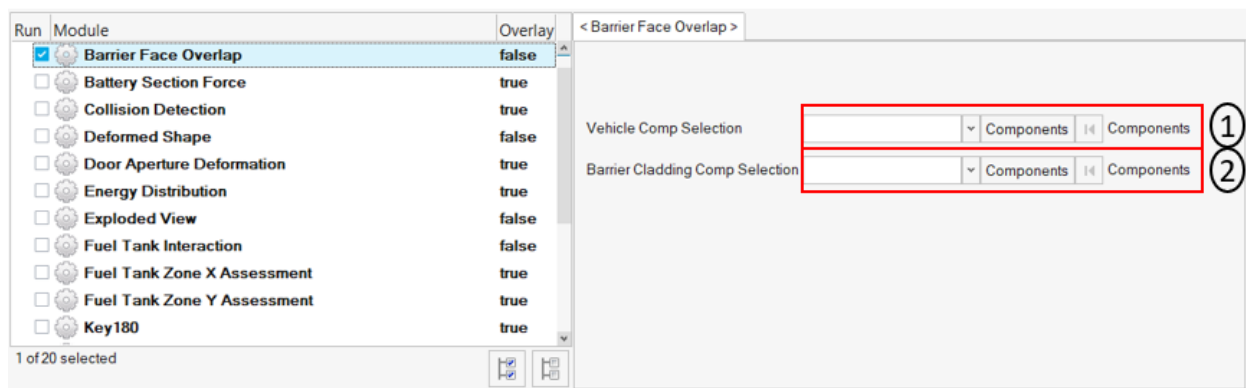

### Inputs:


- 1) Vehicle component selection. This includes all the vehicle parts such as upper body, occupants, door beams etc. They are displayed in grey, transparent color.
- 2) Barrier cladding components selection. This includes the front cladding parts on the barrier. A component set is created for the selected cladding parts & displayed as shown in the image.

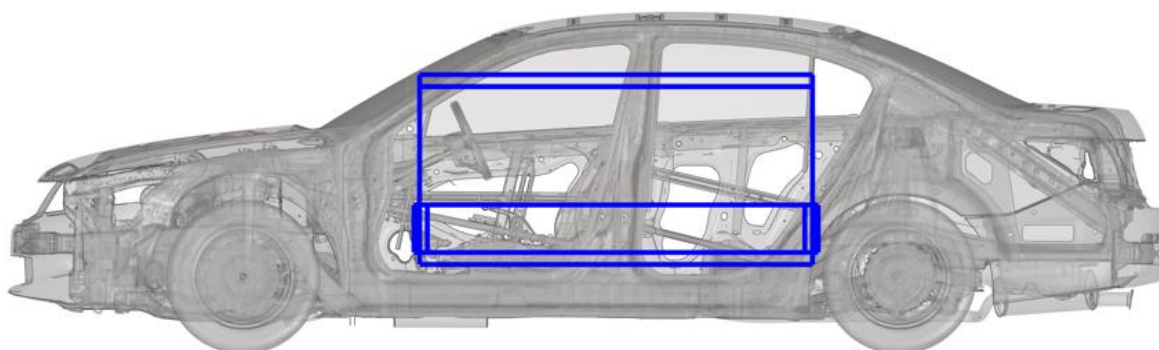**Output report:**

## Battery Section Force

Battery Section Force module lets you create a summary report of battery and floor cross member section forces and battery intrusion measurements. The report consists of following.



- 1) Images consisting of floor and the battery parts along with cross section members
- 2) A summary table showing the cross-member forces for all the user defined battery & floor sections
- 3) A summary table showing the battery intrusion measurements at various user selected locations
- 4) Images of the plots showing the battery & floor section forces along with the total floor & battery crossmember forces. Battery intrusion plots are also created at all the user selected locations.

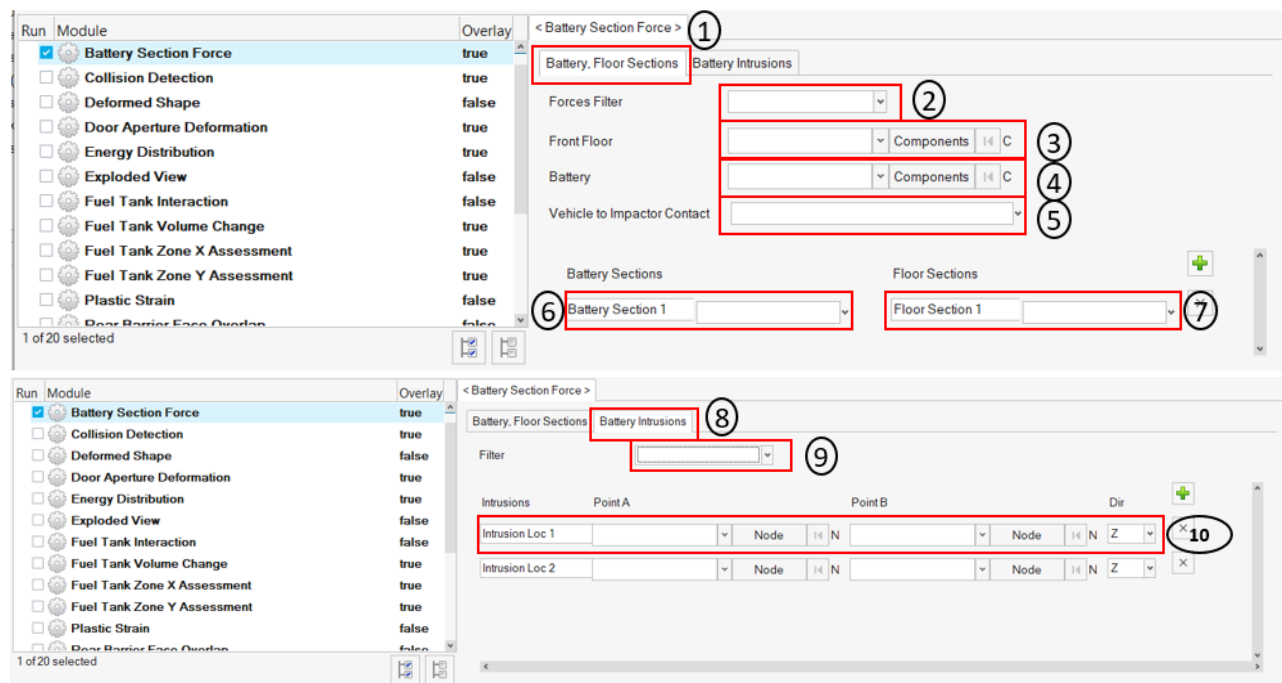

### Inputs:



- 1) For battery & floor sections, following inputs are required.
  - a. Filter class to be used for applying the filter to battery & floor cross member section forces plots
  - b. Front floor & battery components or assemblies
  - c. Vehicle to Impactor contact request
  - d. User defined battery & floor sections
- 2) For battery intrusion measurements, following inputs are required.
  - a. The source & target intrusion measurement locations. It could be either Node, Element or Component.
  - b. The measurement direction (X/Y/Z)

## Output report:

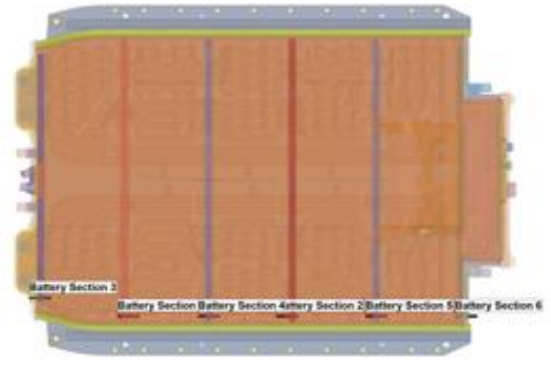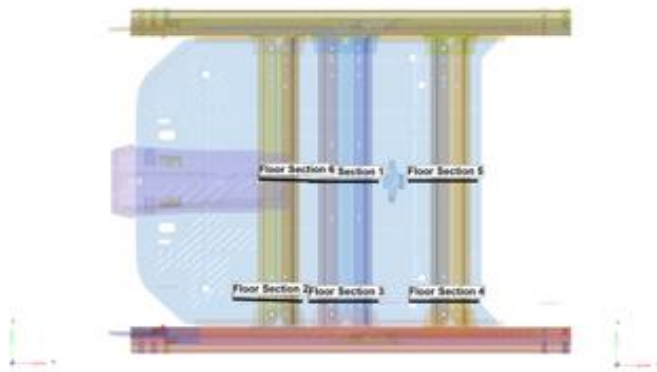


Battery Cross Member Force		Floor Cross Member Force	
Title	Force [kN]	Title	Force [kN]
Battery Section 1	6.37	Floor Section 1	20.89
Battery Section 2	4.44	Floor Section 2	16.18
Battery Section 3	1.07	Floor Section 3	15.36
Battery Section 4	5.10	Floor Section 4	58.88
Battery Section 5	4.56	Floor Section 5	68.69
Battery Section 6	2.56	Floor Section 6	14.13

Battery Intrusion	
Title	Intrusion [mm]
Intrusion Loc 1	12.78
Intrusion Loc 2	0.64
Intrusion Loc 3	0.72
Intrusion Loc 4	1.74

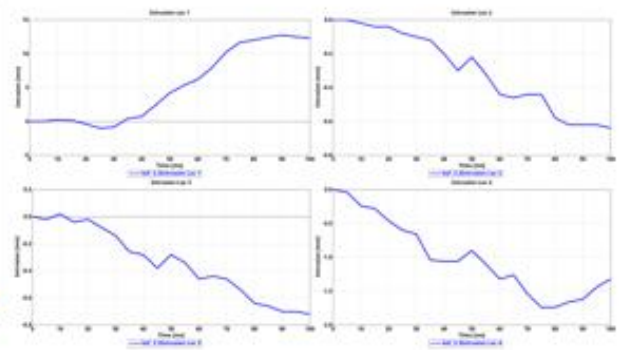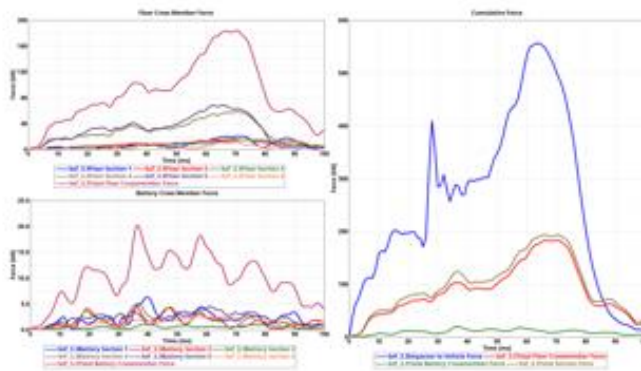

## BOM


BOM module is an advanced exploded view module. It has the capability to include data name attributes as annotations in the report. Users can pick from several data names (around 100) related to components, property, and material entity attributes. The selected BOM info can be easily attached as annotations to the components in the exploded view.

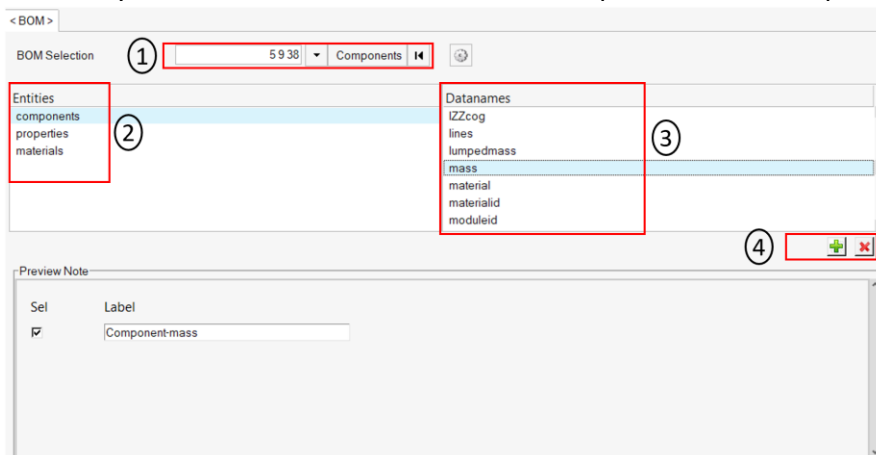

### Inputs:


- 1) Select the assembly IDs or components IDs that should be included in the BOM report
- 2) Select the entity type for which the data name attribute should be searched
- 3) Select the appropriate data names from the list
- 4) Click on + icon to add the selected attribute

### Output report:

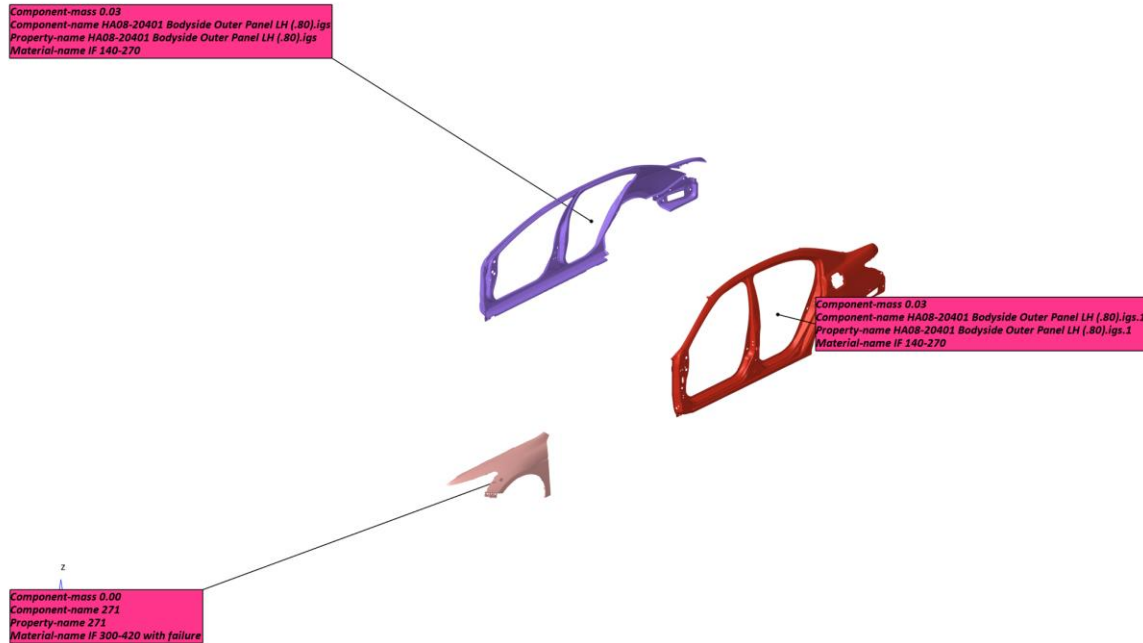

## Collision Detection

Collision detection module is used to perform collision interference checking. This module lets users to define a collision set by selecting a pair or groups of components (parts) and then detect penetration between the two pairs. Users can define multiple collision sets. This capability allows users to quickly perform design reviews.

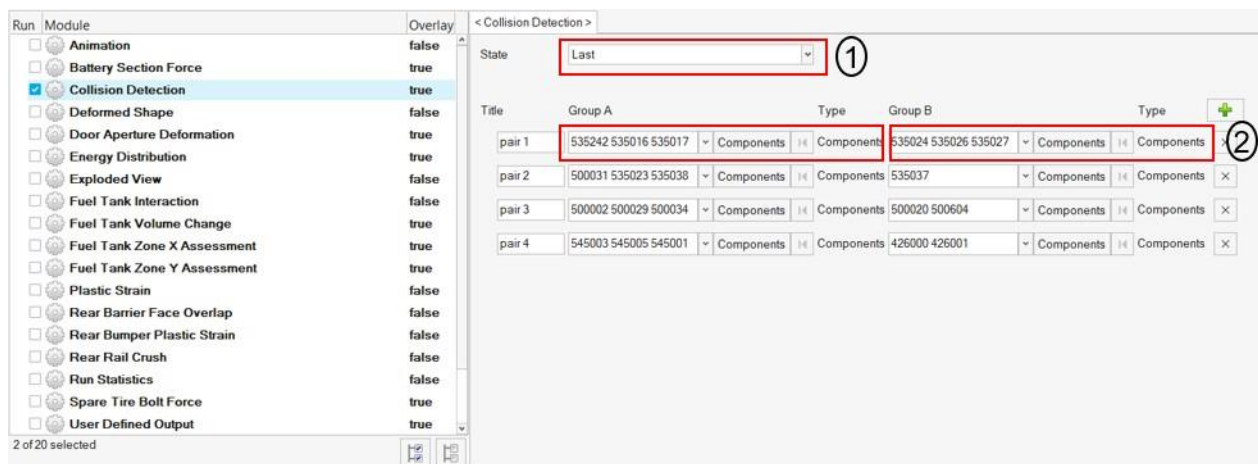


### Inputs:

- 5) Select the time step state at which the collision detection is performed
- 6) Select the components (parts) for each of the two Groups A & B. This forms one collision set. Likewise, users can define multiple collision sets

### Output report:

**pair 2**

Collision Plot  
■ Collision  
■ Proximity  
■ Safe  
■ No Result

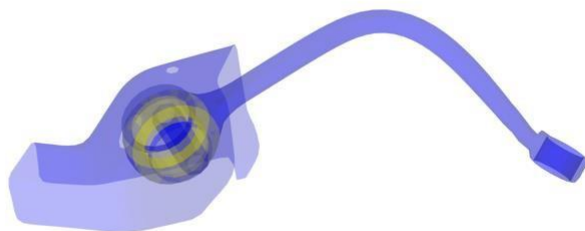


## Contour Plot

This is a generic module that allows users to define 4 different types of pages and layouts (namely **Contour** page, **Section** page, **Hotspot** Page & **Zoom** page) and include them in the report. It has the following capability.

- Ability to generate reports with any scalar result datatype contour.
- Ability to find Hotspots & report them.
- Ability to draw section cuts.
- Ability to capture images with user specified zoom factor.

The GUI and the various inputs that are required to be defined are mentioned below.

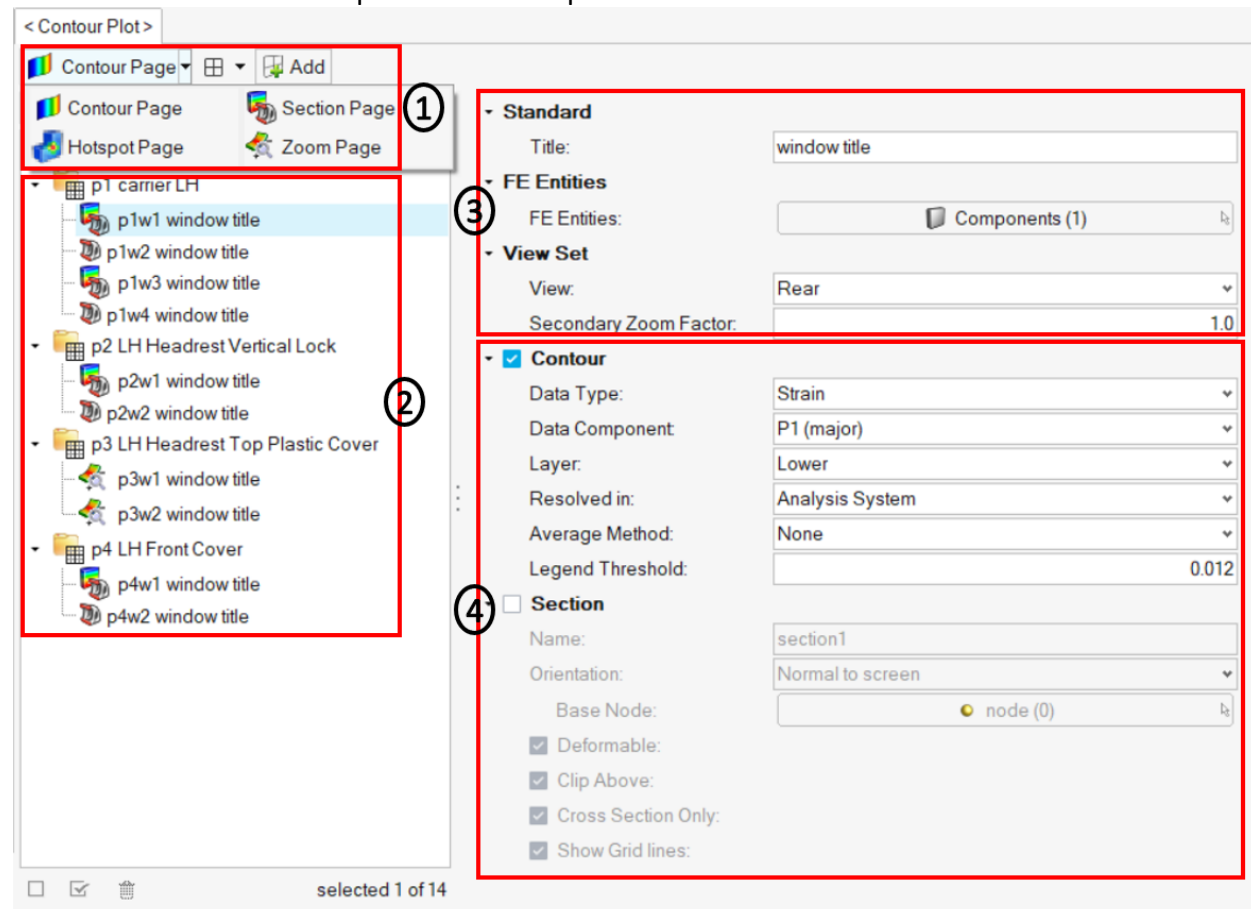


### Inputs:

- 1) Use this input to select the page & window layout that will be captured and included in the report. The layouts supported are different for different page types as mentioned below.
  - a. Contour page – 1 x 1, 1 x 2 & 2 x 2
  - b. Section page – 1 x 2 & 2 x 2
  - c. Hotspot page – 1 x 1
  - d. Zoom page - 1 x 2 & 2 x 2.

Select the required layout and click on **Add** button to add the page layout into the entity list browser.

- 2) The **Entity** list browser is used to list and manage the pages included by the user and their respective layouts.
- 3) Enter the **Title** used for the slide title in the report, select the **Components** to be used for the current page type selected and the **View Set** to be used to orient the components.
- 4) Define the **Contour & Section** details (& all its attributes) to be applied while generating the report for the Contour module.

### Output: Section page with 2 x 2 layout

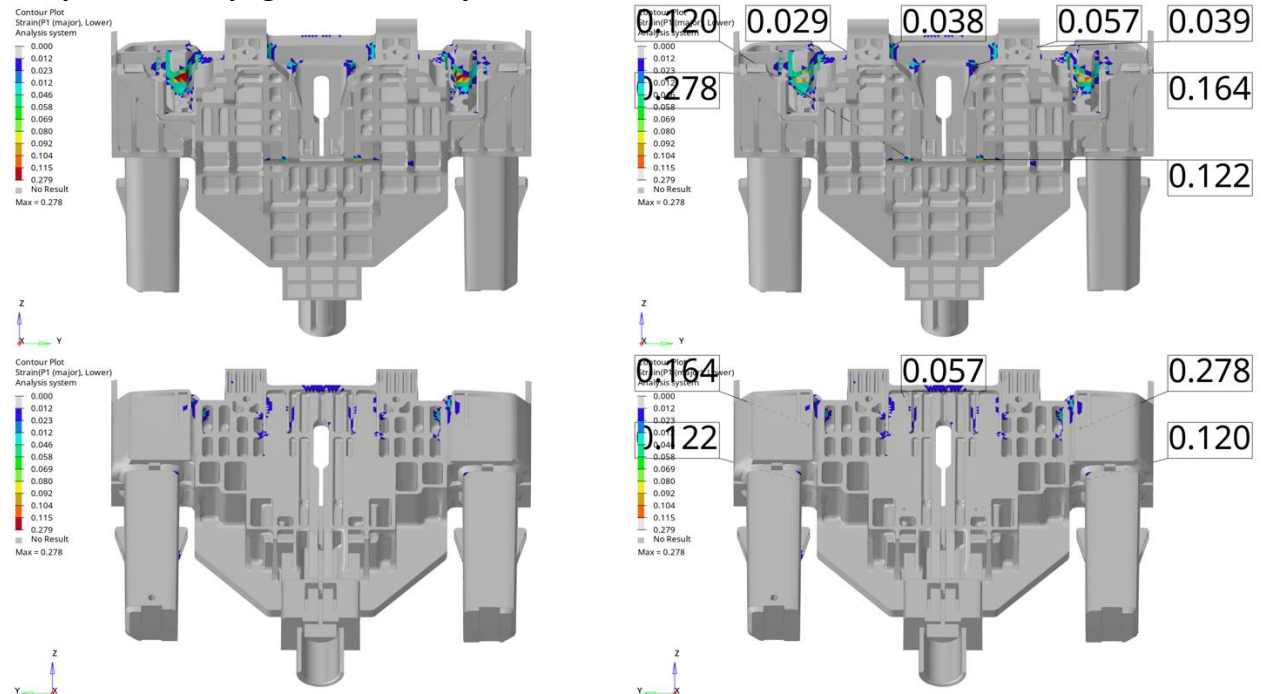

## Deformed Shape

This module is used to create deformed shape of the user selected part sets (components or assemblies) in standard views (Left, Right, Top, Bottom, Front, Rear & Isometric views)

Run	Module	Overlay
<input type="checkbox"/>	Animation	false
<input type="checkbox"/>	Dash Intrusion Contour Plot	false
<input type="checkbox"/>	Dash Intrusion Cross Section	true
<input checked="" type="checkbox"/>	Deformed Shape	false
<input type="checkbox"/>	Energy Distribution	true
<input type="checkbox"/>	Engine Mount Failure	false
<input type="checkbox"/>	Exploded View	false
<input type="checkbox"/>	Load Path	true
<input type="checkbox"/>	Occupant	true
<input type="checkbox"/>	Pedal Column Motion	true
<input type="checkbox"/>	Run Statistics	false
<input type="checkbox"/>	Structural Assessment	false
<input type="checkbox"/>	Structural Vehicle Kinematics	false
<input type="checkbox"/>	Structure Plastic Strain	false
<input type="checkbox"/>	User Defined Output	true
<input type="checkbox"/>	Vehicle Kinematics Vertical	true
<input type="checkbox"/>	Vehicle Kinematics XY Disp	true
<input type="checkbox"/>	Wheel Kinematics	false

1 of 20 selected

Configuration				
Tracking System				
N1	15287725	Node		
N2	21088810	Node		
N3	21089957	Node		
Title		Type	View	
Deform_1	9 24 25 56 57	Assemblies	Assemblies	ISO
Deform_2	24 25 56	Assemblies	Assemblies	LEFT
Deform_3	24 25 56	Assemblies	Assemblies	TOP

### Inputs:


- 1) Node ID 1, 2 & 3 for defining tracking system
- 2) Label to be used for the slide title
- 3) Assembly IDs that will be considered for deformed shape
- 4) The view to be used for deformed shape image capture

Deformed Shape – Deform\_1\_TOP



## Displacement Plot



This module is used to generate a summary report of displacement contour for the user selected components.

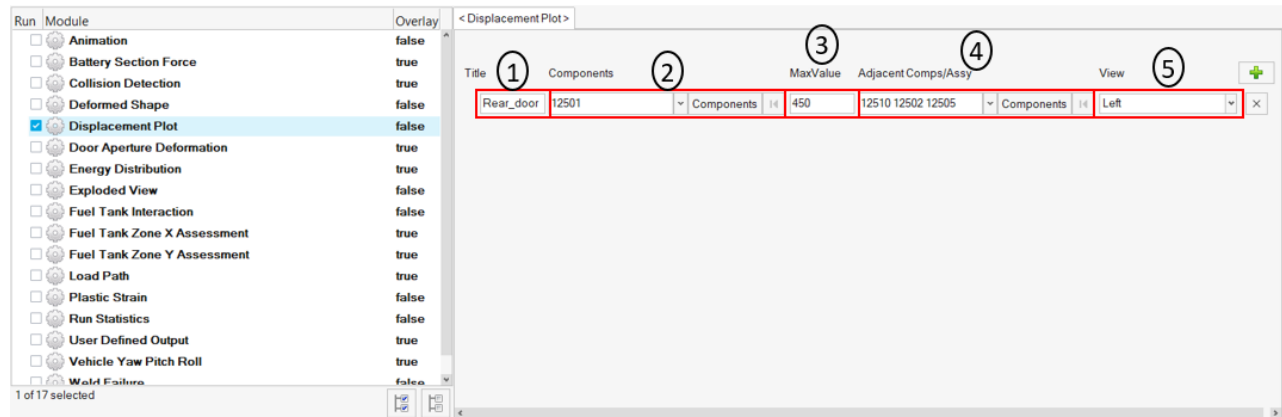

### Inputs:


- 1) The component label
- 2) The component IDs used for creating displacement contour plots
- 3) The displacement upper limit that is set when applying the contour
- 4) The adjacent (or neighboring) components to be included in the image (transparent mode)
- 5) The standard view that should be set when capturing the image

### Contour Plot Displacement(Mag, Mid) Analysis system Simple Average

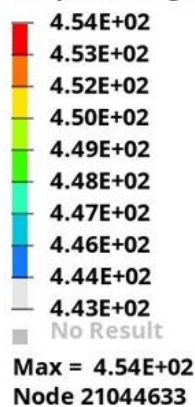

## Door Aperture Deformation

This module is used to record the maximum door deformation using spring elements.

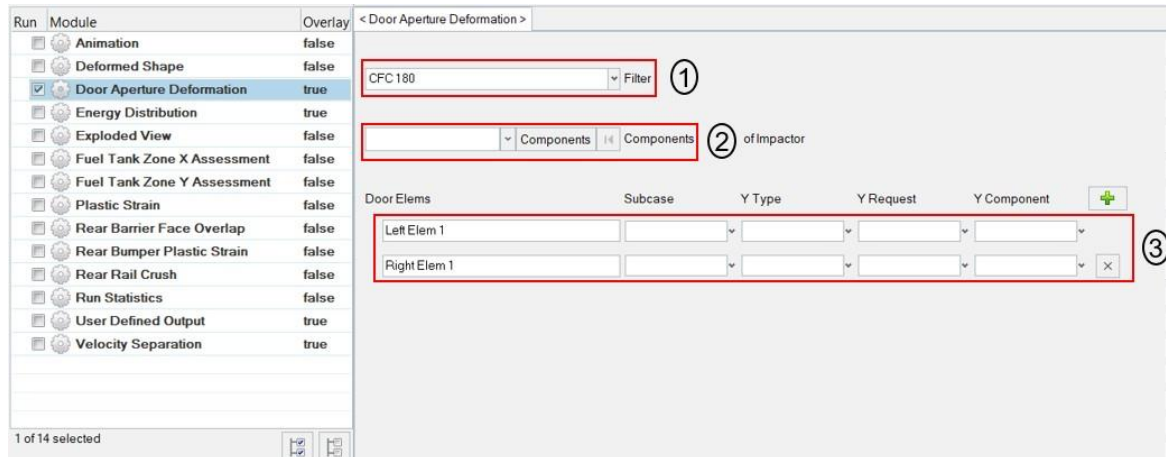

Run	Module	Overlay
<input type="checkbox"/>	Animation	false
<input type="checkbox"/>	Deformed Shape	false
<input checked="" type="checkbox"/>	Door Aperture Deformation	true
<input type="checkbox"/>	Energy Distribution	true
<input type="checkbox"/>	Exploded View	false
<input type="checkbox"/>	Fuel Tank Zone X Assessment	false
<input type="checkbox"/>	Fuel Tank Zone Y Assessment	false
<input type="checkbox"/>	Plastic Strain	false
<input type="checkbox"/>	Rear Barrier Face Overlap	false
<input type="checkbox"/>	Rear Bumper Plastic Strain	false
<input type="checkbox"/>	Rear Rail Crush	false
<input type="checkbox"/>	Run Statistics	false
<input type="checkbox"/>	User Defined Output	true
<input type="checkbox"/>	Velocity Separation	true

1 of 14 selected

< Door Aperture Deformation >

CFC 180 Filter ①

Components ② of Impactor



Door Elems	Subcase	Y Type	Y Request	Y Component
Left Elem 1				
Right Elem 1				

③

### Inputs:

- 1) Filter class if required to filter the deformation curve
- 2) Impactor assembly or component ID which will be hidden from the image
- 3) The left & right door spring element request info (from time history file) for plotting the deformation curves

Left Door Aperture		Right Door Aperture	
Title	Peak Deformation [mm]	Title	Peak Deformation [mm]
Left Elem 1	0.00	Right Elem 1	0.00
Left Elem 2	0.00	Right Elem 2	0.00
Left Elem 3	0.00	Right Elem 3	0.00
Right test	0.43	Left test	0.20

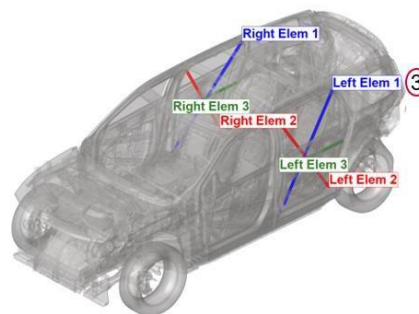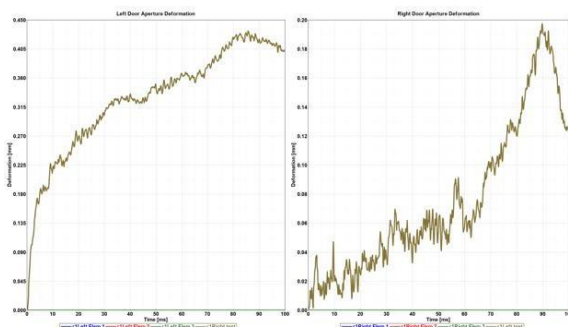


## Energy Distribution

The Energy Distribution module is used to create energy distribution plots (bar graphs) for the barrier (system level) as well as for user selected sub systems such as BIW-upperbody, BIW-underbody etc.


For the barrier, energy plots are created for Initial kinetic energy, residual kinetic energy, total internal energy, vehicle internal energy and barrier internal energy.

A pie chart is also created showing energy distribution for residual kinetic energy along with vehicle & barrier internal energy.

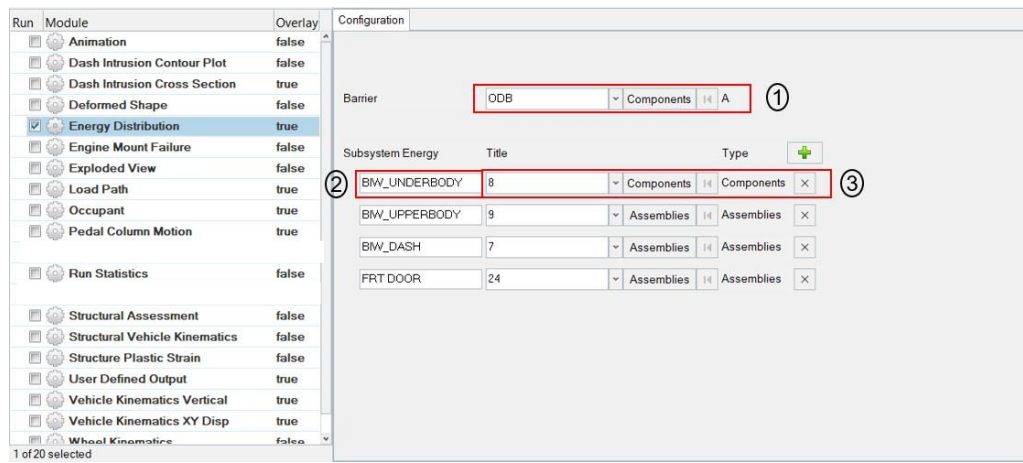


### Inputs:

- 1) Barrier assembly or component ID
- 2) Subsystem name
- 3) Subsystem assembly or component ID

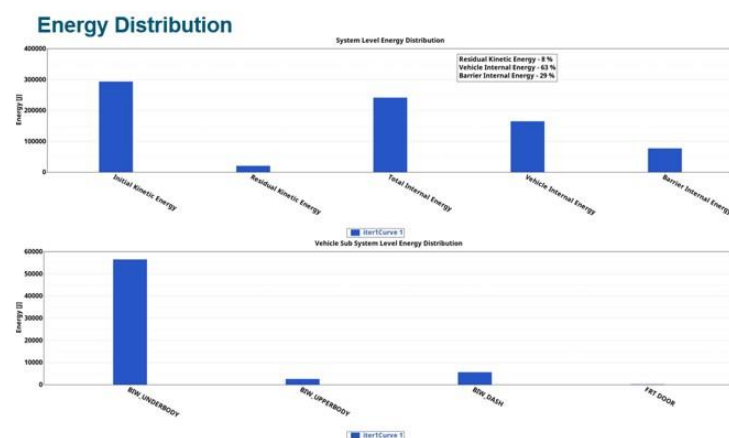


Energy Distribution Pie Chart

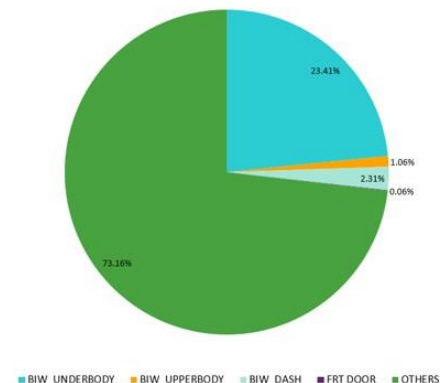


## Exploded View

Exploded view lets you create images of parts in exploded view. For each user selected assembly, the parts are isolated (10 parts per slide) and exploded view is drawn and image is captured. Each part in exploded view is tagged with an annotation. It contains the part name, the material name and the assigned thickness.

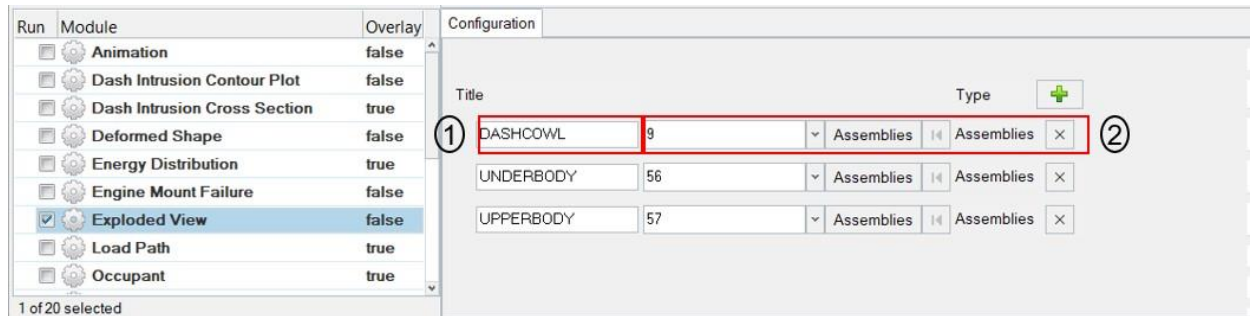


### Inputs:

- 1) Title for the assembly that is considered for exploded view
- 2) Assembly or Component ID used for exploded view

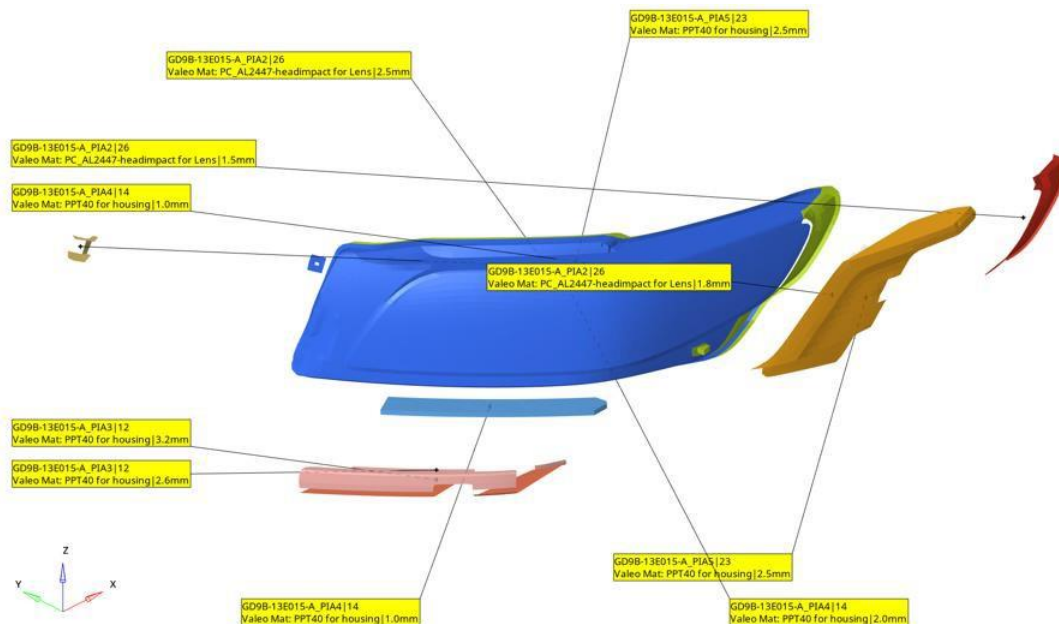

## Fuel Tank Interaction

This module is used to perform collision interference checking between the fuel tank assembly and the parts around it. The inputs are fuel tank assembly and the surrounding parts which might collide or meet with the fuel tank assembly during the simulation. The module will check and find out if penetration exists between the two groups. Accordingly, the components are colored, and an animation file (avi) is captured and embedded into the PPT. Users can define multiple parts.

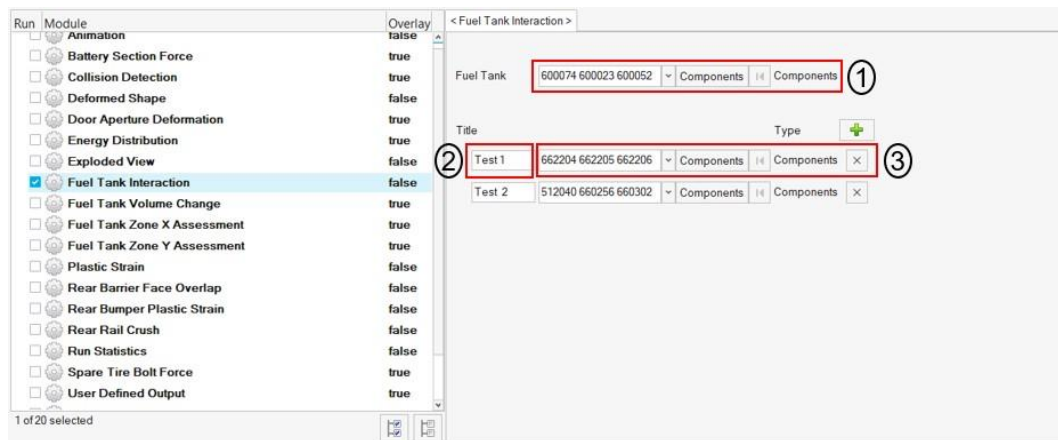


### Inputs:

- 1) Select the fuel tank assembly (components or assembly)
- 2) Enter a title that is used as slide title in the PPT report
- 3) Select the components (assemblies) that might come in contact with the fuel tank assembly


### Output report:

#### Test 1

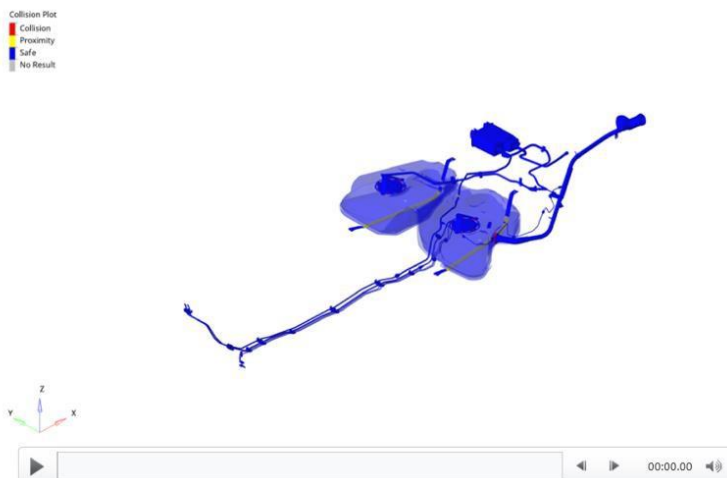

## Fuel Tank Zone X Assessment


This module is used to evaluate the deformation of fuel tank zone spring elements. It computes the deformation between fuel tank zone cross members along X direction by measuring the spring element deformations.

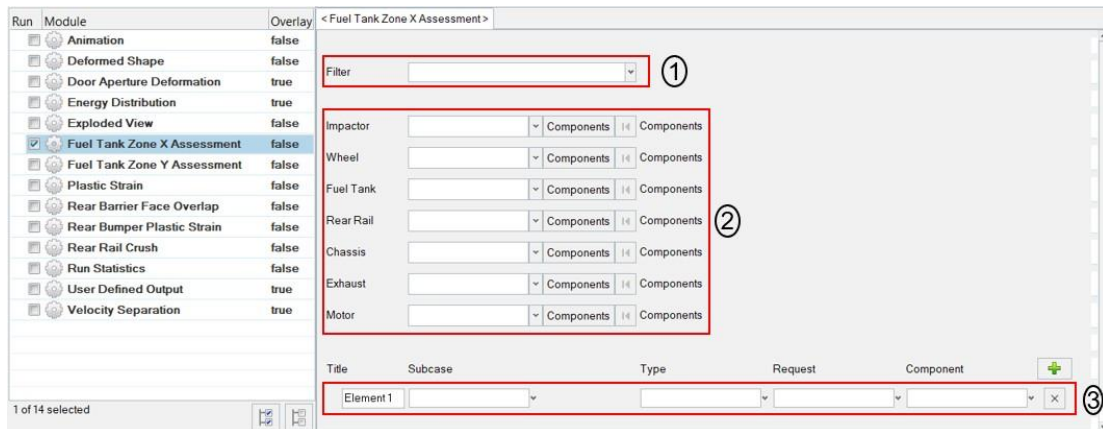

Inputs:


- 1) Filter class to be used if required to filter the deformation curve
- 2) Fuel tank zone cross members comp ID / Assy ID
- 3) The spring element request info (from time history file) for plotting the deformation curves

Fuel Tank Zone X Assessment	
Title	Peak Deformation
Element 1	0.00
Element 2	0.00

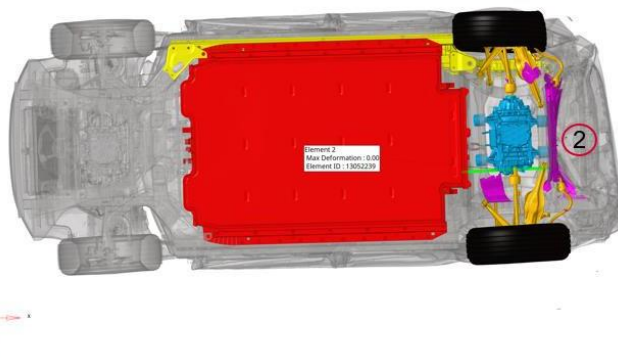

## Fuel Tank Zone Y Assessment

This module is used to evaluate the deformation of fuel tank zone spring elements. It computes the deformation between fuel tank zone cross members along Y direction by measuring the spring element deformations.

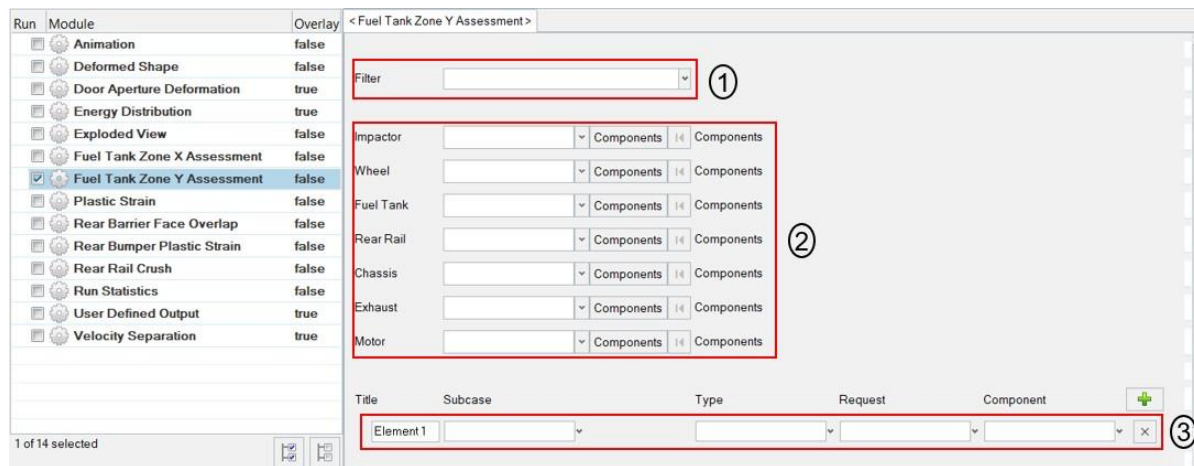


### Inputs:

- 1) Filter class to be used if required to filter the deformation curve
- 2) Fuel tank zone cross members comp ID / Assy ID
- 3) The spring element request info (from time history file) for plotting the deformation curves

3

Fuel Tank Zone Y Assessment	
Title	Peak Deformation
Element 1	0.00
Element 2	0.00
Element 3	0.00

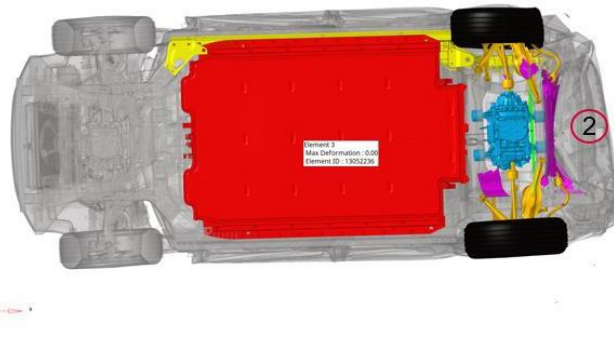




## Load Path Summary


#	Title	Peak Load [LHS] (KN)	Area (mm <sup>2</sup> )	Ix (mm <sup>4</sup> )	Iy (mm <sup>4</sup> )	J (mm <sup>4</sup> )	Sx (mm <sup>3</sup> )	Sy (mm <sup>3</sup> )	Peak Load [RHS] (KN)	Area (mm <sup>2</sup> )	Ix (mm <sup>4</sup> )	Iy (mm <sup>4</sup> )	J (mm <sup>4</sup> )	Sx (mm <sup>3</sup> )	Sy (mm <sup>3</sup> )
r1_m1_front															
1	Rail Front	141.00	38.37	178846.17	51224.93	-43216.83	847.13	693.77	18.93	38.37	16516.837	51224.92	-45234.58	847.13	693.77
2	Rail Mid	135.32	36.67	104454.26	65096.91	40738.48	792.97	679.60	14.11	36.63	63340.71	79026.63	17641.33	791.38	681.85
3	Rail Rear	125.37	39.52	124027.32	71430.19	-43017.08	880.11	776.17	27.44	39.52	18420.611	55540.15	-48580.74	880.11	776.17
4	Subframe Front	67.17	17.45	3589.02	8405.00	0.00	214.27	280.17	12.62	17.45	3589.02	8405.00	0.00	214.27	280.17
5	Subframe Mid	63.52	17.81	4033.52	8729.89	-0.58	228.13	290.98	24.74	17.81	4033.10	8729.89	0.54	228.20	290.98
6	Subframe Rear	49.07	17.45	3589.01	8405.06	0.00	214.27	280.17	26.45	17.45	3589.01	8405.06	0.00	214.27	280.17
7	Shotgun Front	23.95	64.34	74444.15	272987.83	-22519.68	699.06	1554.85	4.45	64.34	59385.91	278937.03	-34549.85	699.07	1554.85
8	Shotgun Mid	21.84	38.94	34520.59	143438.48	7054.20	791.54	961.01	20.31	38.94	47275.78	121756.20	39462.78	791.55	961.32
9	Shotgun Rear	31.99	131.04	2977343.36	4236128.96	3173750.07	4893.40	2722.56	35.47	136.25	21570.9805	1226453.29	-446369.53	3312.09	4441.09
10	Rocker Front	115.19	120.65	8934548.12	336710.24	-176468.24	12426.70	3454.34	17.31	120.65	97954.5107	904324.39	999808.24	12426.70	3454.34

## Cross Section Force Plot

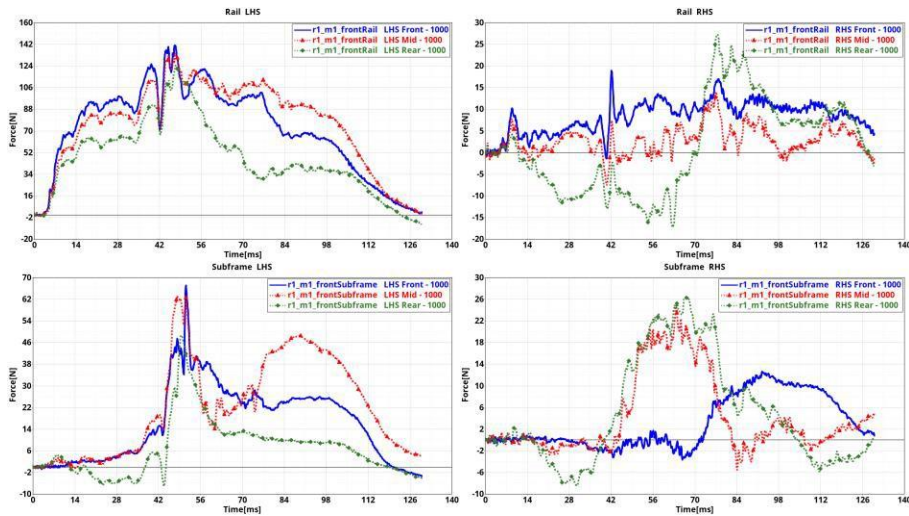



## Measure Plot

This is a generic module that allows users to apply various types of measures on the 3D animation results data, generate animations and measure plots and include them in the report. The GUI and the various inputs that are required to be defined are mentioned below.

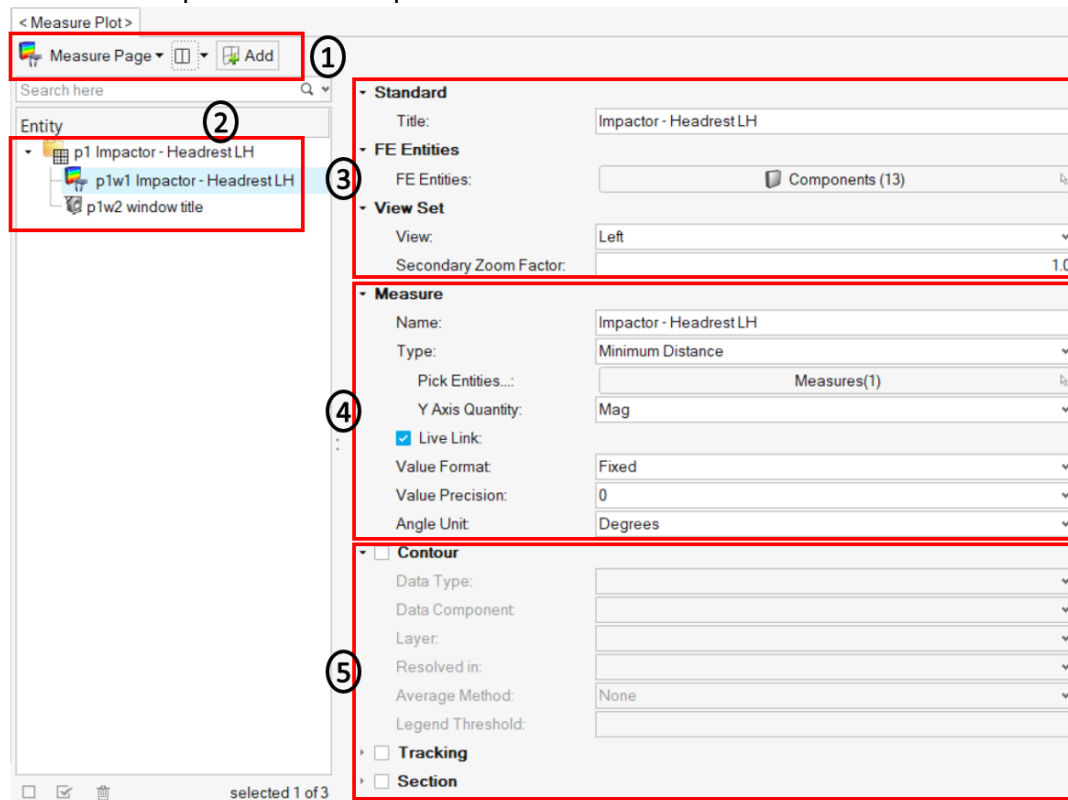

### Inputs:

- 1) Use this input to select the page & window layout that will be captured and included in the report. 2 layouts are supported i.e. 1 x 2 and 2 x 2. Select the layout and click on **Add** button to add the page layout into the entity list browser.
- 2) The **Entity** list browser is used to list and manage the pages included by the user and their respective layouts.
- 3) Enter the **Title** used for the slide title in the report, select the **Components** to be used for the current measure and the **View Set** to be used to orient the components.
- 4) Define the **Measure** and all of its attributes to be applied such as measure type, measure entities, format & precision for the measure etc.
- 5) Optionally user can also enter the **Contour**, **Tracking** & **Section** details to be applied while generating the report for the Measure module.

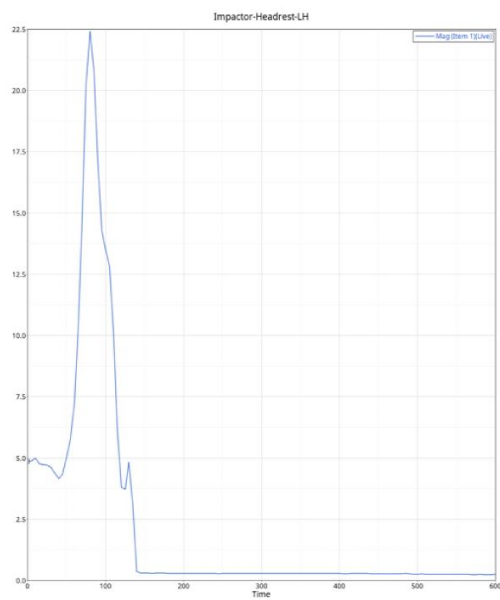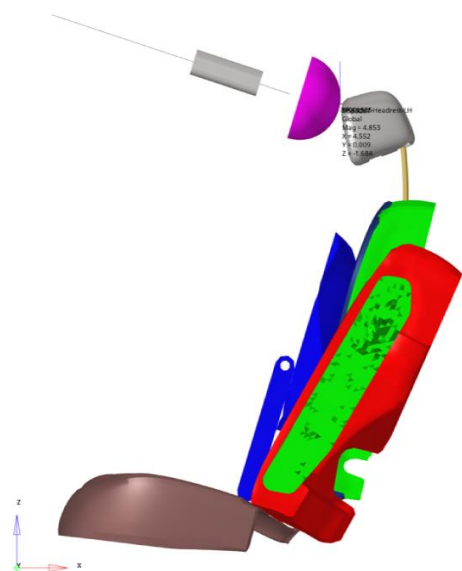

## Occupant

Occupant module allows users to create occupant safety report for various regulations and crash modes. It generates following summary report based on user selected info.


- 1) Occupant summary table
- 2) Bar graphs comparing the Driver/Passenger results against the regulation criteria
- 3) Occupant performance plots

ASRM has the capability to generate occupant report for the following side impact regulation and crash modes. For each regulation, the corresponding dummy types & versions supported is also listed in the below table.

Crash Regulation	Crash Mode	Structure	Occupant
CNCAP	MDB	Yes	1st Row Left – WSID 5.0, 6.0, 7.0 2nd Row Left – SBLD 4.0.2, 4.3.1
ECE R95	MDB	Yes	1st Row Left – ES2Re 6.0, 7.0, 8.0.2
EURONCAP	MDB	Yes	1st Row Left – WSID 5.0, 6.0, 7.0 2nd Row Left – Q10; 2nd Row Right – Q6
EURONCAP	Pole	Yes	1st Row Left (left impact) - WSID 5.0, 6.0, 7.0 1st Row Right (right impact) – WSID 5.0, 6.0, 7.0
FMVSS 214	MDB	Yes	1st Row Left - ES2RE (v6.0, 7.0, 8.0.2) 2nd Row Left - SID IIs (SBLD v4.0.2, v4.3.1)
FMVSS 214	Pole	Yes	1st Row Left – ES2RE (v6.0, 7.0, 8.0.2) / SID IIs (SBLD v4.0.2, v4.3.1)
IIHS	MDB	Yes	1st Row Left - SID IIs (SBLD 4.0.2, 4.3.1) 2nd Row Left – SID IIs (SBLD 4.0.2, 4.3.1)
LATIN NCAP	Pole	Yes	1st Row Left – ES2Re 6.0, 7.0, 8.0.2
LINCAP	MDB	Yes	1st Row Left – ES2RE (v6.0, 7.0, 8.0.2) 2nd Row Left – SID IIs (SBLD 4.0.2, 4.3.1)
USNCAP	MDB	Yes	1st Row Left - ES2RE (v6.0, 7.0, 8.0.2) 2nd Row Left - SID IIs (SBLD v4.0.2, v4.3.1)
USNCAP	Pole	Yes	1st Row Left – ES2Re (6.0, 7.0, 8.0.2) / SID IIs (SBLD 4.0.2, 4.3.1)

Following is the list of default units used in occupant module for various quantities.

- Acceleration - g
- Force - kN
- Moment - N\*m
- Velocity - m/s
- Length - mm

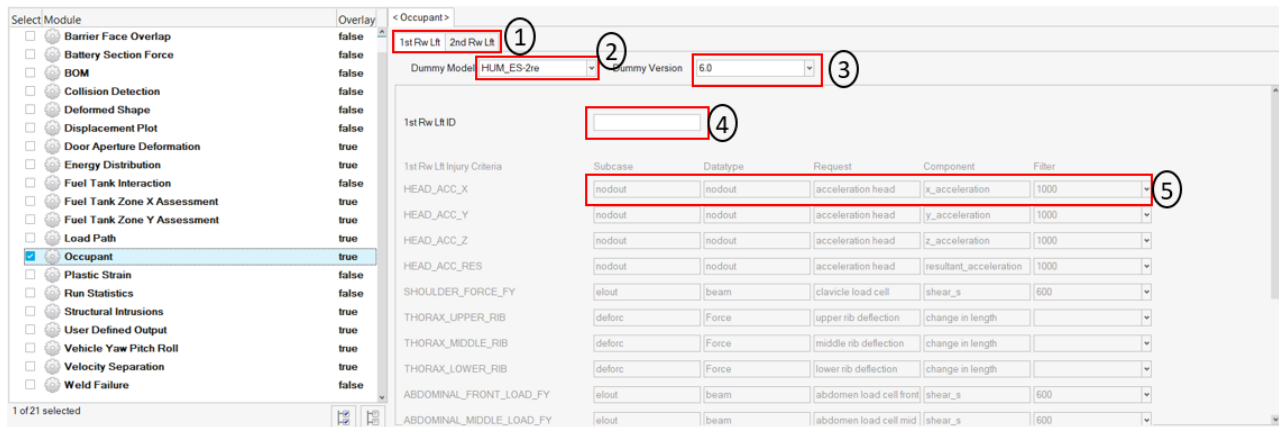

## Inputs:

1) **Tab**s allowing users to define occupant (driver & passenger) info independently

2) **Dummy model** selection option. Currently following dummy types are supported.


For the Side impact type, IIHS regulation & MDB protocol, we support SID-IIs dummy types.

For the Side impact type, LINCAP regulation, the tool supports ES2re dummy type for Drivers and SID-IIs dummy type for passengers.

3) **Dummy version** selection. Users can either select a particular version number from the drop down or set it to config option. When selecting a version number, all the subcase, datatype, request & component types along with filters are predefined for the user based on defaults config file. When user selects the config option then it is user's responsibility to define all the inputs. This is especially needed when using a newer dummy version.

4) **Driver ID / Passenger ID**. This option is enabled or used only when the dummy version is set to anything other than config. This is needed by the tool so it can differentiate between driver & passenger request IDs when plotting the occupant injury curves.


5) **Driver / Passenger Injury Criteria selection**. This option is enabled only when the dummy version is set to config. User should first make sure to load the Time History file (binout) by clicking the Load button. After loading the file, user can start defining the appropriate subcase, datatype, request & component types for each of the injury criteria.

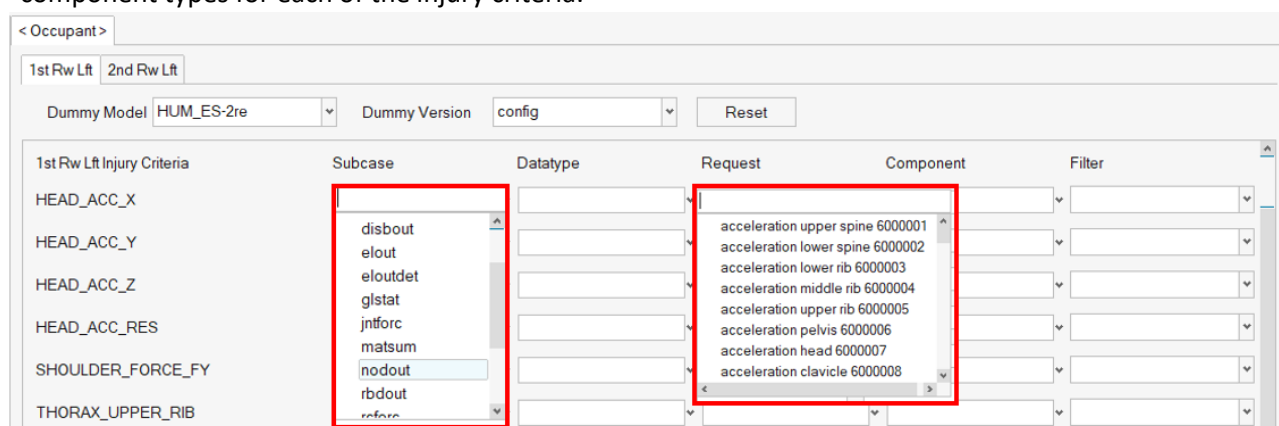


## Occupant Summary

Occupant Results	Front - SID-IIs	Rear - SID-IIs	GOOD	ACCEPTABLE	MARGINAL	POOR	Internal
HIC(15ms)	22.59	121.61	623	779	935	935	610
Upr Neck Tension (kN)	0.78	1.19	2.1	2.5	2.9	2.9	2
Upr Neck Comp (kN)	0.08	0.20	2.5	3	3.5	3.5	2.4
Upr Neck Bending MX (N-m)	10.88	23.32	-	-	-	-	67
Head Kinematics	NA	NA	See Table	See Table	See Table	See Table	-
Shoulder Defl (mm)	5.43	16.42	-	-	-	60	-
Shoulder Force Fy (kN)	0.36	1.03	-	-	-	-	2.5
Shoulder Disp spike in Load?	NA	NA	-	-	-	Yes	-
Thorax Rib Upr Defl (mm)	23.16	21.66	51	53	55	55	-
Thorax Rib Mid Defl (mm)	25.40	28.86	51	53	55	55	-
Thorax Rib Lwr Defl (mm)	24.39	33.84	51	53	55	55	-
Abdmn Rib Upr Defl (mm)	19.39	30.07	51	53	55	55	-
Abdmn Rib Lwr Defl (mm)	21.66	26.99	51	53	55	55	-
Avg Rib Defl	22.80	28.28	34	42	50	50	-
Thrx Rib Upr Defl Rate (m/s)	3.50	2.86	8.2	9.84	11.48	11.48	-
Thrx Rib Mid Defl Rate (m/s)	2.92	2.01	8.2	9.84	11.48	11.48	-
Thrx Rib Lwr Defl Rate (m/s)	2.73	2.86	8.2	9.84	11.48	11.48	-
Abdmn Rib Upr Defl Rate (m/s)	3.44	2.49	8.2	9.84	11.48	11.48	-
Abdmn Rib Lwr Defl Rate (m/s)	3.50	2.09	8.2	9.84	11.48	11.48	-
Thorax Rib Upr V*C (mm)	0.00	0.00	1	1.2	1.4	1.4	-
Thorax Rib Mid V*C (mm)	0.00	0.00	1	1.2	1.4	1.4	-
Thorax Rib Lwr V*C (mm)	0.00	0.00	1	1.2	1.4	1.4	-
Abdmn Rib Upr V*C (m/s)	0.00	0.00	1	1.2	1.4	1.4	-
Abdmn Rib Lwr V*C (m/s)	0.00	0.00	1	1.2	1.4	1.4	-
Lumbar Spine Fy (kN)	0.33	0.94	-	-	-	-	2
Lumbar Spine Mx (N-m)	62.80	92.03	-	-	-	-	114
Pelvis Iliac Force Fy (kN)	0.71	1.59	4	4.8	5.6	5.6	-
Pelvis Acetabulum Force Fy (kN)	0.76	1.51	4	4.8	5.6	5.6	-
Pelvis Combined Force Fy (kN)	1.46	3.04	4	4.8	5.6	5.6	-
Upr Femur Fy (3msec-kN)	1.22	2.62	-	-	-	-	3.9
Lwr Femur Fx (3msec-kN)	0.10	0.16	2.8	3.4	3.9	3.9	-
Lwr Femur Fy (3msec-kN)	0.20	0.12	2.8	3.4	3.9	3.9	-
Lwr Femur Mx (3msec-Nm)	139.47	164.37	254	305	356	356	-
Lwr Femur My (3msec-Nm)	26.41	24.50	254	305	322	356	-

## Bar Graph

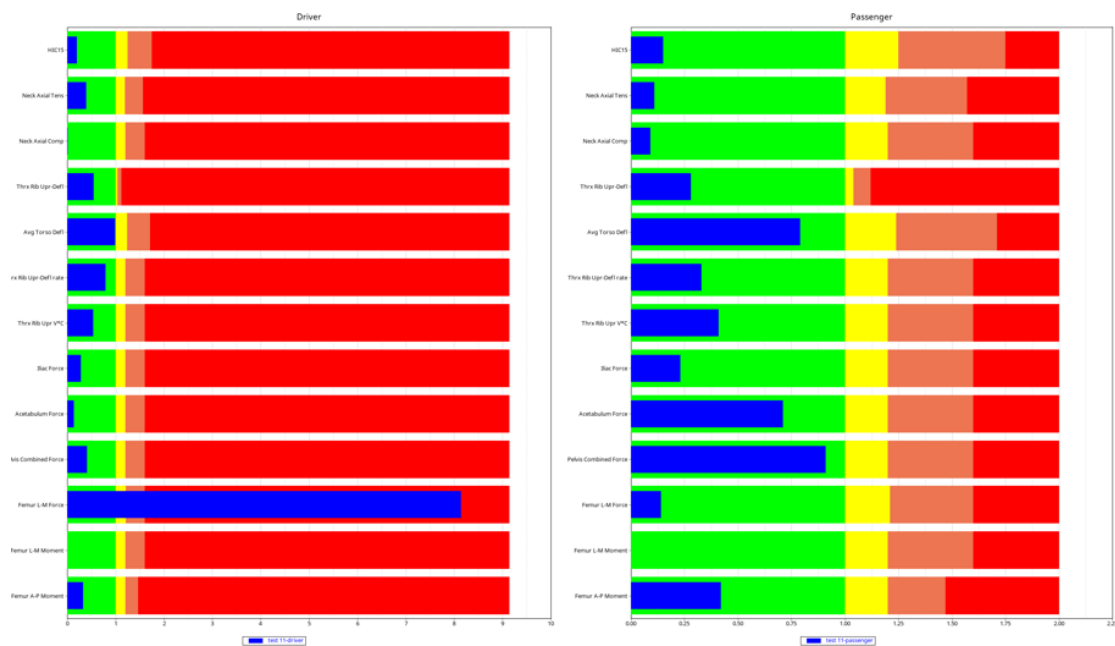

## Driver Head

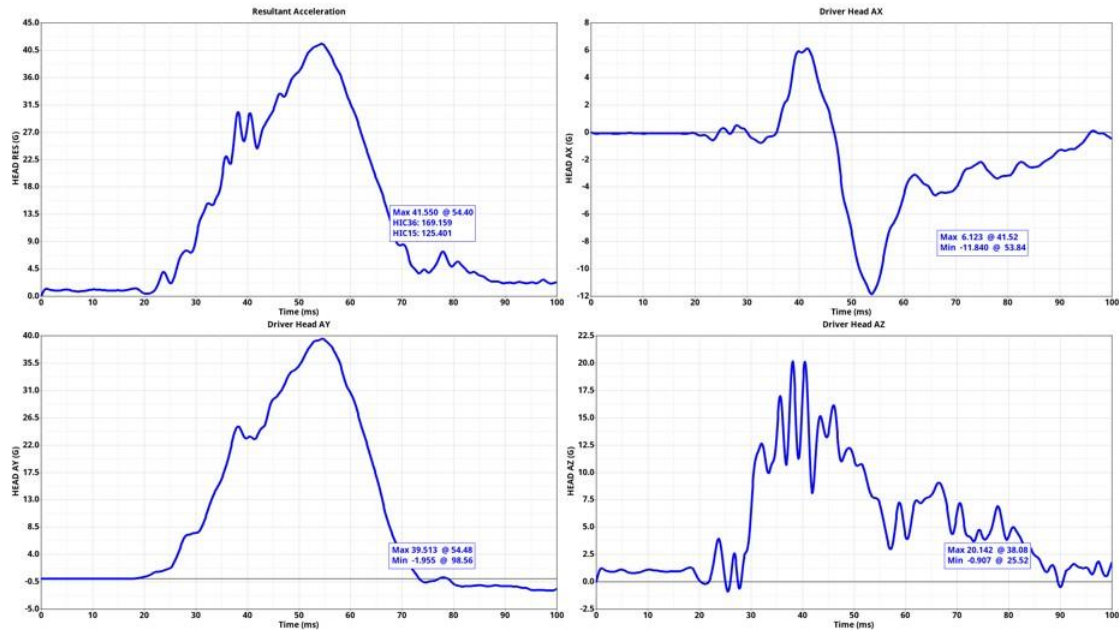

## Euro NCAP FAR Side Occupant Assessment

This module allows users to generate reports as per Euro NCAP FAR Side Occupant Assessment protocol. The points available for far side impact assessment in the final vehicle assessment is a total of 4 points, which will be combined with the full-scale AE-MDB (2 points) and pole impact (2 points) scores. The far side score will be scaled down from the individual scores of the two far side sled tests, which offer a maximum of 12 points per test.

The peak head excursion in both sled tests will be established using the onboard cameras. The maximum points available per body region in each test is dependent upon the amount of excursion observed and what specific far side impact countermeasures the vehicle is equipped with. Note that a sliding scale is not applicable to head excursion.

### Head excursion assessment zones

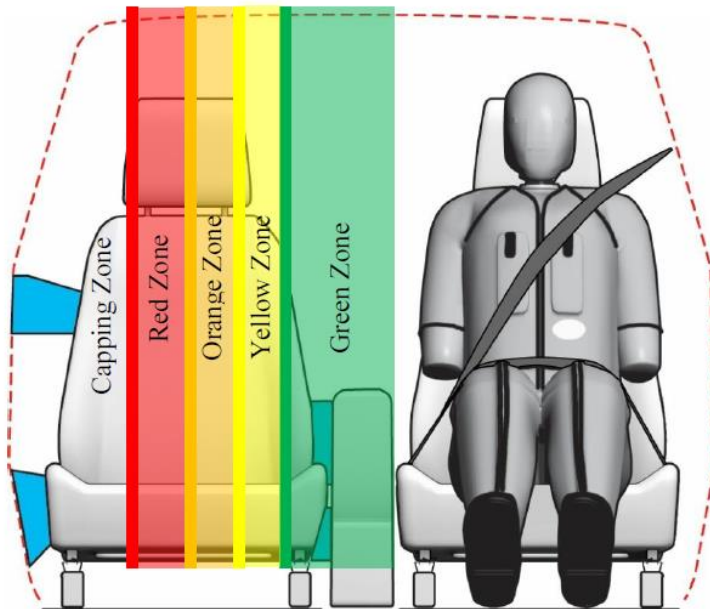


Figure 5: Head excursion zones

### Scoring for vehicles with far side countermeasure

Head Excursion						
	Capping Zone*	Red Zone**		Orange Zone	Yellow Zone	Green Zone
		≤125mm	>125mm			
Head Score	0.000	0.000	2.000	3.000	4.000	4.000
Neck Score	0.000	4.000	4.000	3.000	4.000	4.000
Chest Score	0.000	0.000	0.000	3.000	4.000	4.000
Max Dummy Score	0.000	4.000	6.000	9.000	12.000	12.000


## Scoring for vehicles without far side countermeasure

Head Excursion					
	Capping Zone*	Red Zone	Orange Zone	Yellow Zone	Green Zone
Head Score	0.000	0.000	1.000	2.000	4.000
Neck Score	0.000	1.000	1.000	2.000	4.000
Chest Score	0.000	0.000	1.000	2.000	4.000
Max Dummy Score	0.000	1.000	3.000	6.000	12.000

\* In case of head excursion in the Capping Zone, both far side tests are capped.

## Dummy criteria

	Criteria	Performance limits		
		Higher	Lower	Capping
Head	HIC <sub>15</sub> (with direct contact)	500	700	700
	Resultant 3ms acceleration	72g	80g	80g
Upper Neck	Tension Fz		3.74kN	
	Lateral flexion MxOC	162Nm	248Nm	
	Extension negative MyOC		50Nm	
Lower Neck	Tension Fz		3.74kN	
	Lateral flexion Mx(base of neck)	162Nm	248Nm	
	*Extension neg. My(base of neck)		[100]Nm	
Chest & Abdomen	Chest lateral compression	28mm	50mm	50mm
	Abdomen lateral compression	47mm	65mm	65mm

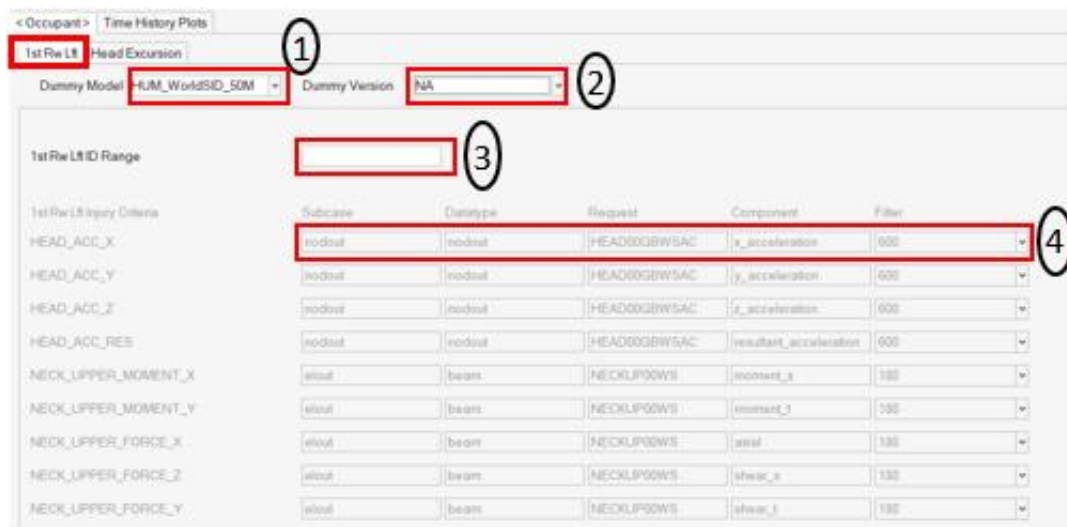

The screenshot shows the '1st R/Lt' tab for 'Head Excursion'. The 'Dummy Model' is set to 'HUM\_WorldSID\_50M' and 'Dummy Version' is 'NA'. The '1st R/Lt ID Range' is empty. The table below lists injury criteria with columns for Subcase, Datatype, Request, Component, and Filter. The 'HEAD\_ACC\_X' row is highlighted.

Subcase	Datatype	Request	Component	Filter
nodist	nodist	HEAD00GBWSAC	x_acceleration	000
nodist	nodist	HEAD00GBWSAC	y_acceleration	000
nodist	nodist	HEAD00GBWSAC	z_acceleration	000
nodist	nodist	HEAD00GBWSAC	resultant_acceleration	000
elout	beam	NECKLP00WS	moment_x	100
elout	beam	NECKLP00WS	moment_z	100
elout	beam	NECKLP00WS	axial	100
elout	beam	NECKLP00WS	shear_x	100
elout	beam	NECKLP00WS	shear_z	100

## Inputs for Dummy:

- 1) Dummy Model selection
- 2) Dummy Version selection
- 3) Enter the ID range to be considered when picking up the requests automatically
- 4) Injury Criteria selection per dummy model type & dummy version

## Input for Head Excursion:

< Occupant > Time History Plots

1st Rw Lft **Head Excursion**

Dummy Model: NA Dummy Version: config Reset

Impact Side: Left ①

Tracking System

N1: 12611046 Node ②

N2: 12610719 Node ②

N3: 12611117 Node ②

Head: 60064 Components ③

Dummy: 60000-60252 Components ③

Seat: 310000-310003 310007- Components ③

Structure: 140000 140008 140013 Components ③

Seat Centerline: 31804347 Node ④

Car Centerline: 14315411 Node ④

Max Intrusion: Node ④

View: Front ⑤

FPS: 100 ⑤

- 1) Impact side selection
- 2) Select the 3 nodes to define the tracking system
- 3) Select the Head, Dummy, Seat & Structure parts
- 4) Select the Seat Centerline, Car Centerline & Max Intrusion nodes
- 5) Select the View & the Frames Per Second value to be used when capturing the animation

## Outputs:


### Occupant Protection Point Summary



Part	1st Rw Lft Occupant Points Summary	1st Rw Lft Head Excursion Points Summary	Consolidated Points
Head	4	1	1
Neck	4	1	1
Chest	4	1	1

Total Points (out of 12)	3
--------------------------	---

## Head Excursion Detailed Summary

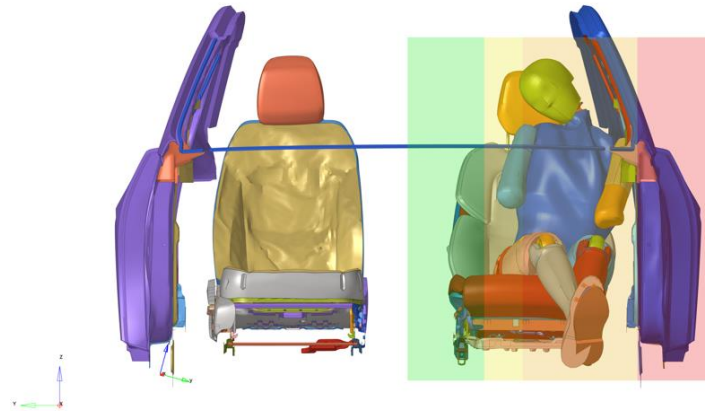


Max Head Excursion (mm)	176.35
At Time (ms)	105.00
Zone	orange
Max Head Score	1.00
Max Neck Score	1.00
Max Chest Score	1.00

## Occupant Protection Detailed Summary


Title	Higher Performance Limit	Lower Performance Limit	Side Euroncap Farside - main_iter_	Points
HIC (15ms)	500	700	147.890	4.000
Clip 3ms (g)	72	80	39.799	4.000
Upper Neck Tension +Fz (kN)	3.74	3.74	0.410	4.000
Upper Neck Flexion MxOC (Nm)	162	248	21.197	4.000
Upper Neck Extension MyOC (Nm)	50	50	37.442	4.000
Lower Neck Tension +Fz (kN)	3.74	3.74	1.120	4.000
Lower Neck Flexion MxOC (Nm)	162	248	27.270	4.000
Lower Neck Extension MyOC (Nm)	100	100	25.042	4.000
Chest Lateral Deflection (mm)	28	50	2.835	4.000
Abdomen Lateral Deflection (mm)	47	65	1.708	4.000

## 1st Rw Lft Head

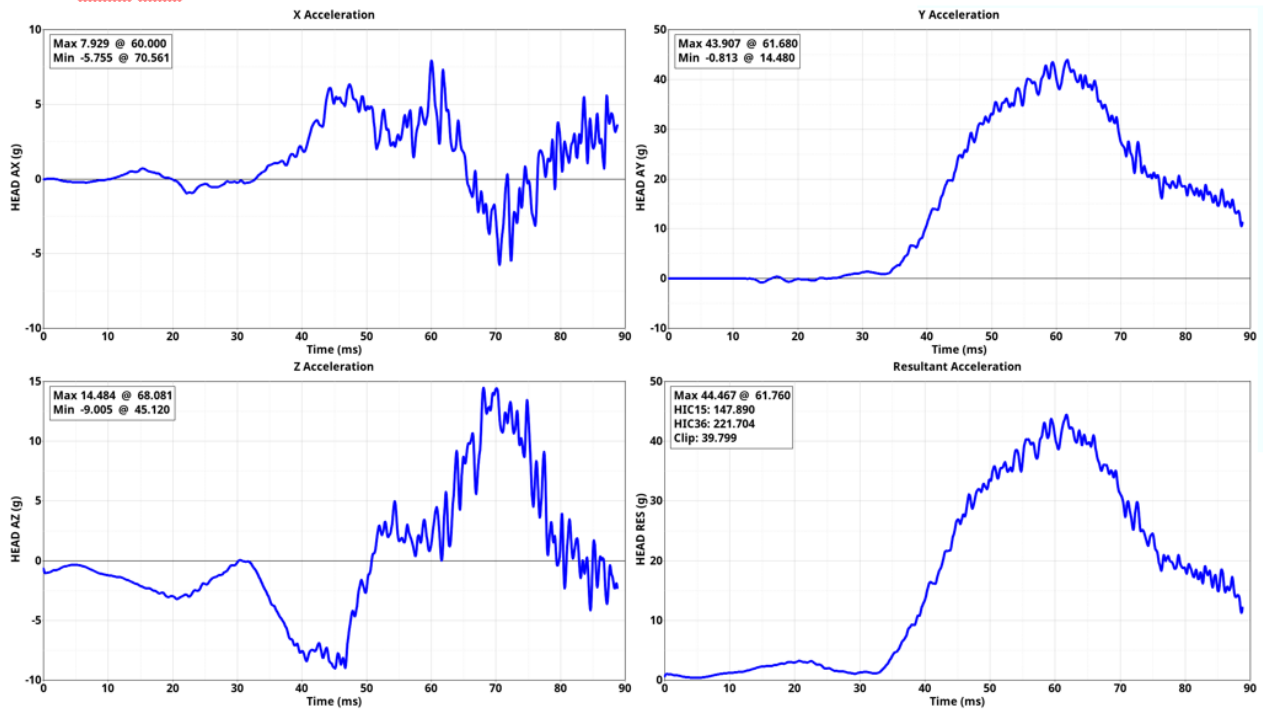

## Plastic Strain

This module is used to generate a summary report of plastic strain for the components on the outer side of the vehicle structure.

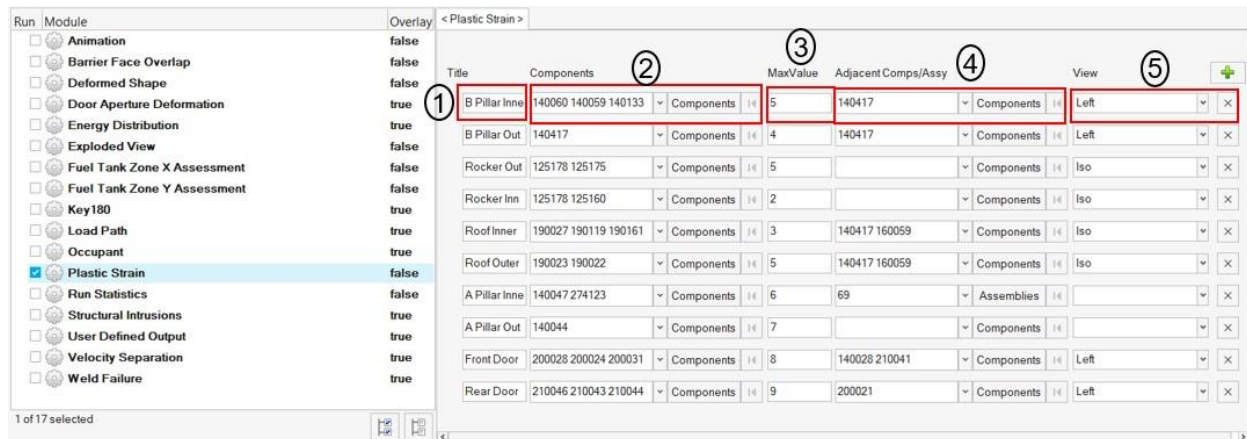



### Inputs:

- 1) The component label
- 2) The plastic strain component IDs to be plotted
- 3) The plastic strain limit that is set when applying the contour (Enter the percent value)
- 4) The adjacent (or neighboring) components to be included in the image (transparent mode)
- 5) The standard view that should be used when capturing the image

Contour Plot  
Effective plastic strain(Mag, Mid)  
Simple Average

5.90E-01  
5.00E-02  
4.37E-02  
3.75E-02  
3.13E-02  
2.50E-02  
1.88E-02  
1.25E-02  
6.25E-03  
0.00E+00  
No Result


Max = 5.90E-01  
Node 2072088

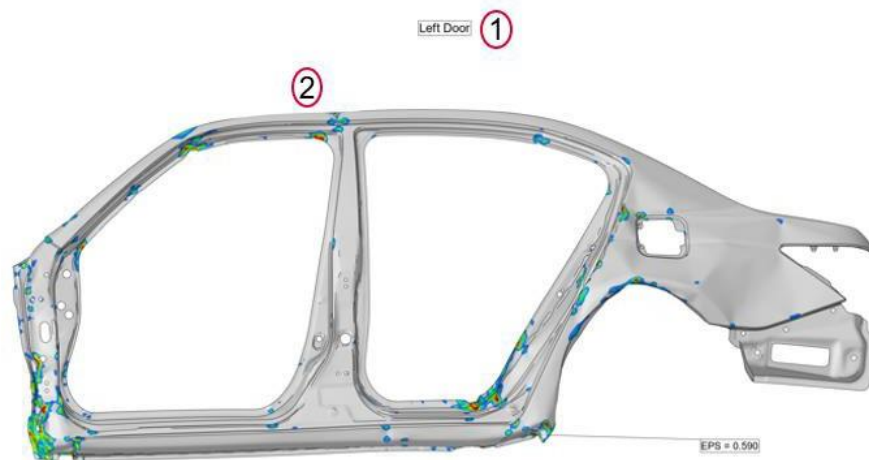

## Run Statistics


This module creates following summary info based on the inputs entered.

- 1) Model Information summary containing Program Name, Gateway, Run description, vehicle weight, solver version, run time etc.
- 2) Run Quality report which consists of termination time, termination type, mass added, energy ratio etc.
- 3) Plots consisting of global energy plots, added mass & time step plots and energy ratio plots
- 4) An image containing vehicle mass & geometric measurements
- 5) Material Internal Energy plots for the user defined Top N parts
- 6) Penetration & intersections info for the model if the flag is set to Yes

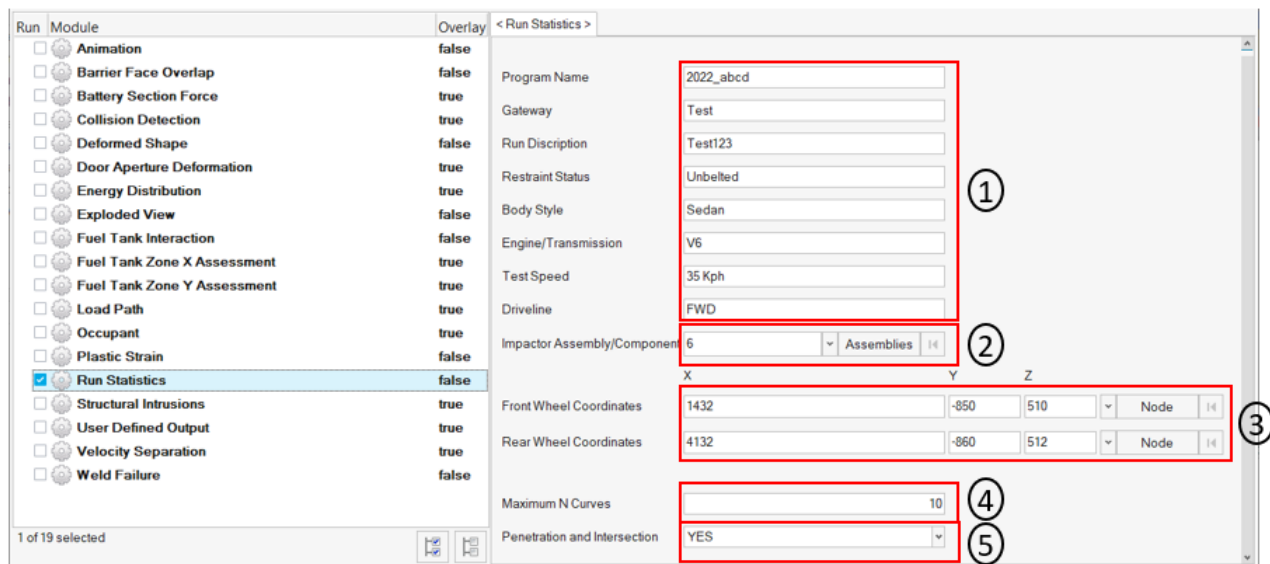

## Model Info Summary & Run Quality Report


Program Name	Test
Gateway	abcd
Run Description	Side Impact test run
Restraint Status	Beltd
Body Style	Sedan
Engine/Transmission	V6
Test Speed	35 Kph
Driveline	AWD
Run Name	Matrk
Engineer	tejer
Model Run Date	09/18/2021
Test Mode	Side IHS MDR
Gross Vehicle Weight	3.13 kg
Impactor Weight	0.00 kg
Total Weight	3.13 kg
Vehicle Front Axle Weight	1.59 kgs
Vehicle Rear Axle Weight	1.51 kgs
Solver Version	mpp v R7.1.2
Number of CPU	8 CPU
Run Time	21 hr 41 min 54 sec



35Kph


Run Quality	Result	Target
Termination Time	130.0 ms	130.0 ms
Termination Type	Normal Termination	
Mass Added @ T=0 [%]	1.89 %	< 1 %
Total Mass Added [%]	1.51 %	< 3 %
Total Mass Added [kg]	27.636 kg	
Energy -> Hourglass [%]	2.525 %	< 10 %
Energy -> Ratio [%]	1.0119 %	1.0 >= Energy Ratio < 1.01

## Global Energy, Added Mass, Time Step & Energy Ratio Plots

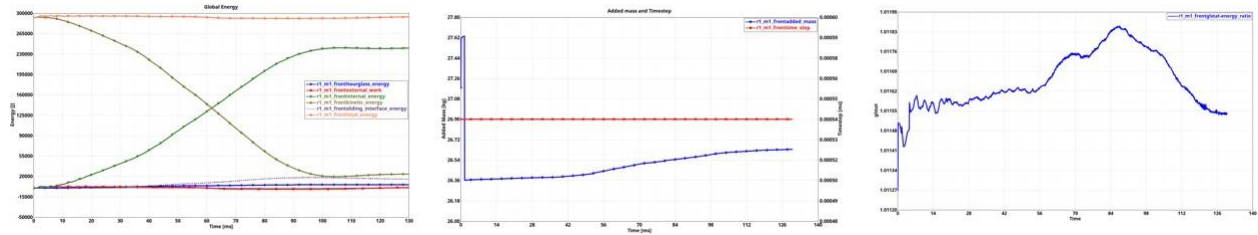



## Vehicle Mass & Geometric Measurements

Vehicle Mass (kg)	1826.09 kg
Front Axle weight %	55.67%
Rear Axle weight %	44.33%

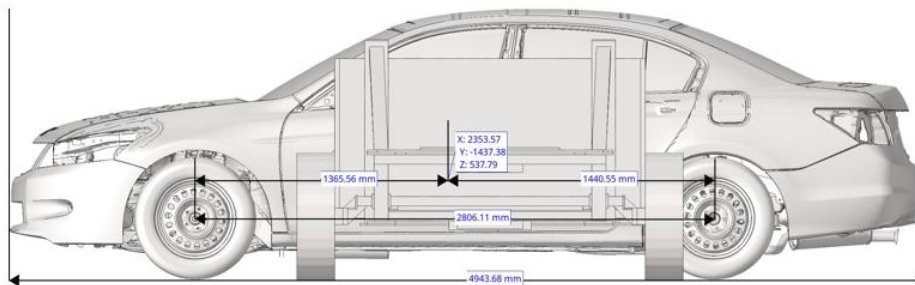


## Material Internal Energy Summary

### Material Internal Energy - Exploded View (Top 10)

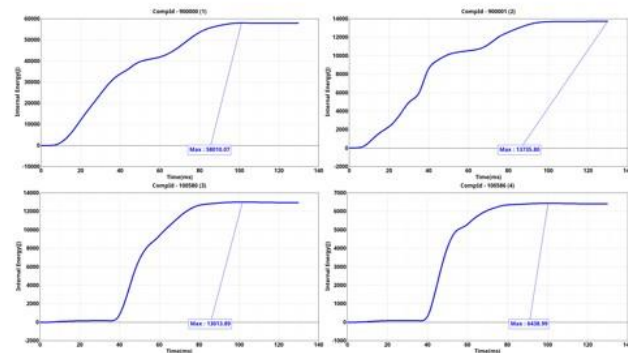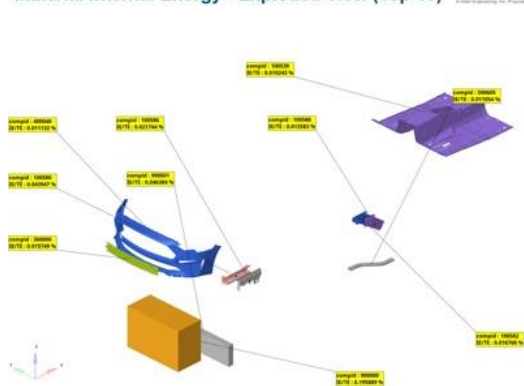

## Structural Intrusions

This module primarily computes structural intrusion for Bpillar as per IIHS regulation.

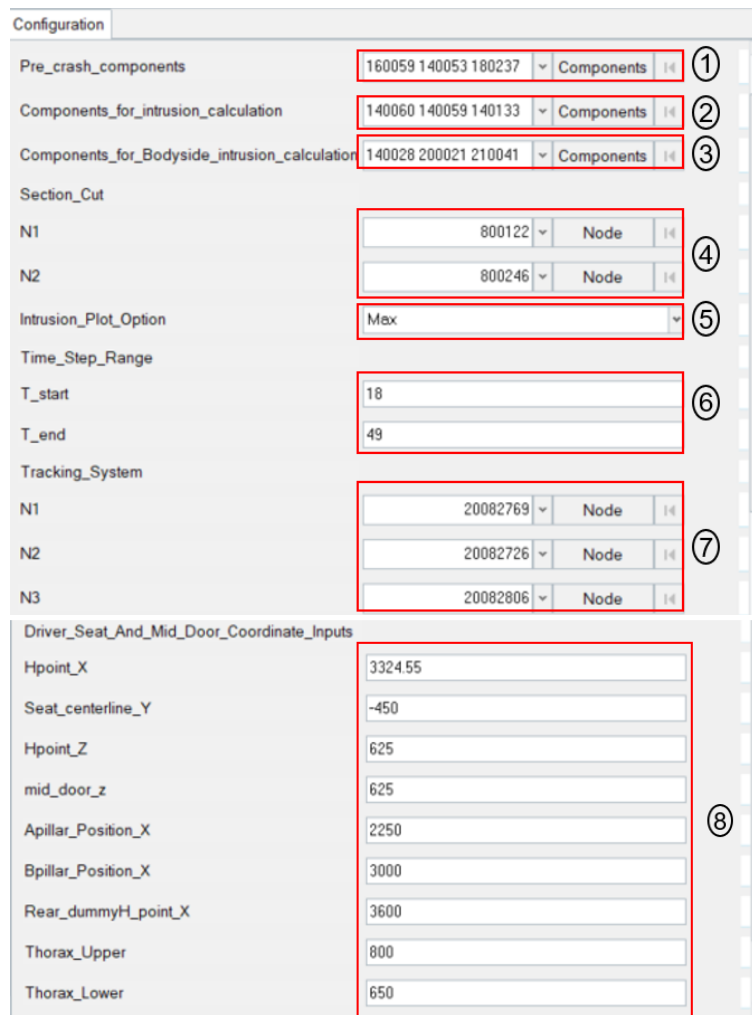

Field	Value	Unit
Pre_crash_components	160059 140053 180237	Components
Components_for_intrusion_calculation	140060 140059 140133	Components
Components_for_Bodyside_intrusion_calculation	140028 200021 210041	Components
Section_Cut N1	800122	Node
Section_Cut N2	800246	Node
Intrusion_Plot_Option	Max	
Time_Step_Range T_start	18	
Time_Step_Range T_end	49	
Tracking_System N1	20082769	Node
Tracking_System N2	20082726	Node
Tracking_System N3	20082806	Node
Driver_Seat_And_Mid_Door_Coordinate_Inputs Hpoint_X	3324.55	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Seat_centerline_Y	-450	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Hpoint_Z	625	
Driver_Seat_And_Mid_Door_Coordinate_Inputs mid_door_z	625	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Apillar_Position_X	2250	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Bpillar_Position_X	3000	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Rear_dummyH_point_X	3600	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Thorax_Upper	800	
Driver_Seat_And_Mid_Door_Coordinate_Inputs Thorax_Lower	650	

### Inputs:

- 1) The component IDs representing pre-crash components such as body side outer panels (LH & RH), roof, doors LH & RH as shown below
- 2) The component IDs required for intrusion calculations (Bpillar Inner & Outer parts) as shown below
- 3) The component IDs for plotting body side intrusions (Front & rear Fender, Front & rear door parts) as shown below
- 4) The 2 IDs required for Bpillar section cut
- 5) The intrusion plotting option (Max step or Last step or user specified time step)
- 6) Time step start & end range for plotting (or tracing) the Bpillar section cut profile
- 7) The 3 node IDs required for defining tracking system
- 8) Various driver seat and mid door coordinate inputs required for creating structural intrusions, Bpillar Inner & body side intrusion plots

### Pre\_crash\_components

This should include parts such as body side outer panels (LH & RH), roof, doors LH & RH as shown below.




### Components\_for\_intrusion\_calculation

This should include Bpillar inner & outer components as shown below.




### Components\_for\_Bodyside\_intrusion\_calculation

This should include parts such as fender, outer panel, front & rear door on the impact side as shown below.

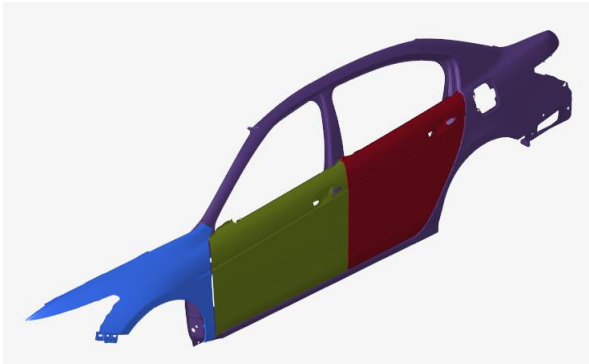


### Driver\_Seat\_And\_Mid\_Door\_Coordinate\_Inputs

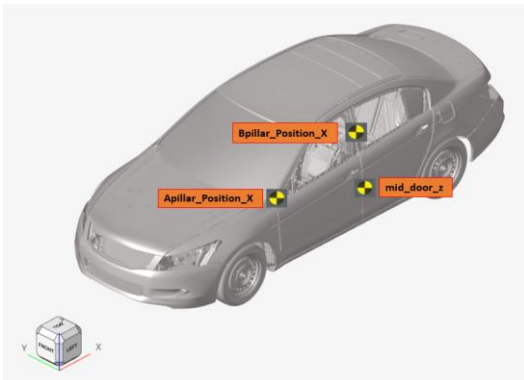


## IIHS Side MDB Intrusion Plot

Structural Results	Max Intrusion	GOOD	ACCEPATABLE	MARGINAL	POOR	FAC PDG
B-Pillar Intrusion Relative to Seat Centerline	-42.4	-125	-50	0.0	0.0	0

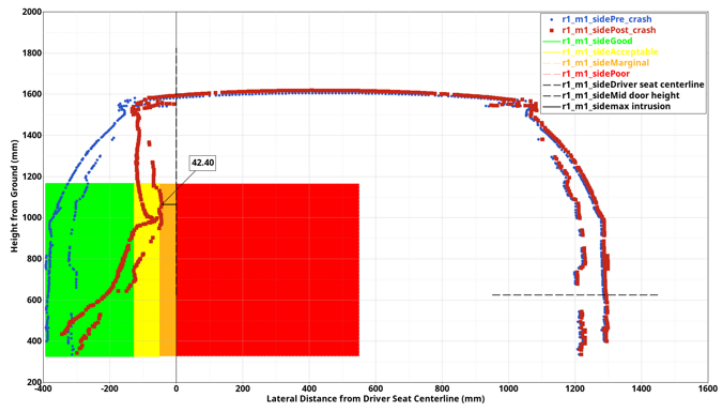


<b>BPillar postcrash position(mm)</b>	-492.4
Driver seat centerline precrash position(mm)	-450.0
<b>BPillar distance beyond precrash position of driver seat centerline(mm)</b>	-42.4
*Rounded value used for rating structure(mm)	-42.4
Structure rating	Marginal


## BPillar Inner

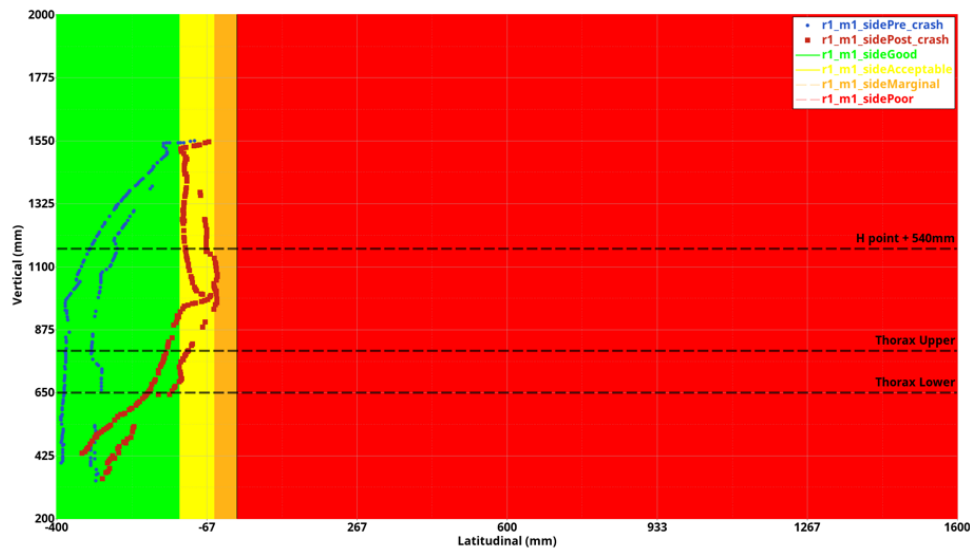

## User Defined Intrusion

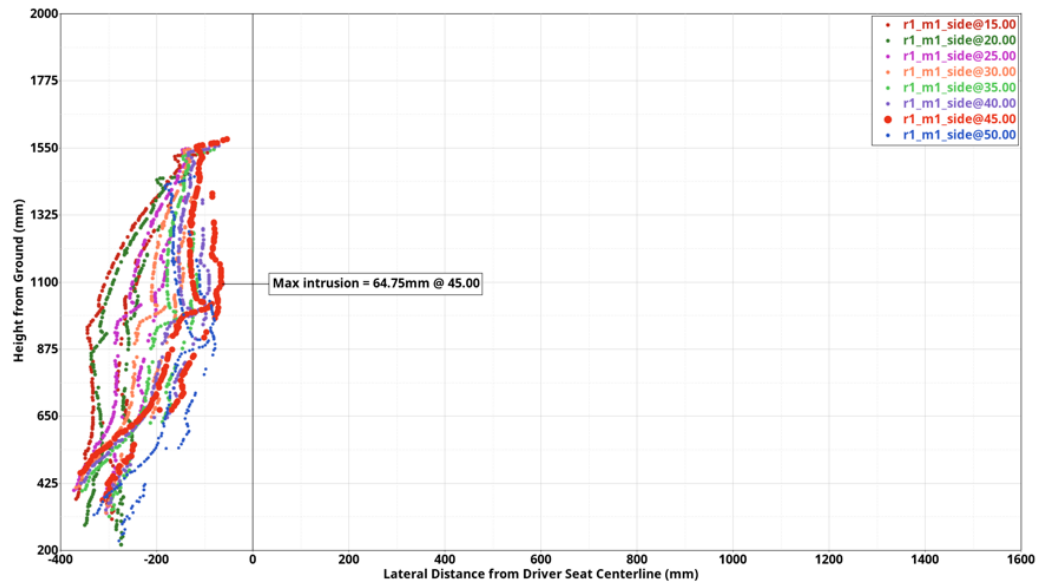



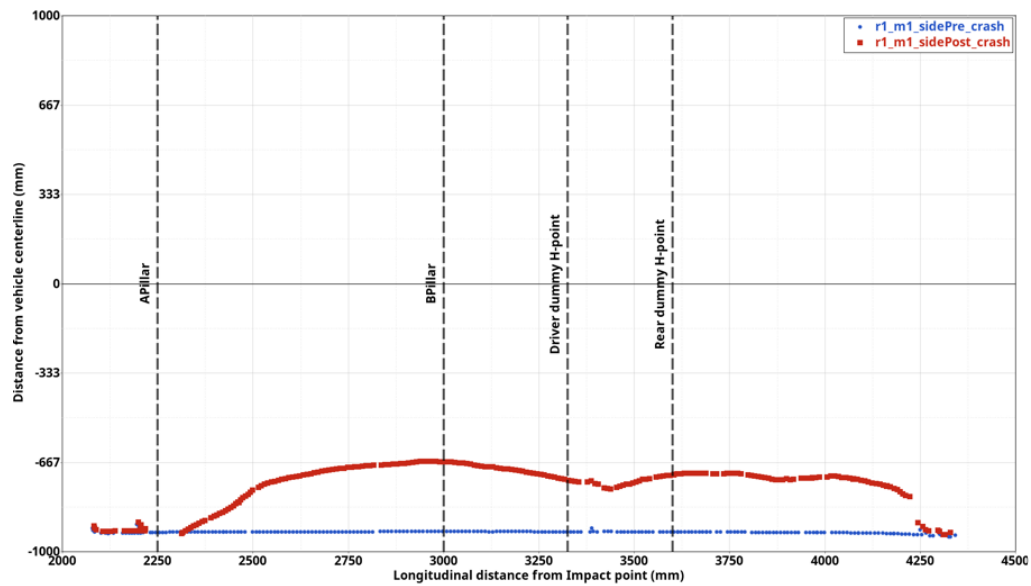














## IIHS Bodyside MDB Intrusion Plot



## User Defined Output

As the name suggests this module allows users to plot program specific Time History data. The plots are created based on user defined list of inputs as shown in the UI below.


Run	Module	Overlay	Configuration									
	Dash Intrusion Contour Plot	false	#Title	Subcase	Y Type	Y Request	Y Component	Filter	Note	X Axis Scale	Y Axis Scale	Window
	Dash Intrusion Cross Section	true	1	udo_1	nodout	nodout	Local_rkr_in_bpl 100	ry_displacement	CFC 60	Yes	1	1
	Deformed Shape	true		udo_2	nodout	nodout	Local_rkr_in_bpl 100	rx_displacement	CFC 60	No	1	1
	Energy Distribution	true		udo_3	glistat	glistat	glistat	hourglass_energy	CFC 60	No	1	1
	Engine Mount Failure	false		udo_4	glistat	glistat	glistat	internal_energy	CFC 60	No	1	1
	Explored View	false		udo_5	matsum	matsum	BR-Stopper_2mm 290	x_momentum	CFC 60	Yes	1	1
	Load Path	true		udo_6	matsum	matsum	JRT-15K873-A2BPK	z_momentum	CFC 60	Yes	1	1
	Occupant	true		udo_7	rbdout	rbdout	1005_1	dircos_22	CFC 60	Yes	1	1
	Pedal Column Motion	true		udo_8	rcforc	rcforc	Vehicle200B_IH50ts	y_force	CFC 60	Yes	1	1
	Run Statistics	false		udo_9	rcforc	rcforc	SteeringColumn2Suro	x_moment	CFC 60	Yes	1	1
	Structural Assessment	false		udo_10	secdorc	secdorc	Tunnel1 100050	y_centroid	CFC 60	Yes	1	1
	Structural Vehicle Kinematics	false										
	Structure Plastic Strain	false										
	User Defined Output	true										
	Vehicle Kinematics Vertical	true										
	Vehicle Kinematics XY Disp	true										
	Wheel Kinematics	false										

1 of 20 selected

## Inputs:

For each user defined plot, following set of inputs are required.

- Label to be used as plot header
- Subcase name, Y Type, Y Request & Y Component from the Time History file
- Filter class to be used
- Note with Min & Max value is required to be created
- X & Y axes scale factors if required to be used
- Window number to be used when plotting the curves
- Y axis unit to be used for plotting the Y vector

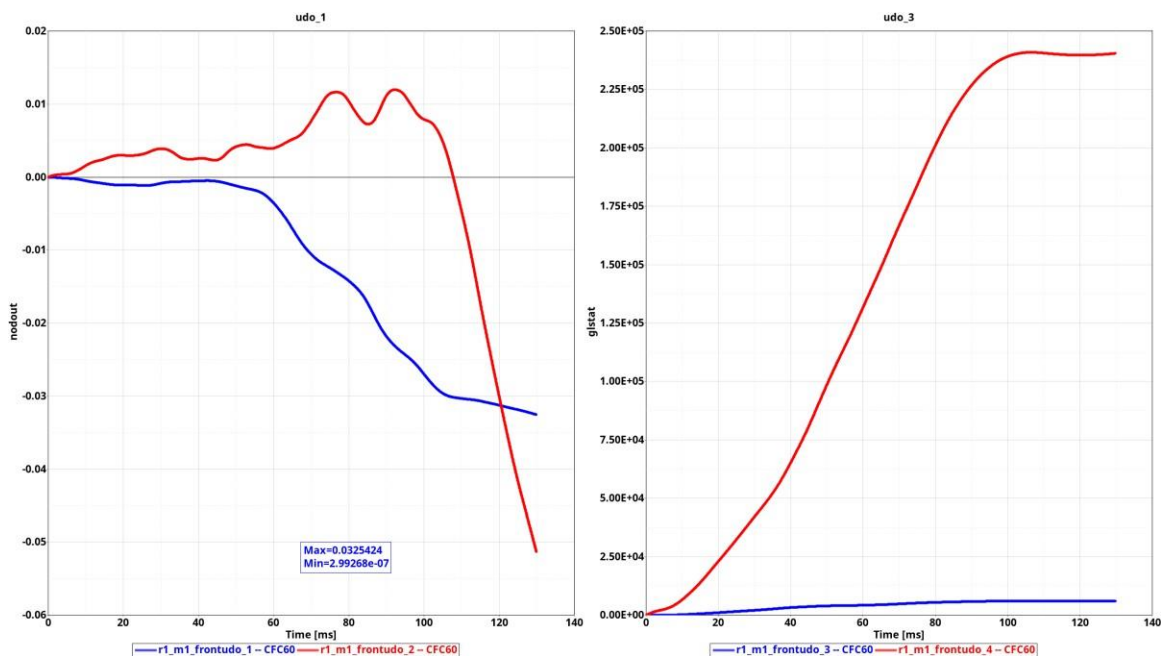


## Vehicle Yaw Pitch Roll

This module generates the summary report capturing the vehicle rotations (yaw, pitch & roll) for the user selected coordinate frames. The module requires input selection of 2 nodes to define just the X-axis definition, or 3 nodes to define the X-axis and the XY-plane.

The Yaw, Pitch and Roll angles are calculated using Euler angles with the definition at Time=0.0 taken as the starting orientation. The default for the rotation sequence is "ZYX" and the user has the option to change to any of 5 other pre-defined sequences. User can also select between plotting 2 of the 3 angles or all 3 angles. If input is defined for the Left-Hand Side and Right-Hand Side coordinate systems, the average of the two is also plotted.

- 1) It plots LHS, RHS & Average yaw, pitch & roll plots based on the inputs defined
- 2) It also creates a summary table with the yaw, pitch & roll values (in degrees)

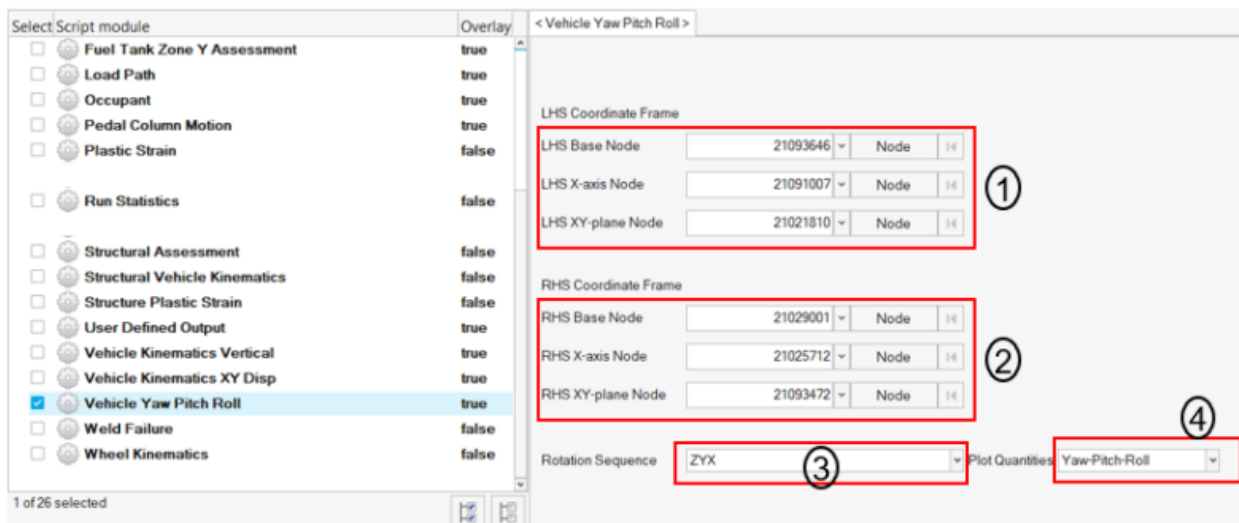


### Inputs:

- 1) 3 nodes defining LHS coordinate frame (3D model)
- 2) 3 nodes defining RHS coordinate frame (3D model)
- 3) Rotation sequence (ZYX, ZXY, XYZ, XZY, YZX & YXZ)
- 4) Quantity to be plotted

## Outputs:

Vehicle Yaw / Pitch / Roll			
Side	Yaw [degrees]	Pitch [degrees]	Roll [degrees]
LHS	8.138	2.313	3.538
RHS	8.402	1.967	3.669
AVG	0.804	0.228	3.603

## Vehicle YawPitchRoll Plot

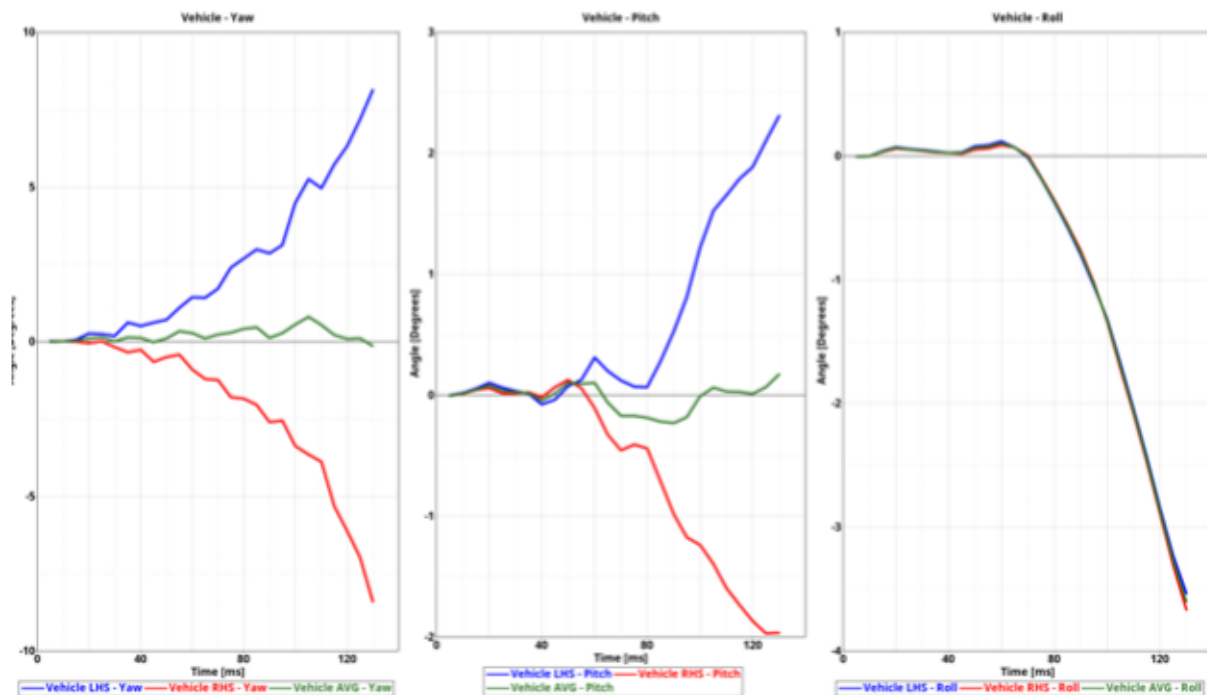


## Velocity Separation

This module generates velocity plots for the selected vehicle and the barrier nodes during impact. Then finds out the time & velocity at which separation happens.


< Velocity Separation >

Vehicle\_node

 TRC

①

Barrier\_node


 TRC

②

### Inputs:

- 1) Vehicle node (request ID) ID from Time History file (binout)
- 2) Barrier node (request ID) ID from Time History file (binout)

## Velocity Separation

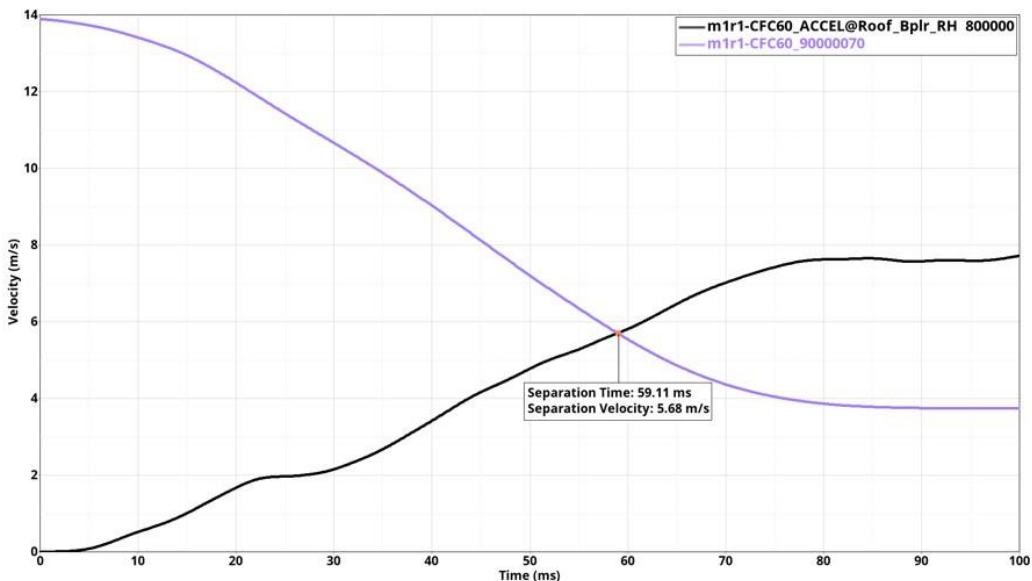

Impact Separation Time	59.11
Impact Separation Velocity	5.68


## Weld Failure

This module generates a detailed report of all the welds ruptured based on the user selected weld material. Following weld types are supported.

- 1D beam spot welds
- Single hexa spot welds
- Hexa nuggets (cluster of hexa elements)
- Hexa adhesives

The detailed PPT report generated can be categorized into following different sections.

- First two slides give you the global viewpoint. It contains the complete view of the vehicle with all the ruptured welds color coded as per the failure time contour & another slide showing the cumulative graph of the ruptured welds across the simulation time steps.
- The subsequent slides capture the detailed report for each of the ruptured weld for each of the weld type found in the model.
- For 1D beam spot weld & single hexa spot weld types, the report contains an isolated view of the weld & its linked components & a graphs showing the axial, shear & resultant plots across the time steps.
- For hexa nuggets & hexa adhesive weld types, the report contains detailed view of the weld containing the linked components.

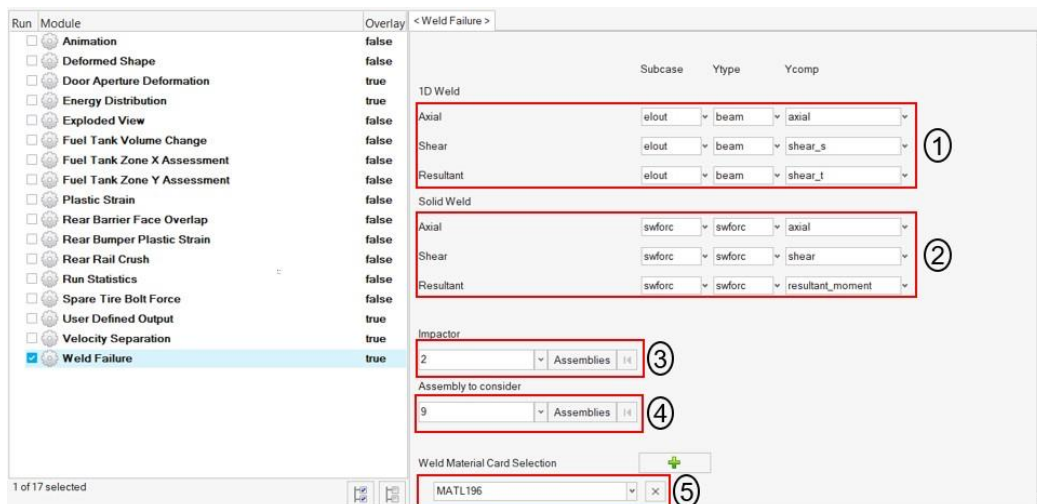

Run	Module	Overlay	< Weld Failure >
<input type="checkbox"/>	Animation	false	
<input type="checkbox"/>	Deformed Shape	false	
<input type="checkbox"/>	Door Aperture Deformation	true	
<input type="checkbox"/>	Energy Distribution	true	
<input type="checkbox"/>	Exploded View	false	
<input type="checkbox"/>	Fuel Tank Volume Change	false	
<input type="checkbox"/>	Fuel Tank Zone X Assessment	false	
<input type="checkbox"/>	Fuel Tank Zone Y Assessment	false	
<input type="checkbox"/>	Plastic Strain	false	
<input type="checkbox"/>	Rear Barrier Face Overlap	false	
<input type="checkbox"/>	Rear Bumper Plastic Strain	false	
<input type="checkbox"/>	Rear Rail Crush	false	
<input type="checkbox"/>	Run Statistics	true	
<input type="checkbox"/>	Spare Tire Bolt Force	true	
<input type="checkbox"/>	User Defined Output	true	
<input type="checkbox"/>	Velocity Separation	true	
<input checked="" type="checkbox"/>	Weld Failure	true	


Subcase	Ytype	Ycomp
<b>1D Weld</b>		
Axial	elout	beam
Shear	elout	beam
Resultant	elout	beam
<b>Solid Weld</b>		
Axial	swforc	swforc
Shear	swforc	swforc
Resultant	swforc	swforc
<b>Impactor</b>		
2	Assemblies	
<b>Assembly to consider</b>		
9	Assemblies	
<b>Weld Material Card Selection</b>		
MATL196		

### Inputs:


- The time History info (binout) to be used for 1D beam spot welds axial, shear & resultant graphs
- The time History info (binout) to be used for single hexa spot welds axial, shear & resultant graphs
- Impactor assembly / component ID
- Assembly ID / Component ID list (optional) to be used to find ruptured welds for report generation
- Weld material ID used to find the ruptured welds

## Global viewpoint:

### Spot Weld Failure

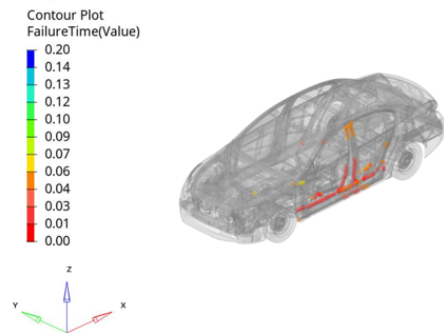


### Spot Weld Failure Plot

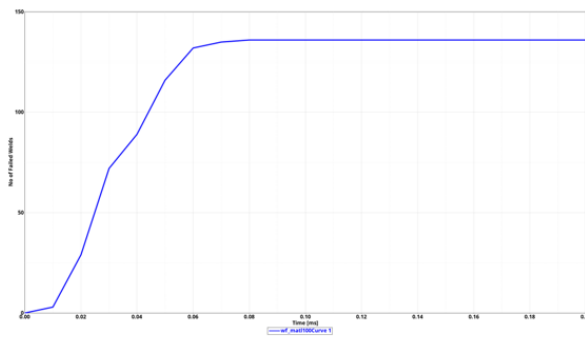


## 1D beam spot weld / Single hexa spot weld report

### Spot Weld Failure Detail View


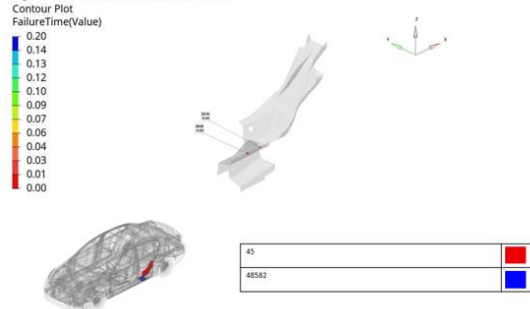


### Spot Weld Failure Plot

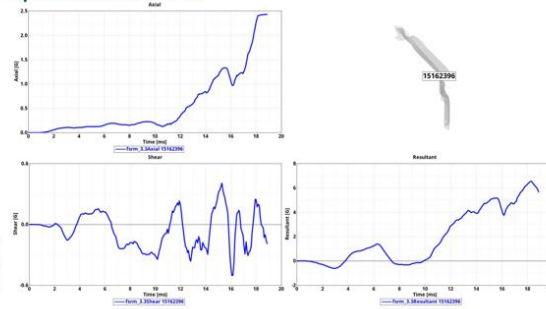

## Hexa nuggets report:

### Contour Plot FailureTime(Value)


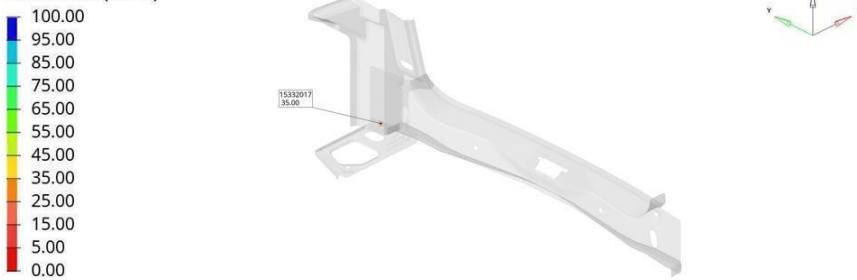


R2FB_S11146_A EXT FLR PAN SD RR 0.8mm	
R2HB-S27944-A 10 REINF RR LP OPG LWR 0.8mm	
R2HB-S40492-A 22 PNL LWR BK I S 0.7mm	

## Hexa adhesives report:

### Hexa Adhesive Failure Detail View

Contour Plot  
FailureTime(Value)



1)R2FB-S29299-A[13]BRKT QTR PNL TO WHL/HS[0.65mm  
2)FNA7537534[1]XXXX-X279A33-A (SUPT BDY SD PNL TO WHL/HS LH)[0.95mm